

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tamura](#)

[TTC-4110](#)



For any questions, you can email us directly:

sales@integrated-circuit.com



REV. Status	ADSL Inductor
REVISION - 01/14/02 MP	A. Electrical Specifications (@ 25°C)
REVISION A ADDED COUNTRY OF ORIGIN. 03/21/02 MP	1. Primary Open Circuit Inductance; 4.0mH ±5% @ 10KHz, 0.1Vrms, 100mA DC Measured (1-5) and (6-10)
REVISION B CHANGED A.3 05/28/02 MP	2. DC Resistance; (1-5)=4.5Ω MAX (6-10)=4.5Ω MAX
	3. Turns Ratio; (1-5):(6-10)=1:1.00±1%
	4. Dielectric Strength; 630Vrms 1 second @ Wdg. to Wdg.
	5. Operating Temperature Range; -40°C to +85°C

B. Marking; TTC-4110, TAMURA, country of origin and date code

C. Schematic and Mounting Footprint;

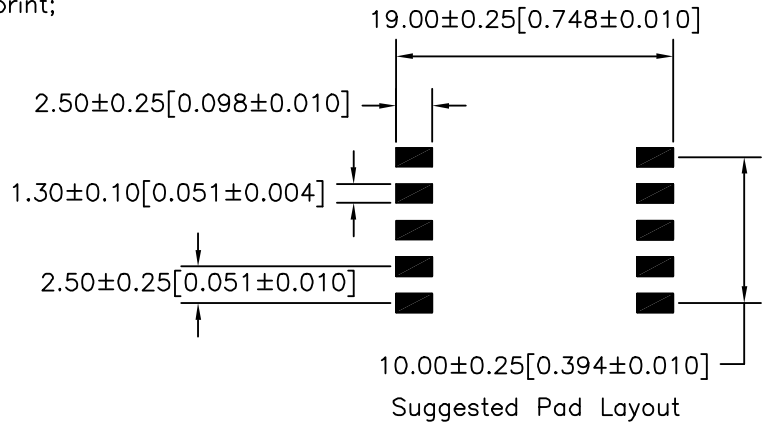

D. Mechanical Specifications;

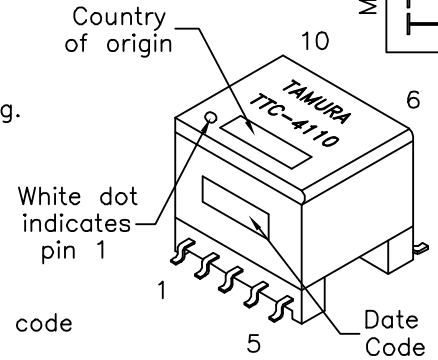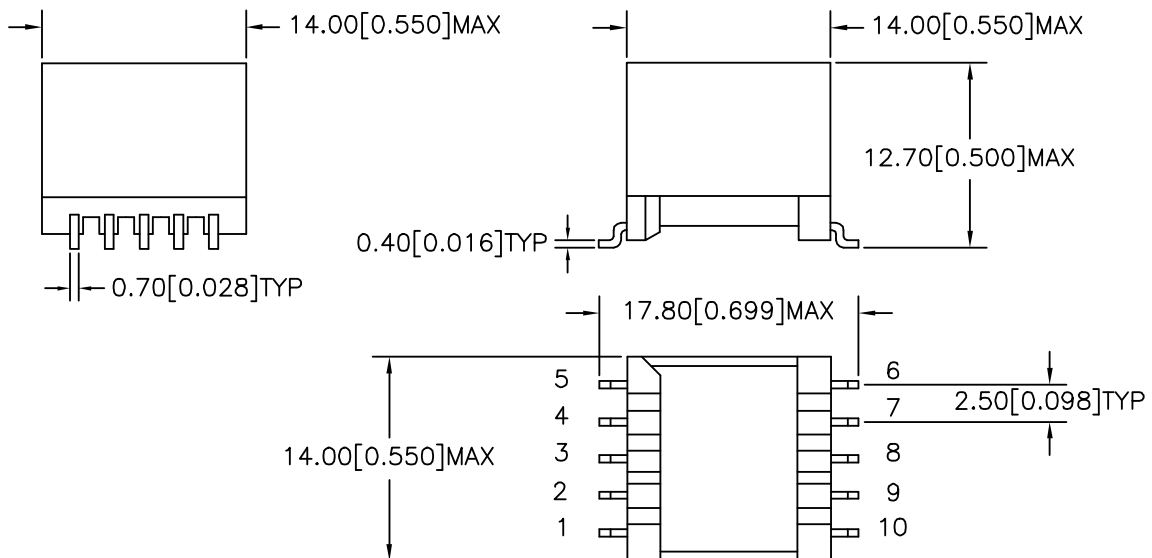

MODEL NUMBER
TTC-4110

PREPARED BY:	D. Rund
ENGINEER:	M. Pitchai
QUALITY CONTROL:	D. Kelley
APPROVED:	J. Coleman

DWG CONTROL NO. P-A1-12980 ACAD\TTC\A1129801.DWG	REV B	ADSL INDUCTOR	TTC-4110 MODEL SPECIFICATION
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482	DIM: mm(In) SCL: 3/1 SH: 1 OF 1
<p>PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.</p>			