

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[AVX Corporation](#)
[177200154006002](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Vertical Male



Series 7200 – Style A 25, 154 Contacts

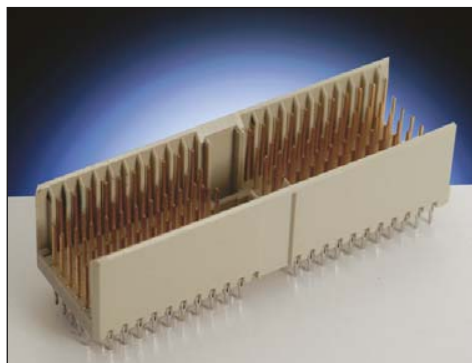


- Up to 110 signal contacts and 44 ground shield contacts in 5 or 5+2 rows of 25 positions
- Center cavity with keying option (uses 3 positions)
- See pages 52 and 53 for keying options
- Designed for gas tight press-fit installations
- This connector can be used by itself or in conjunction with Style B or C connectors
- Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 57)
- Used in positions P1 and P4 of CompactPCI® specification
- Prealignment guides



DIMENSIONS: millimeters (inches)

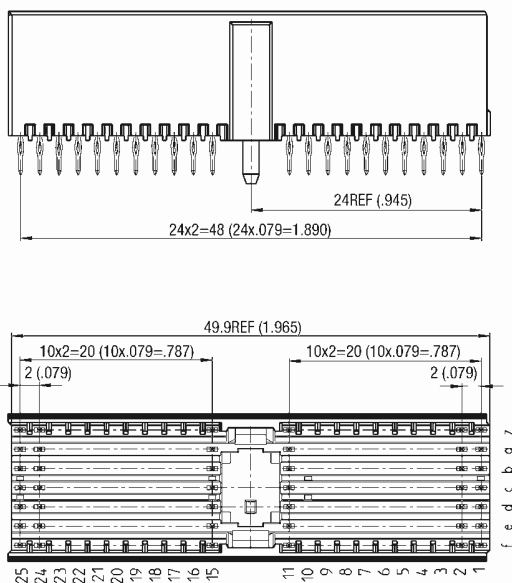

LAYOUT

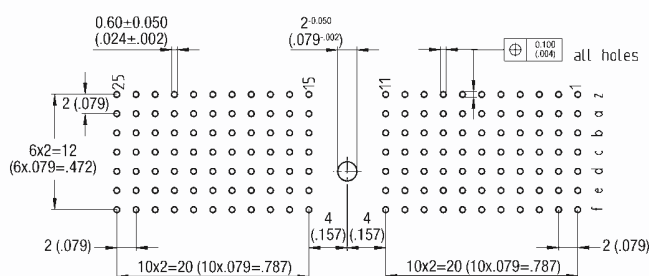



Vertical Male

Style A 25 – 154 Contacts

Pin Loading	Contacts	Performance Class	Part Number
	154	2	17 7200 154 000 002
	154	2	17 7200 154 001 002
CompactPCI® 	154	2	17 7200 154 002 005
CompactPCI® 	154	2	17 7200 154 003 005
	154	2	17 7200 154 004 005
CompactPCI® P1 / P4 	154	2	17 7200 154 005 002
CompactPCI® Hot Swap 	154	2	17 7200 154 006 002
CompactPCI® Computer Telephony 	100	2	17 7200 100 008 002

Technical description and dimensions see page 32

AVX will custom load connectors with any combination of the contacts in the table on page 35. Complete the form on page 57 and fax it to the number shown.