

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)  
[74LX1G132STR](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## 74LX1G132


### SINGLE 2-INPUT SCHMITT NAND GATE

- 5V TOLERANT INPUTS
- HIGH SPEED:  $t_{PD} = 5.5\text{ns}$  (MAX.) at  $V_{CC} = 3\text{V}$
- LOW POWER DISSIPATION:  
 $I_{CC} = 1\mu\text{A}$  (MAX.) at  $T_A = 25^\circ\text{C}$
- TYPICAL HYSTERESIS:  $V_h = 1\text{V}$  at  $V_{CC} = 4.5\text{V}$
- POWER DOWN PROTECTION ON INPUTS AND OUTPUTS
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OH}| = I_{OL} = 24\text{mA}$  (MIN) at  $V_{CC} = 3\text{V}$
- BALANCED PROPAGATION DELAYS:  
 $t_{PLH} \cong t_{PHL}$
- OPERATING VOLTAGE RANGE:  
 $V_{CC}(\text{OPR}) = 1.65\text{V}$  to  $5.5\text{V}$   
(1.2V Data Retention)
- IMPROVED LATCH-UP IMMUNITY

#### DESCRIPTION

The 74LX1G132 is a low voltage CMOS SINGLE 2-INPUT NAND GATE fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology.

The internal circuit is composed of 3 stages including buffer output, which provide high noise immunity and stable output.

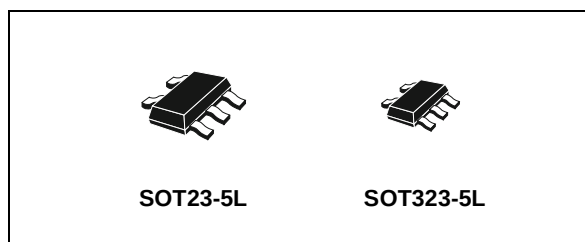

#### ORDER CODES


| PACKAGE   | T & R        |
|-----------|--------------|
| SOT23-5L  | 74LX1G132STR |
| SOT323-5L | 74LX1G132CTR |

Power down protection is provided on all inputs and 0 to 7V can be accepted on inputs with no regard to the supply voltage. This device can be used to interface 5V to 3V.

This together with its schmitt trigger function allows it to be used on line receivers with slow rise/fall input signals.


All inputs and outputs are equipped with protection circuits against static discharge.

#### PIN CONNECTION AND IEC LOGIC SYMBOLS

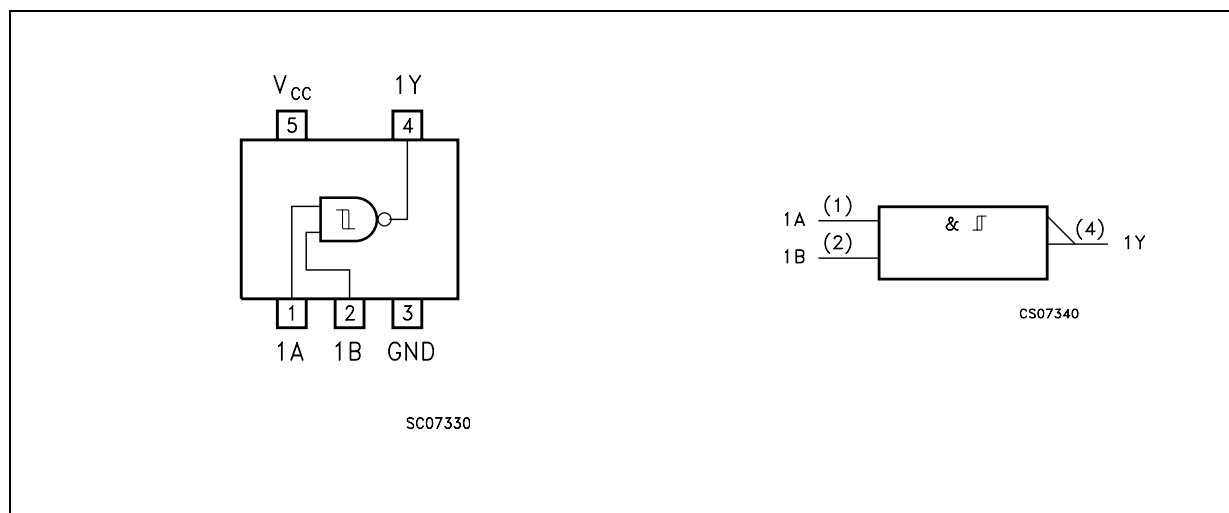

## 74LX1G132

### INPUT EQUIVALENT CIRCUIT

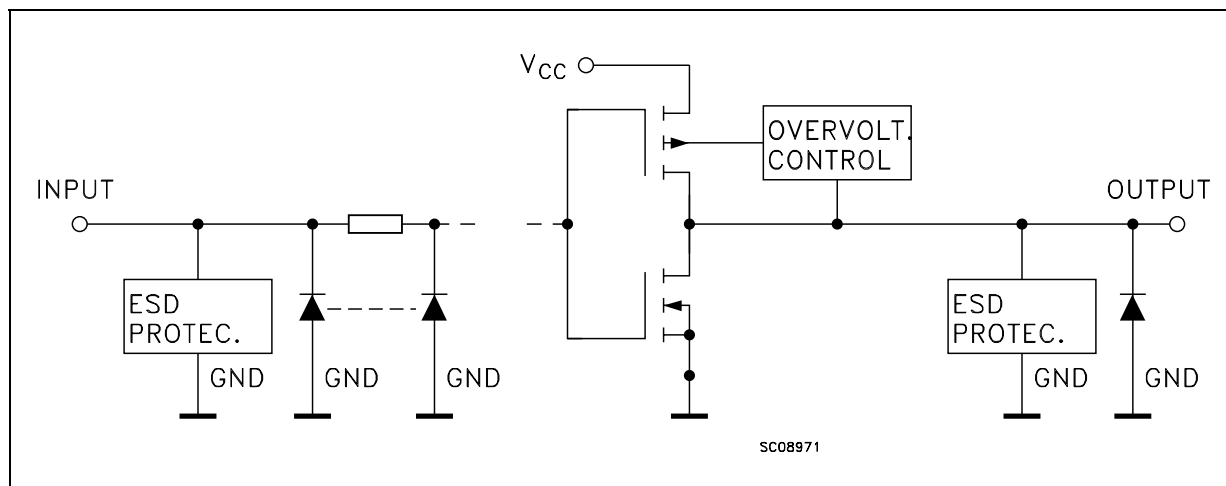

### PIN DESCRIPTION

| PIN N° | SYMBOL          | NAME AND FUNCTION       |
|--------|-----------------|-------------------------|
| 1      | 1A              | Data Input              |
| 2      | 1B              | Data Input              |
| 4      | 1Y              | Data Output             |
| 3      | GND             | Ground (0V)             |
| 5      | V <sub>CC</sub> | Positive Supply Voltage |

### TRUTH TABLE

| A | B | Y |
|---|---|---|
| L | L | H |
| L | H | H |
| H | L | H |
| H | H | L |

### ABSOLUTE MAXIMUM RATINGS

| Symbol                              | Parameter                                           | Value                         | Unit |
|-------------------------------------|-----------------------------------------------------|-------------------------------|------|
| V <sub>CC</sub>                     | Supply Voltage                                      | -0.5 to +7.0                  | V    |
| V <sub>I</sub>                      | DC Input Voltage                                    | -0.5 to +7.0                  | V    |
| V <sub>O</sub>                      | DC Output Voltage (V <sub>CC</sub> = 0V)            | -0.5 to +7.0                  | V    |
| V <sub>O</sub>                      | DC Output Voltage (High or Low State) (note 1)      | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>                     | DC Input Diode Current                              | - 50                          | mA   |
| I <sub>OK</sub>                     | DC Output Diode Current (note 2)                    | - 50                          | mA   |
| I <sub>O</sub>                      | DC Output Current                                   | ± 50                          | mA   |
| I <sub>CC</sub> or I <sub>GND</sub> | DC V <sub>CC</sub> or Ground Current per Supply Pin | ± 50                          | mA   |
| T <sub>stg</sub>                    | Storage Temperature                                 | -65 to +150                   | °C   |
| T <sub>L</sub>                      | Lead Temperature (10 sec)                           | 300                           | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

1) I<sub>O</sub> maximum rating must be observed

2) V<sub>O</sub> < GND, V<sub>O</sub> > V<sub>CC</sub>

## 74LX1G132

### RECOMMENDED OPERATING CONDITIONS

| Symbol           | Parameter                                                      | Value         | Unit |
|------------------|----------------------------------------------------------------|---------------|------|
| $V_{CC}$         | Supply Voltage (note 1)                                        | 1.65 to 5.5   | V    |
| $V_I$            | Input Voltage                                                  | 0 to 5.5      | V    |
| $V_O$            | Output Voltage ( $V_{CC} = 0V$ )                               | 0 to 5.5      | V    |
| $V_O$            | Output Voltage (High or Low State)                             | 0 to $V_{CC}$ | V    |
| $I_{OH}, I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 4.5$ to $5.5V$ )  | $\pm 32$      | mA   |
| $I_{OH}, I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 3.0$ to $3.6V$ )  | $\pm 24$      | mA   |
| $I_{OH}, I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 2.7$ to $3.0V$ )  | $\pm 12$      | mA   |
| $I_{OH}, I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 2.3$ to $2.7V$ )  | $\pm 8$       | mA   |
| $I_{OH}, I_{OL}$ | High or Low Level Output Current ( $V_{CC} = 1.65$ to $2.3V$ ) | $\pm 4$       | mA   |
| $T_{op}$         | Operating Temperature                                          | -55 to 125    | °C   |

1) Truth Table guaranteed: 1.2V to 3.6V

## 74LX1G132

### DC SPECIFICATIONS

| Symbol           | Parameter                 | Test Condition         |                                         | Value                |      |                      |      | Unit |
|------------------|---------------------------|------------------------|-----------------------------------------|----------------------|------|----------------------|------|------|
|                  |                           | V <sub>CC</sub><br>(V) |                                         | -40 to 85 °C         |      | -55 to 125 °C        |      |      |
|                  |                           |                        |                                         | Min.                 | Max. | Min.                 | Max. |      |
| V <sub>T+</sub>  | Positive Input threshold  | 1.65                   |                                         | 0.79                 | 1.16 | 0.79                 | 1.16 | V    |
|                  |                           | 2.3                    |                                         | 1.11                 | 1.56 | 1.11                 | 1.56 |      |
|                  |                           | 3                      |                                         | 1.5                  | 1.87 | 1.5                  | 1.87 |      |
|                  |                           | 4.5                    |                                         | 2.16                 | 2.74 | 2.16                 | 2.74 |      |
|                  |                           | 5.5                    |                                         | 2.61                 | 3.33 | 2.61                 | 3.33 |      |
| V <sub>T-</sub>  | Negative Input threshold  | 1.65                   |                                         | 0.39                 | 0.62 | 0.39                 | 0.62 | V    |
|                  |                           | 2.3                    |                                         | 0.58                 | 0.87 | 0.58                 | 0.87 |      |
|                  |                           | 3                      |                                         | 0.84                 | 1.14 | 0.84                 | 1.14 |      |
|                  |                           | 4.5                    |                                         | 1.41                 | 1.79 | 1.41                 | 1.79 |      |
|                  |                           | 5.5                    |                                         | 1.87                 | 2.29 | 1.87                 | 2.29 |      |
| V <sub>H</sub>   | Hysteresis Voltage        | 1.65                   |                                         | 0.37                 | 0.62 | 0.37                 | 0.62 | V    |
|                  |                           | 2.3                    |                                         | 0.48                 | 0.77 | 0.48                 | 0.77 |      |
|                  |                           | 3                      |                                         | 0.56                 | 0.87 | 0.56                 | 0.87 |      |
|                  |                           | 4.5                    |                                         | 0.71                 | 1.04 | 0.71                 | 1.04 |      |
|                  |                           | 5.5                    |                                         | 0.71                 | 1.11 | 0.71                 | 1.11 |      |
| V <sub>OH</sub>  | High Level Output Voltage | 1.65 to 4.5            | I <sub>O</sub> =-100 μA                 | V <sub>CC</sub> -0.1 |      | V <sub>CC</sub> -0.1 |      | V    |
|                  |                           | 1.65                   | I <sub>O</sub> =-4 mA                   | 1.2                  |      | 1.2                  |      |      |
|                  |                           | 2.3                    | I <sub>O</sub> =-8 mA                   | 1.9                  |      | 1.9                  |      |      |
|                  |                           | 3.0                    | I <sub>O</sub> =-16 mA                  | 2.4                  |      | 2.4                  |      |      |
|                  |                           |                        | I <sub>O</sub> =-24 mA                  | 2.2                  |      | 2.2                  |      |      |
| 4.5              | I <sub>O</sub> =-32 mA    | 3.8                    |                                         | 3.8                  |      |                      |      |      |
| V <sub>OL</sub>  | Low Level Output Voltage  | 1.65 to 4.5            | I <sub>O</sub> =100 μA                  |                      | 0.1  |                      | 0.1  | V    |
|                  |                           | 1.65                   | I <sub>O</sub> =4 mA                    |                      | 0.45 |                      | 0.45 |      |
|                  |                           | 2.3                    | I <sub>O</sub> =8 mA                    |                      | 0.3  |                      | 0.3  |      |
|                  |                           | 3.0                    | I <sub>O</sub> =16 mA                   |                      | 0.4  |                      | 0.4  |      |
|                  |                           |                        | I <sub>O</sub> =24 mA                   |                      | 0.55 |                      | 0.55 |      |
|                  |                           | 4.5                    | I <sub>O</sub> =32 mA                   |                      | 0.55 |                      | 0.55 |      |
| I <sub>I</sub>   | Input Leakage Current     | 1.65 to 5.5            | V <sub>I</sub> = 0 to 5.5V              |                      | ± 10 |                      | ± 10 | μA   |
| I <sub>off</sub> | Power Off Leakage Current | 0                      | V <sub>I</sub> or V <sub>O</sub> = 5.5V |                      | 10   |                      | 10   | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current  | 1.65 to 5.5            | V <sub>I</sub> = V <sub>CC</sub> or GND |                      | 10   |                      | 10   | μA   |

## 74LX1G132

### AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3\text{ns}$ )

| Symbol                            | Parameter              | Test Condition         |                        |                       |                                         | Value        |      |               |      | Unit |
|-----------------------------------|------------------------|------------------------|------------------------|-----------------------|-----------------------------------------|--------------|------|---------------|------|------|
|                                   |                        | V <sub>CC</sub><br>(V) | C <sub>L</sub><br>(pF) | R <sub>L</sub><br>(Ω) | t <sub>s</sub> = t <sub>r</sub><br>(ns) | -40 to 85 °C |      | -55 to 125 °C |      |      |
|                                   |                        |                        |                        |                       |                                         | Min.         | Max. | Min.          | Max. |      |
| t <sub>PLH</sub> t <sub>PHL</sub> | Propagation Delay Time | 1.65 to 1.95           | 15                     | 1MΩ                   | 3.0                                     | 2            | 12.0 | 2             | 12.0 | ns   |
|                                   |                        | 2.3 to 2.7             |                        |                       |                                         | 2            | 7.0  | 2             | 7.0  |      |
|                                   |                        | 3.0 to 3.6             |                        |                       |                                         | 1            | 6.0  | 1             | 6.0  |      |
|                                   |                        | 4.5 to 5.5             |                        |                       |                                         | 1            | 5.5  | 1             | 5.5  |      |
|                                   |                        | 1.65 to 1.95           | 30                     | 1000                  | 2.0                                     | 2            | 11.0 | 2             | 11.0 |      |
|                                   |                        | 2.3 to 2.7             | 30                     | 500                   | 2.0                                     | 2            | 6.5  | 2             | 6.5  |      |
|                                   |                        | 2.7                    | 50                     | 500                   | 2.5                                     | 1            | 6.5  | 1             | 6.5  |      |
|                                   |                        | 3.0 to 3.6             | 50                     | 500                   | 2.5                                     | 1            | 5.5  | 1             | 5.5  |      |
|                                   |                        | 4.5 to 5.5             | 50                     | 500                   | 2.5                                     | 1            | 5.0  | 1             | 5.0  |      |


### CAPACITIVE CHARACTERISTICS

| Symbol          | Parameter                                 | Test Condition         |                         | Value                  |      |      | Unit |
|-----------------|-------------------------------------------|------------------------|-------------------------|------------------------|------|------|------|
|                 |                                           | V <sub>CC</sub><br>(V) |                         | T <sub>A</sub> = 25 °C |      |      |      |
|                 |                                           |                        |                         | Min.                   | Typ. | Max. |      |
| C <sub>IN</sub> | Input Capacitance                         | 0                      |                         |                        | 5    |      | pF   |
| C <sub>PD</sub> | Power Dissipation Capacitance<br>(note 1) | 1.8                    | f <sub>IN</sub> = 10MHz |                        | 20   |      | pF   |
|                 |                                           | 2.5                    |                         |                        | 21   |      |      |
|                 |                                           | 3.3                    |                         |                        | 22   |      |      |

1)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}$

## 74LX1G132

### TEST CIRCUIT

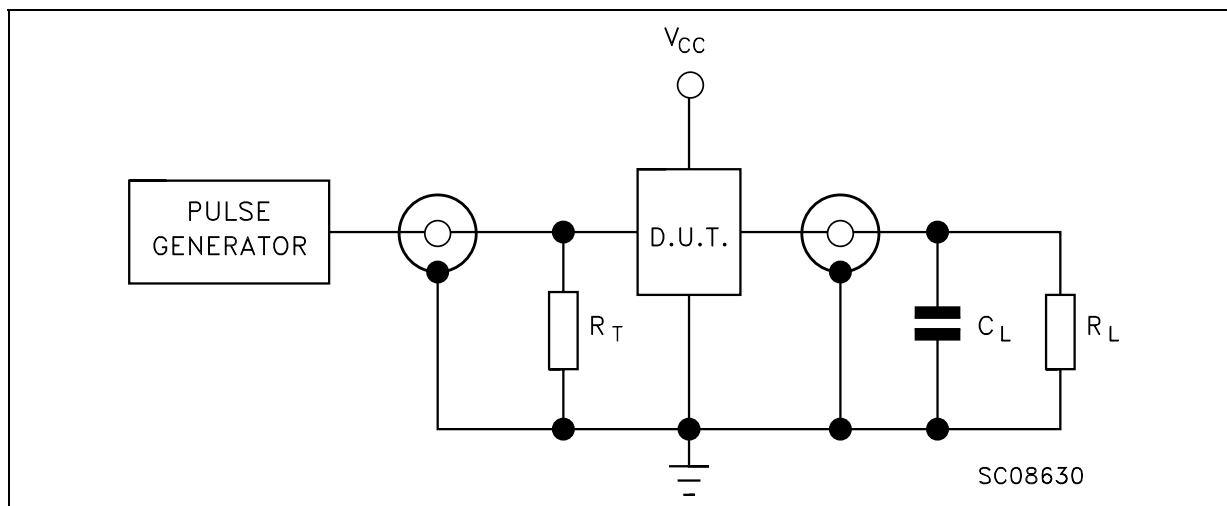


$R_T = Z_{OUT}$  of pulse generator (typically 50Ω)

### TEST CIRCUIT AND WAVEFORM SYMBOL VALUE

| Symbol      | $V_{CC}$      |             |             |
|-------------|---------------|-------------|-------------|
|             | 1.65 to 1.95V | 2.3 to 2.7V | 2.7 to 5.5V |
| $C_L$       | 15pF/30pF     | 15pF/30pF   | 15pF/50pF   |
| $R_L$       | 1MΩ/1000Ω     | 1MΩ/500Ω    | 1MΩ/500Ω    |
| $V_{IH}$    | $V_{CC}$      | $V_{CC}$    | $V_{CC}$    |
| $V_M$       | $V_{CC}/2$    | $V_{CC}/2$  | $V_{CC}/2$  |
| $t_r = t_f$ | <2.0ns        | <2.0ns      | <2.5ns      |


### WAVEFORM: PROPAGATION DELAY (f=1MHz; 50% duty cycle)

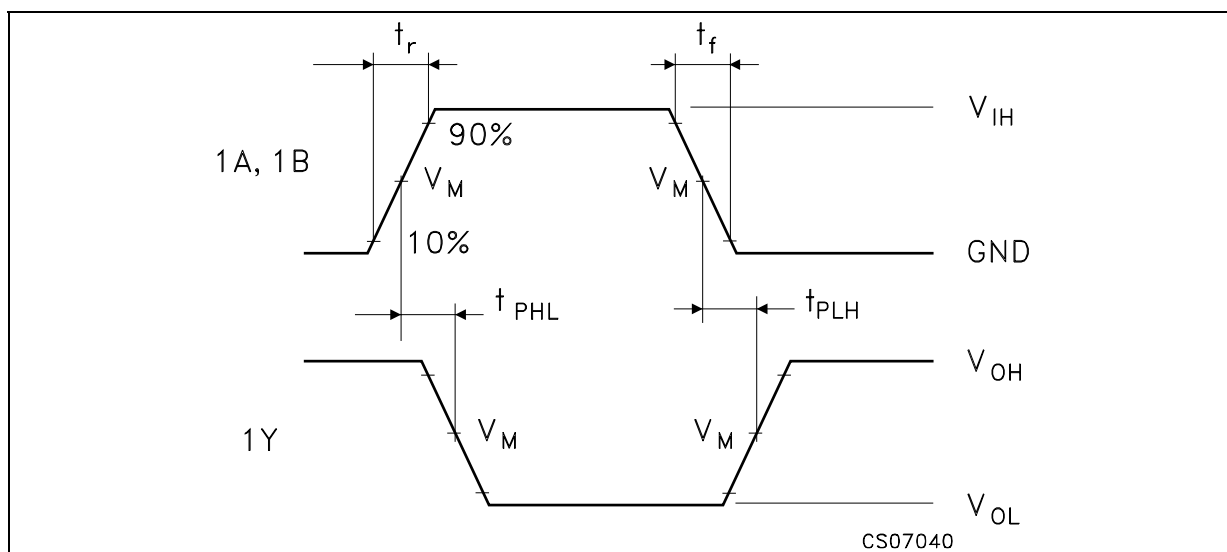

**74LX1G132**

**SOT23-5L MECHANICAL DATA**

| DIM. | mm.  |      |      | mils  |      |       |
|------|------|------|------|-------|------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP. | MAX.  |
| A    | 0.90 |      | 1.45 | 35.4  |      | 57.1  |
| A1   | 0.00 |      | 0.10 | 0.0   |      | 3.9   |
| A2   | 0.90 |      | 1.30 | 35.4  |      | 51.2  |
| b    | 0.35 |      | 0.50 | 13.7  |      | 19.7  |
| C    | 0.09 |      | 0.20 | 3.5   |      | 7.8   |
| D    | 2.80 |      | 3.00 | 110.2 |      | 118.1 |
| E    | 1.50 |      | 1.75 | 59.0  |      | 68.8  |
| e    |      | 0.95 |      |       | 37.4 |       |
| H    | 2.60 |      | 3.00 | 102.3 |      | 118.1 |
| L    | 0.10 |      | 0.60 | 3.9   |      | 23.6  |

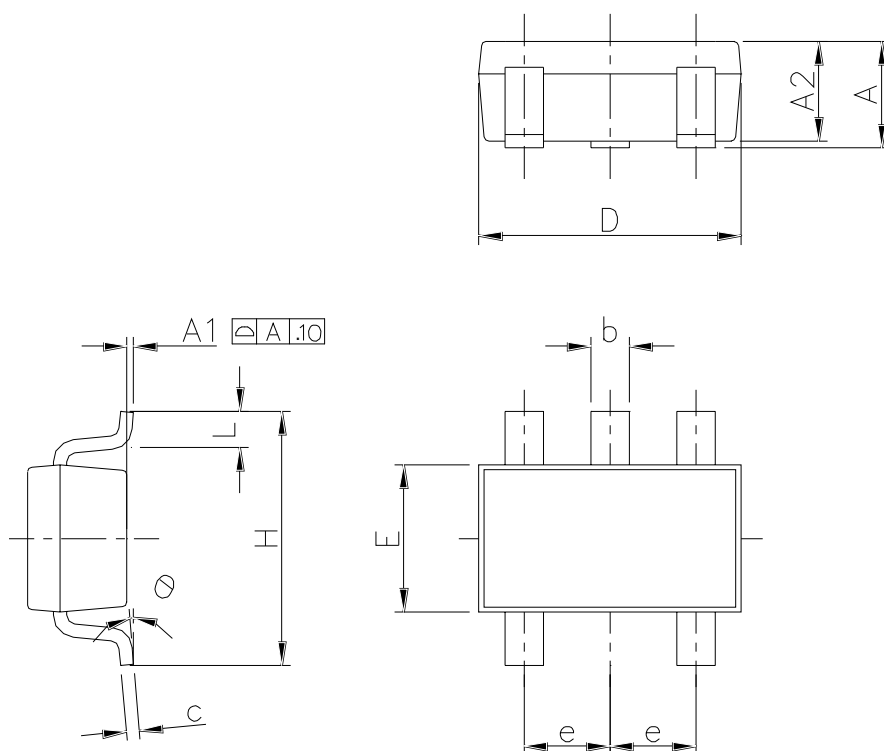


7049676C



## 74LX1G132

### SOT323-5L MECHANICAL DATA


| DIM. | mm.  |      |      | mils |      |      |
|------|------|------|------|------|------|------|
|      | MIN. | TYP  | MAX. | MIN. | TYP. | MAX. |
| A    | 0.80 |      | 1.10 | 31.5 |      | 43.3 |
| A1   | 0.00 |      | 0.10 | 0.0  |      | 3.9  |
| A2   | 0.80 |      | 1.00 | 31.5 |      | 39.4 |
| b    | 0.15 |      | 0.30 | 5.9  |      | 11.8 |
| C    | 0.10 |      | 0.18 | 3.9  |      | 7.1  |
| D    | 1.80 |      | 2.20 | 70.9 |      | 86.6 |
| E    | 1.80 |      | 2.40 | 70.9 |      | 94.5 |
| E1   | 1.15 |      | 1.35 | 45.3 |      | 53.1 |
| e    |      | 0.65 |      |      | 25.6 |      |
| e1   |      | 1.3  |      |      | 51.2 |      |
| L    | 0.10 |      | 0.30 | 3.9  |      | 11.8 |

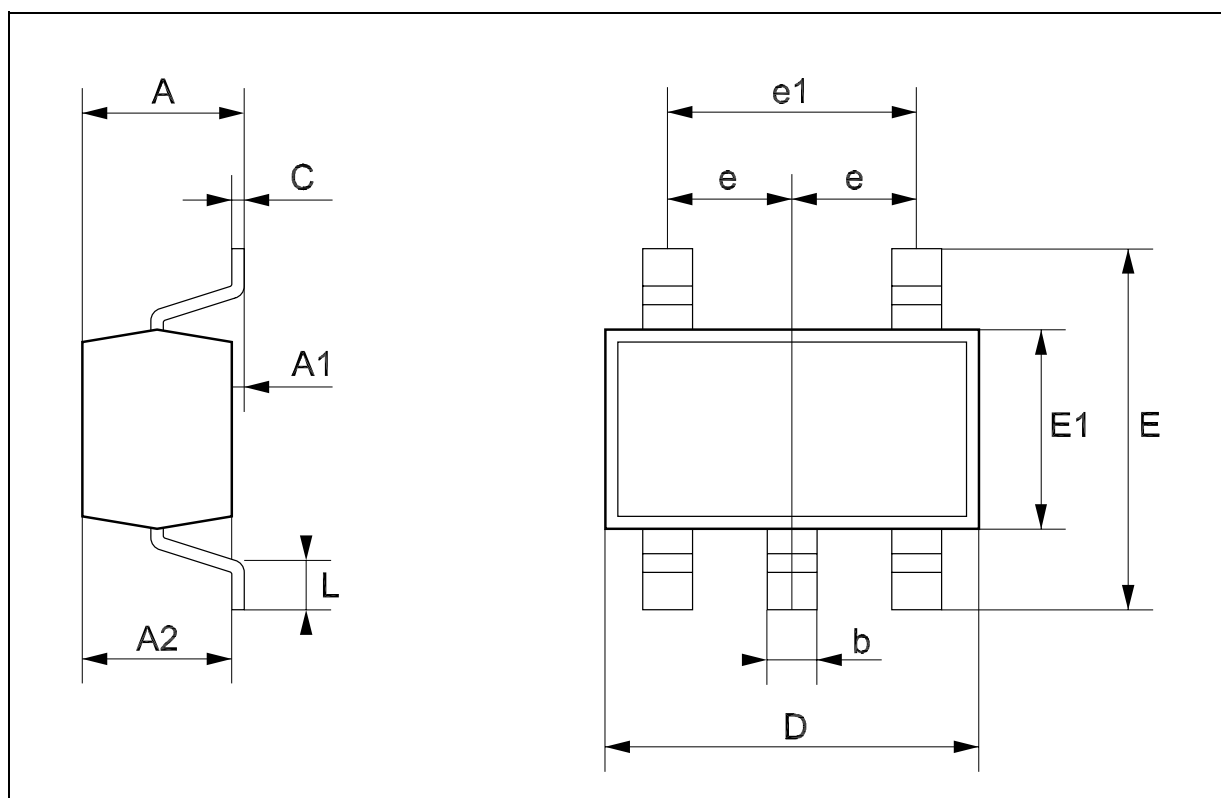

**74LX1G132**

**Tape & Reel SOT23-xL MECHANICAL DATA**


| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo   | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko   | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |

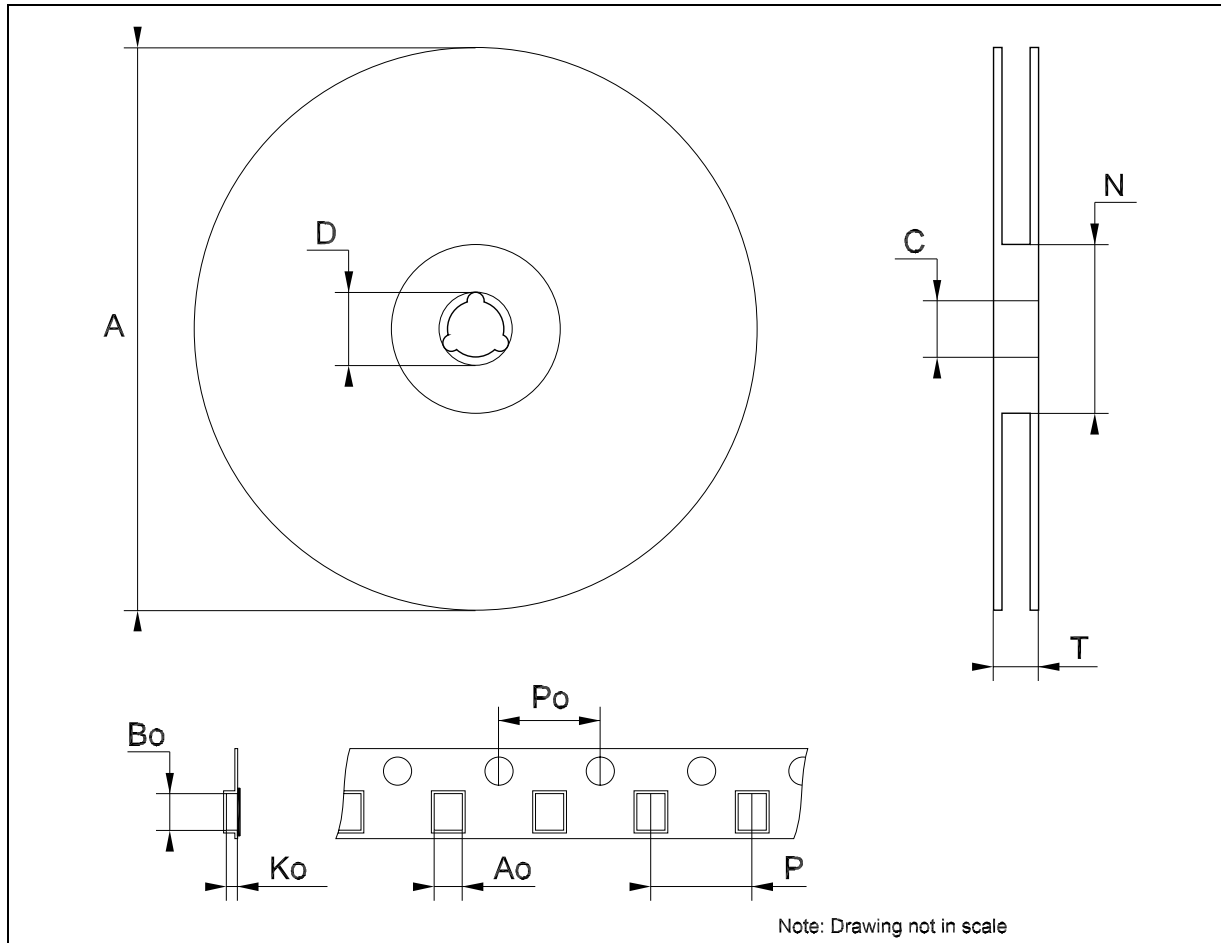

## 74LX1G132

### Tape & Reel SOT323-xL MECHANICAL DATA

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 175  | 180  | 185  | 6.889 | 7.086 | 7.283 |
| C    | 12.8 | 13   | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 59.5 | 60   | 60.5 |       | 2.362 |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   |      | 2.25 |      |       | 0.088 |       |
| Bo   |      | 2.7  |      |       | 0.106 |       |
| Ko   |      | 1.2  |      |       | 0.047 |       |
| Po   | 3.9  | 4    | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.8  | 4    | 4.2  | 0.149 | 0.157 | 0.165 |

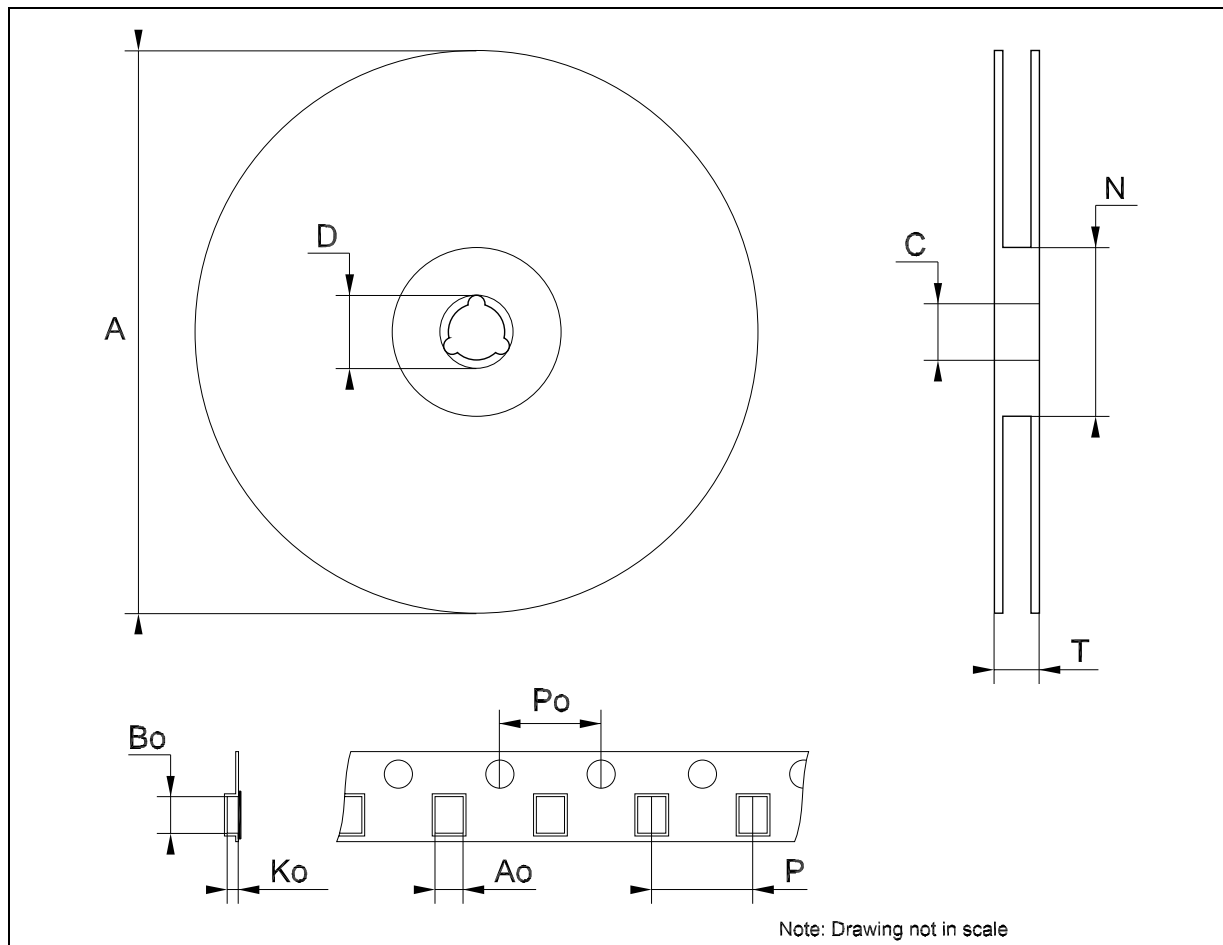

## 74LX1G132

---

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>