

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)  
[EVQ-PC005K](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Panasonic


## Light Touch Switches/EVQPC

### 5N Type Side-operational 4R Light Touch Switches

Type: **EVQPC**

#### ■ Features


- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.




#### ■ Recommended Applications

- Operating switches for electronic equipment

#### ■ Explanation of Part Numbers

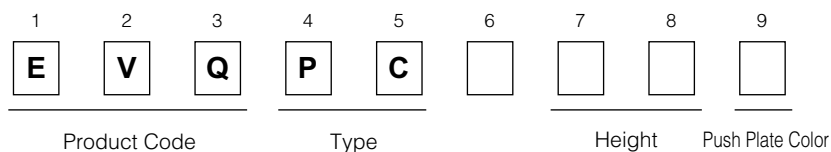

#### ■ Specifications


Type		Snap action/Push-on type SPST	
Electrical	Circuit Diagram		
	Rating	10 $\mu$ A 2 Vdc to 20 mA 15 Vdc (Resistiv load)	
	Contact Resistance	50 m $\Omega$ max.	
	Insulation Resistance	50 M $\Omega$ min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
Mechanical	Operating Force	1.0 N $\pm$ 0.4 N 1.3 N $\pm$ 0.4 N 1.6 N $\pm$ 0.5 N	2.6 N $\pm$ 0.6 N
	Travel	0.25 mm $\pm$ 0.10 mm	
Endurance	Operating Life	100000 cycles min.*	50000 cycles min.
Operating Temperature		-20 $^{\circ}$ C to +70 $^{\circ}$ C	
Storage Temperature		-40 $^{\circ}$ C to +85 $^{\circ}$ C (Bulk) -20 $^{\circ}$ C to +40 $^{\circ}$ C (Taping)	
Minimum Quantity/Packing Unit		700 pcs. Radial Taping (Reel Pack)	
Quantity/Carton		7000 pcs.	

\*1 million cycles also available, consult our salesmen.

# Panasonic

## Light Touch Switches/EVQPC

■ Dimensions in mm (not to scale)

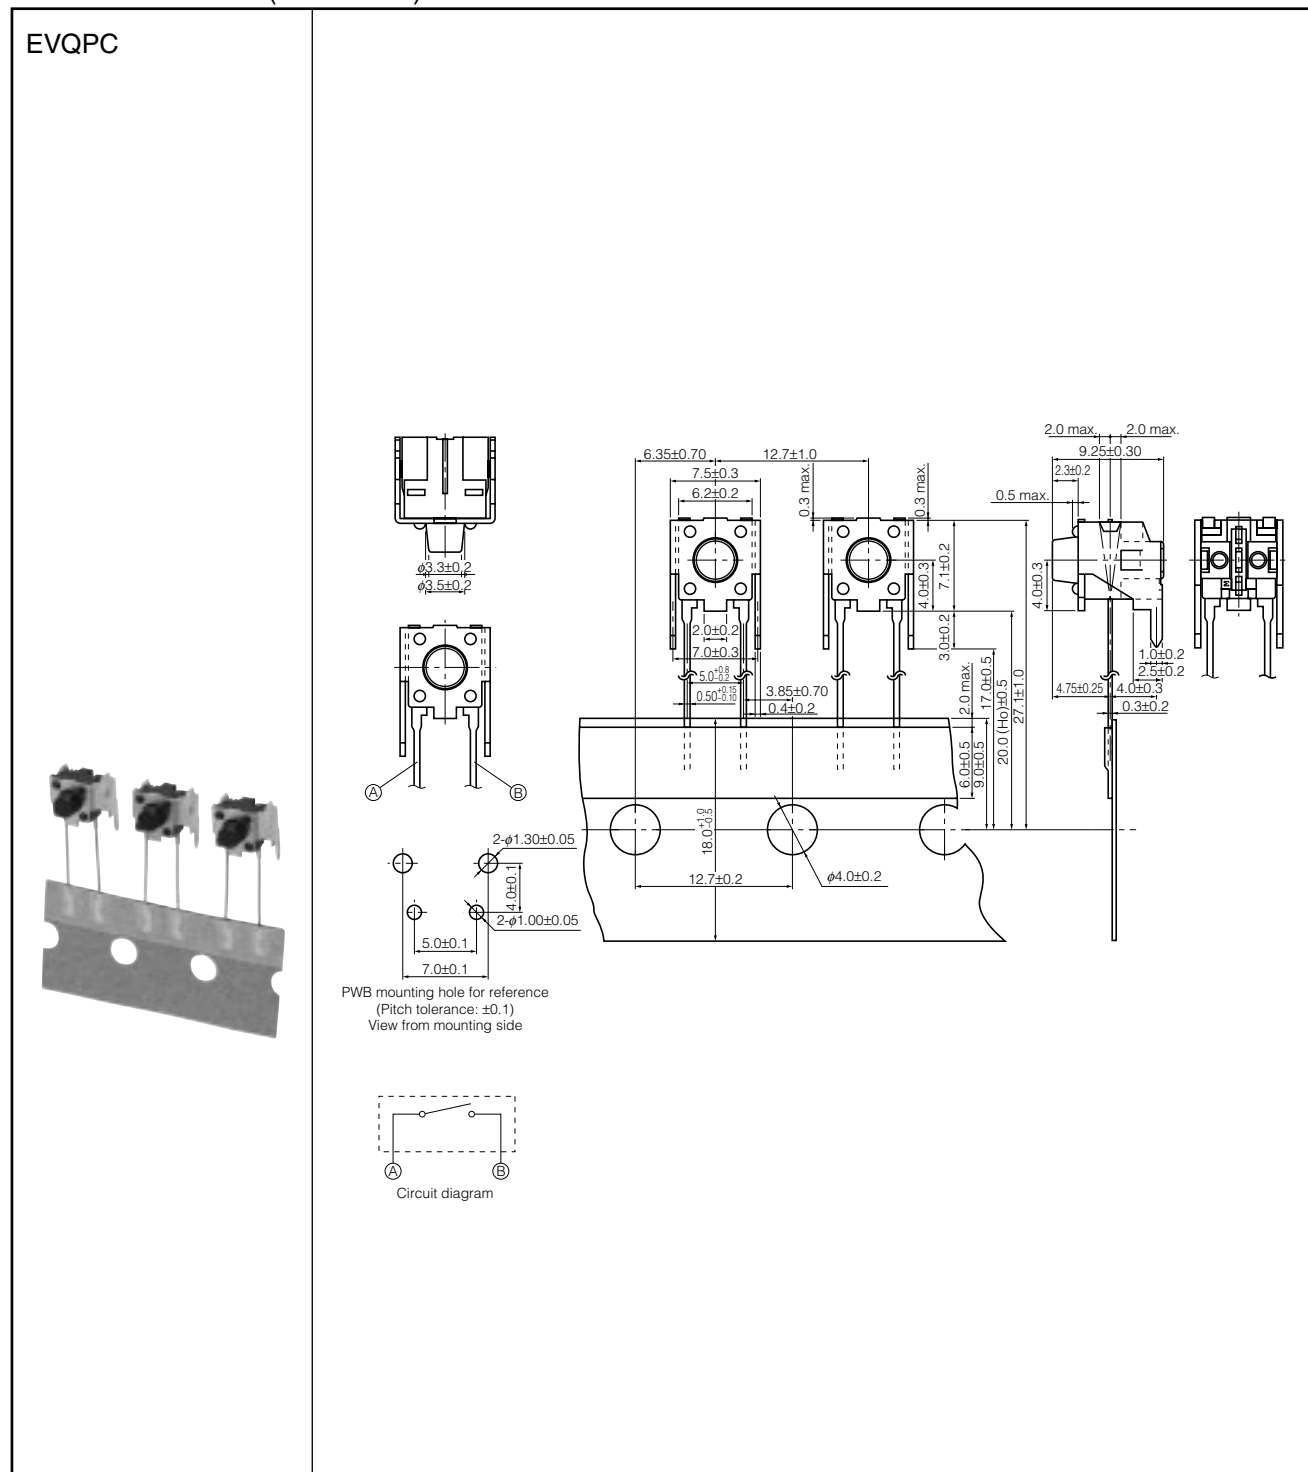

Part Numbers	Operating Force	Push Plate Place	Push Plate Color	Operating Life	Insert Machine	H <sup>o</sup> Dimension
EVQPC005K	1.0 N	4.75 mm	Black	100000 cycles	Panasert	20 mm
EVQPC105K	1.3 N	4.75 mm	Black	100000 cycles	Panasert	20 mm
EVQPC205K	1.6 N	4.75 mm	Black	100000 cycles	Panasert	20 mm
EVQPC305K	2.6 N	4.75 mm	Black	50000 cycles	Panasert	20 mm
EVQPC405K	1.0 N	4.75 mm	Black	100000 cycles	Avisert	21 mm
EVQPCP05K	1.3 N	4.75 mm	Black	100000 cycles	Avisert	21 mm
EVQPC605K	1.6 N	4.75 mm	Black	100000 cycles	Avisert	21 mm
EVQPC705K	2.6 N	4.75 mm	Black	50000 cycles	Avisert	21 mm