

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Pomona Electronics](#)  
[3231](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona®

## Model 3231 Size B Aluminum Box With Cover BNC Male/Female

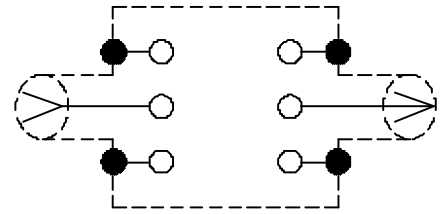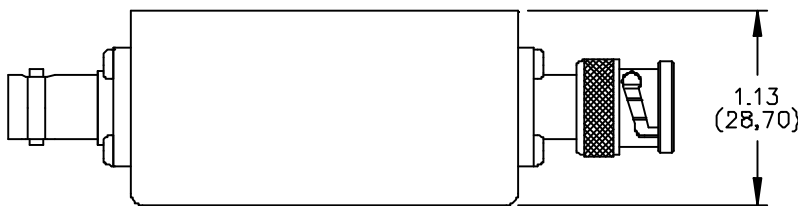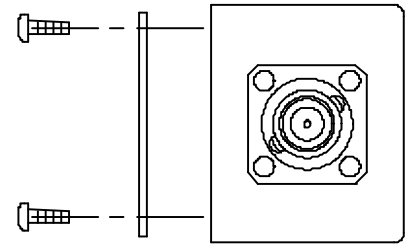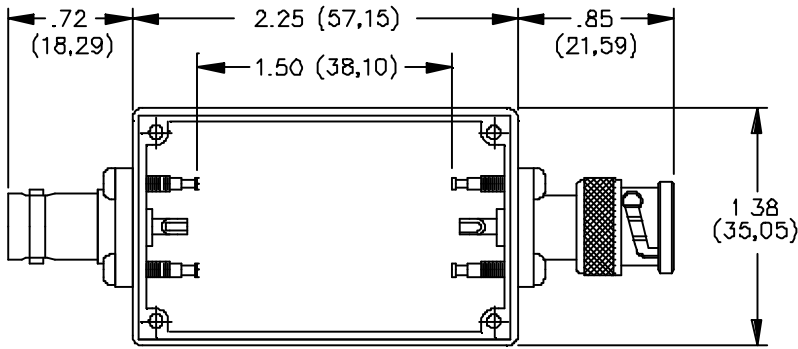

SCHMATIC

### MATERIALS:

Connector: BNC (M) & BNC (F)

Body: Tarnish Resistant Plating, Center Contact: Male – Gold Plated Brass, Female – Gold Plated Beryllium Copper

Solder Turret Terminal Screws: Steel

Shielded Housing: Die cast aluminum alloy 380 or 384.

Finish: Blue baked enamel per Fed. Std. 595 25109 over Phosphoric Etch

Cover: 1.02 (.040) thick aluminum #1100-H14

Finish: Clear anodized

Screws: 4 each #2-32 x 1/4". Pan head self-tapping. Steel.

### RATINGS:

Operating Voltage: Inner conductor/Shield: 1000 VRMS Max.

Operating Temperature: -55°C to +150°C

Nominal Impedance: 50 Ohms

### ORDERING INFORMATION: Model 3231

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA