

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0039291128](#)






For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:

- MATERIAL:
HOUSING MATERIAL: SEE CHART
TERMINAL MATERIAL: BRASS ALOY
- FINISH: SEE CHART
- PRODUCT SPECIFICATION: PS-5556-001
- PACKAGING SPECIFICATION: SEE CHART
BULK PACKED PER PK-5569-NA8 OR PK-5569-002
TRAY PACKED PER PK-5569-004, 39295083 IS TRAY PACKED
- MATES WITH 5557 SERIES MINIFIT JR RECEPTACLE
- DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
- PARTS ARE NOT DESIGNED FOR CURRENT SHARING.
- CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
- FORMING MARKS ON PINS ARE ACCEPTABLE.

ENG. NO.	HEADER MATERIAL	FINISH OF PIN
5569-NA1	NYLON 66, UL94V-2, COLOR: NATURAL	
-NA1-210	NYLON 66, UL94V-0, COLOR: NATURAL	MATTE TIN 2.54 μ m MIN. OVER NICKEL 1.27 μ m MIN.
-NA1-400	NYLON 66, UL94V-0, COLOR: BLACK	
-NA1	NYLON 66, UL94V-2, COLOR: NATURAL	
-NA1-210	NYLON 66, UL94V-0, COLOR: NATURAL	GOLD 0.76 μ m MIN. AND TIN OVER 2.54 μ m MIN. OVER NICKEL 1.27 μ m MIN.
-NA1G-400	NYLON 66, UL94V-0, COLOR: BLACK	
-NA1G2	NYLON 66, UL94V-2, COLOR: NATURAL	
-NA1G2-210	NYLON 66, UL94V-0, COLOR: NATURAL	GOLD 0.38 μ m MIN. AND TIN OVER 2.54 μ m MIN. OVER NICKEL 1.27 μ m MIN.
-NA1G3	NYLON 66, UL94V-2, COLOR: NATURAL	
5569-NA1G3-210	NYLON 66, UL94V-0, COLOR: NATURAL	GOLD 1.27 μ m MIN. AND TIN OVER 2.54 μ m MIN. OVER NICKEL 1.27 μ m MIN.

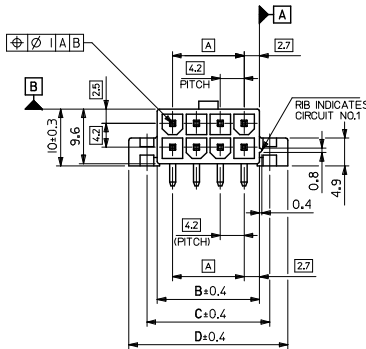

RECOMMENDED PCB HOLE LAYOUT VIEWED FROM COMPONENT SIDE 1.78 MAX. THICK P.C. BOARD


61.6	55.2	51.6	46.2	24
57.4	51	47.4	42	22
53.2	46.8	43.2	37.8	20
49	42.6	39	33.6	18
44.8	38.4	34.8	29.4	16
40.6	34.2	30.6	25.2	14
36.4	30	26.4	21	12
32.2	25.8	22.2	16.8	10
28	21.6	18	12.6	8
23.8	17.4	13.8	8.4	6
19.6	13.2	9.6	4.2	4
15.4	9	5.4	—	2
D	C	B	A	NO. OF CIRCUITS

ADD -400 P/NS	EC NO: UCP2016-0308	DRAWN: JDFX 2015/07/24	CHKD: JBEI 2015/07/24	APPROV: SMTH 2015/07/30	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
							mm	INCH	MM ONLY	DATE	2:1	METRIC	THIRD ANGLE PROJECTION
						▽=0	4 PLACES ±---	---	DRAWN BY	H. HIRAMOTO	'90/04/23	MINI FIT JR RIGHT ANGLE HEADER ASSY WITH FLANGES	
						▽=0	3 PLACES ±---	---	CHECKED BY	M. FUKUSHIMA	'91/07/04	molex	
						▽=0	2 PLACES ±0.2	---	APPROVED BY	M. ENOMOTO	'91/07/04	SD-5569-002	
						▽=0	1 PLACE ±---	---	MATERIAL NO.			DOCUMENT NO.	SHEET NO.
						▽=0	0 PLACE ±---	---	SIZE	C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							ANGULAR ± 3°		SEE CHART				




14 CTKTs.


12 CTKTs.




16 CTKTs.




10 CTKTs.




18 CTKTs.




8 CTKTs.




20 CTKTs.




6 CTKTs.



22 CTKTs.



4 CTKTs.



24 CTKTs.



2 CTKTs.

CIRCUIT SIZE LAYOUT (SCALE 2:1)

BULK PACKED				
39-29-4249	5569-24AG1-210	39-29-1247	5569-24A1-210	24
↑ -4229	↑ -22AG1-210	↑ -1227	↑ -22A1-210	22
↑ -4189	↑ -18AG1-210	↑ -1187	↑ -18A1-210	18
↑ -4169	↑ -16AG1-210	↑ -1167	↑ -16A1-210	16
↑ -4149	↑ -14AG1-210	↑ -1147	↑ -14A1-210	14
↑ -4129	↑ -12AG1-210	↑ -1127	↑ -12A1-210	12
↑ -4109	↑ -10AG1-210	↑ -1107	↑ -10A1-210	10
↑ -4089	↑ -08AG1-210	↑ -1087	↑ -08A1-210	8
↑ -4069	↑ -06AG1-210	↑ -1067	↑ -06A1-210	6
↑ -4049	↑ -04AG1-210	↑ -1047	↑ -04A1-210	4
39-29-4029	5569-02AG1-210	39-29-1027	5569-02A1-210	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CIRCUIT SIZE
5569-NAG1-210				
39-29-5243	5569-24AG1	39-29-1248	5569-24A1	24
↑ -5223	↑ -22AG1	↑ -1228	↑ -22A1	22
↑ -5203	↑ -20AG1	↑ -1208	↑ -20A1	20
↑ -5183	↑ -18AG1	↑ -1188	↑ -18A1	18
↑ -5163	↑ -16AG1	↑ -1168	↑ -16A1	16
↑ -5143	↑ -14AG1	↑ -1148	↑ -14A1	14
↑ -5123	↑ -12AG1	↑ -1128	↑ -12A1	12
↑ -5103	↑ -10AG1	↑ -1108	↑ -10A1	10
↑ -5083	↑ -08AG1	↑ -1088	↑ -08A1	8
↑ -5063	↑ -06AG1	↑ -1068	↑ -06A1	6
↑ -5043	↑ -04AG1	↑ -1048	↑ -04A1	4
39-29-5023	5569-02AG1	39-29-1028	5569-02A1	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NAG1		5569-NA1		24
				22
				20
				18
				16
				14
				12
				10
				8
				6
39-34-7045	5569-04A1GS3-210	39-34-7043	5569-04A1GS2-210	4
39-34-7025	5569-02A1GS3-210	39-34-7023	5569-02A1GS2-210	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NA1GS3-210		5569-NA1GS2-210		24
				22
				20
				18
				16
				14
				12
				10
				8
				6
39-34-7044	5569-04A1GS3	39-34-7042	5569-04A1GS2	4
39-34-7024	5569-02A1GS3	39-34-7022	5569-02A1GS2	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NA1GS3		5569-NA1GS2		24
				22
				20
				18
				16
				14
				12
				10
				8
				6

TRAY PACKED				
46999-0791	5569-24A1G-400	46999-0779	5569-24A1-400	24
↑ -0790	↑ -22A1G-400	↑ -0778	↑ -22A1-400	22
↑ -0789	↑ -20A1G-400	↑ -0777	↑ -20A1-400	20
↑ -0788	↑ -18A1G-400	↑ -0776	↑ -18A1-400	18
↑ -0787	↑ -16A1G-400	↑ -0775	↑ -16A1-400	16
↑ -0786	↑ -14A1G-400	↑ -0774	↑ -14A1-400	14
↑ -0785	↑ -12A1G-400	↑ -0773	↑ -12A1-400	12
↑ -0784	↑ -10A1G-400	↑ -0772	↑ -10A1-400	10
↑ -0783	↑ -08A1G-400	↑ -0771	↑ -08A1-400	8
↑ -0782	↑ -06A1G-400	↑ -0770	↑ -06A1-400	6
↑ -0781	↑ -04A1G-400	↑ -0769	↑ -04A1-400	4
46999-0780	5569-02A1G-400	46999-0768	5569-02A1-400	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CIRCUIT SIZE
5569-NA1G-400		5569-NA1-400		24
				22
				20
				18
				16
				14
				12
				10
				8
				6
39-34-7044	5569-04A1GS3	39-34-7042	5569-04A1GS2	4
39-34-7024	5569-02A1GS3	39-34-7022	5569-02A1GS2	2
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE
5569-NA1GS3		5569-NA1GS2		24
				22
				20
				18
				16
				14
				12
				10
				8
				6

QUALITY SYMBOLS: $\nabla=0$, $\nabla=0.2$, $\nabla=0.5$

GENERAL TOLERANCES (UNLESS SPECIFIED):

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±0.2	±---
1 PLACE	±0.2	±---
0 PLACE	±---	±---

ANGULAR ± 3°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY

SCALE: 2:1

DESIGN UNITS: METRIC

THIRD ANGLE PROJECTION

TITLE: MINI FIT JR RIGHT ANGLE HEADER ASSY WITH FLANGES

MOLEX

SEE CHART

SD-5569-002

SHEET NO. 2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION