



Distributor of NorComp : Excellent Integrated System Limited

Datasheet of 190-009-262-001 - D-Sub Connector Receptacle, Female Sockets 9 Position
Board Edge, Surface Mount, Right Angle Solder

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)

[190-009-262-001](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: 9 POS FEMALE SURFACE MOUNT


MATERIAL/FINISH:
SHELL: STEEL ZINC OR TIN PLATED
BRACKET: BRASS, NICKEL PLATED
INSULATOR: NYLON 6T - UL 94V-O, BLACK
(TEMPERATURE RESISTANCE: 250°C FOR 60 SECS.)
Pc 99 COLORFUL INSULATOR: PATONE #322C
CONTACT: PHOSPHOR BRONZE
GOLD FLASH (MATING AREA) - TIN/LEAD (TERMINATING AREA)


SPECIFICATIONS:
RATED CURRENT: 5A
RATED VOLTAGE: 300V DC
WITHSTANDING VOLTAGE: 500V (rms) AC FOR 1 MINUTE
INSULATION RESISTANCE: MORE THAN 1000M ohm AT 500V DC
CONTACT RESISTANCE: 13m ohms MAX.
DIELECTRIC STRENGTH: 1000V AC FOR 1 MINUTE

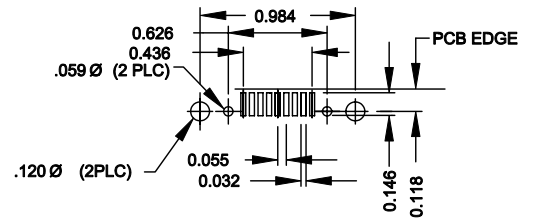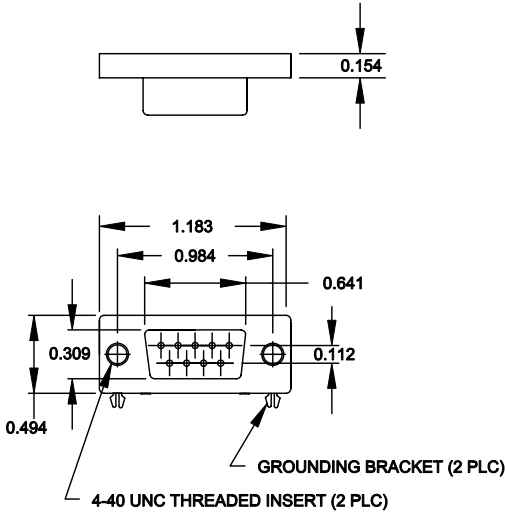

CONTACT ARRANGEMENT
1 6 2 7 3 8 4 9 5

RECOMMENDED PCB LAYOUT



	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 8-21-02
			CHECKED:	DATE:
<h1>NorComp</h1>	SCALE:	SHEET 1 OF 1	REV 1	
	DWG NO. 190-009-262-001			