

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[0031.7501](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Fuseholder Blocks & Clips

www.schurter.com/PG02b

Fuseholder Open Design, Holder for MSF 125, vertical, THT



125 V AC · 5 A (UL/CSA)



Description

- Through hole mounting

Standards

- UL 4248-1
- CSA C22.2 no. 4248.1

Approvals

- UL File Number: E39328


References

Fuseholder to MSF 125; MSU 125

Weblinks



[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	Microfuse 125 V
Mounting	PCB
Terminal	Solder THT
Rated Voltage	125V AC (UL/CSA)
Rated current	5 A (UL/CSA)
Admissible Ambient Air Temp.	-40°C to 85°C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Silver-Plated Copper Alloy
Unit Weight	0.37 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	 Type

Soldering Methods	Wave Soldering Profile
Solderability	245°C / 3 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260°C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< 5 mΩ at 20 mV
Insulation Resistance	> 10 MΩ between Life parts (500 VDC; 1 min)

Dimension

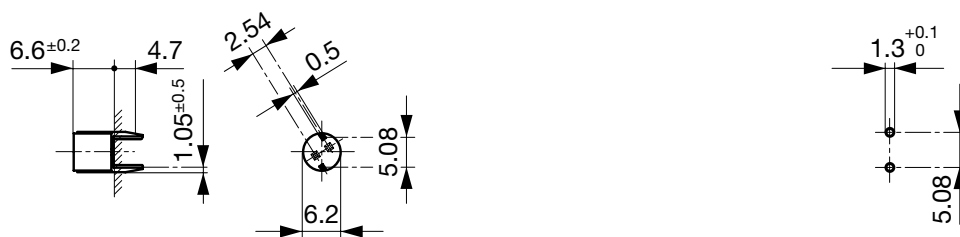

Variant 0031.7501

Drilling diagram

All Variants

Holder Order Number

● [0031.7501](#)

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

FMS (125V)

Fuseholder Blocks & Clips
www.schurter.com/PG02b

Packaging Unit Plastic Bag (100 pcs.)
