

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electric Works](#)

[AQV254R](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

NAIS

HE (High-function Economy) Type [1-Channel (Form A) Type] —With LED Display—


PhotoMOS RELAYS

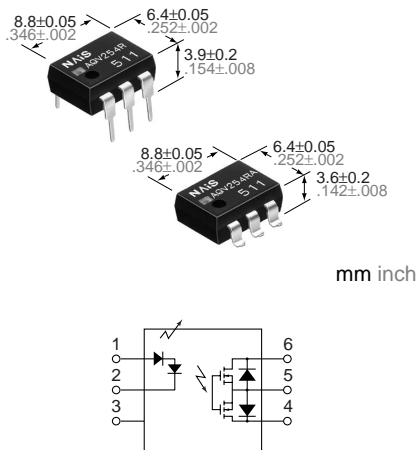

FEATURES

- **Low on resistance and LED display**
- **Same compact size of our conventional relays without LED display**
(W) 6.4×(D) 8.8×(H) 3.9 mm (W) 0.252×(D) 0.346×(H) 0.154 inch.
- **Controls low-level analog signals**
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low level voltage signals or analog signals without distortion.
- **High sensitivity and low on resistance**
A stable relay that has a low on resistance of 16 Ω, no metal contacts, and the ability to control a maximum load current of 0.25 A with an input current of 5 mA.

- **Low-level off state leakage current**
In contrast to the SSR with its off state leakage current of several milliamps, the PhotoMOS relay features a very small off state leakage current of only 100 pA even at a high load voltage of 400 V.

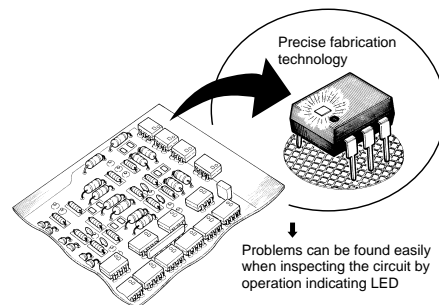

TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Game machines
- High-speed inspection machines
- Industrial equipment

TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
	Load voltage	Load current		Tube packing style	Tape and reel packing style			
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC type	400 V	150 mA	AQV254R	AQV254RA	AQV254RAX	AQV254RAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV254R(A)	Remarks	
Input	LED forward current	I _F		25 mA	f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V _R		3 V		
	Peak forward current	I _{FP}		60 mA		
	Power dissipation	P _{in}		90 mW		
Output	Load voltage (peak AC)	V _L		400 V	A connection: Peak AC, DC B, C connection: DC	
	Continuous load current	I _L		A		0.15 A
				B		0.18 A
				C		0.25 A
	Peak load current	I _{peak}		0.5 A		A connection: 100 ms (1 shot), V _L = DC
Power dissipation	P _{out}	360 mW				
Total power dissipation		P _T		410 mW		
I/O isolation voltage		V _{iso}		1,500 V AC		
Temperature limits	Operating	T _{opr}		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage	T _{stg}		-40°C to +100°C -40°F to +212°F		

AQV254R


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV254R(A)	Remarks	
Input	LED operate current	Typical	I _{Fon}	1.0 mA	I _L = Max.	
		Maximum		3.0 mA		
	LED turn off current	Minimum	I _{Foff}	0.4 mA	I _L = Max.	
		Typical		0.9 mA		
	LED dropout voltage	Typical	V _F	2.8 V	I _F = 5 mA	
		Maximum		3.5 V		
Output	On resistance	Typical	R _{on}	A	I _F = 5 mA I _L = Max. Within 1 s on time	
		Maximum				16 Ω
		Typical	R _{on}	B		I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum				
	Typical	R _{on}	C	I _F = 5 mA I _L = Max. Within 1 s on time		
	Maximum				4 Ω	
	Off state leakage current		Maximum	I _{Leak}	—	I _F = 0 V _L = Max.
	Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	—
Maximum				2 ms		
Turn off time*			Typical	T _{off}	—	I _F = 5 mA I _L = Max.
			Maximum			
I/O capacitance		Typical	C _{iso}	—	f = 1 MHz V _B = 0	
		Maximum				3 pF
Initial I/O isolation resistance		Minimum	R _{iso}	—	500 V DC	

Note: Recommendable LED forward current I_F = 5 mA.

For type of connection, see Page 31.

*Turn on/Turn off time

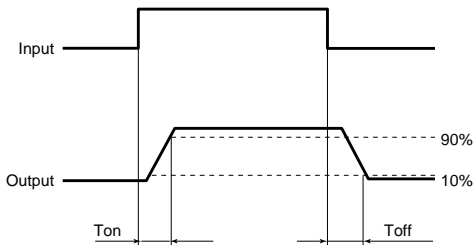


REFERENCE DATA

1. Input current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F;


Type of connection: A

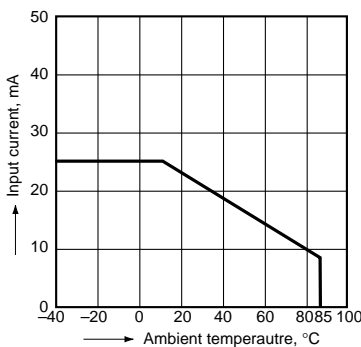

2. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F;

Type of connection: A

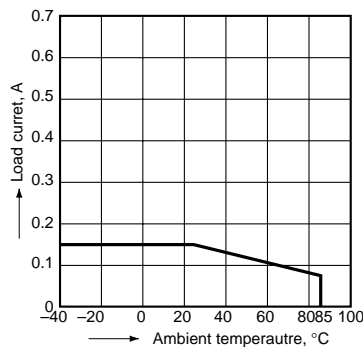

3. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC)

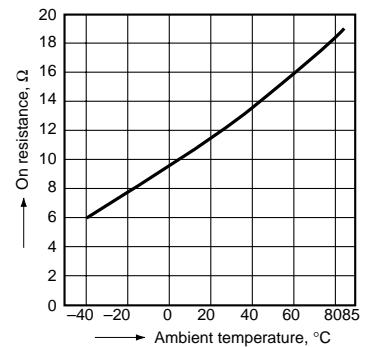

AQV254R


4. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC)

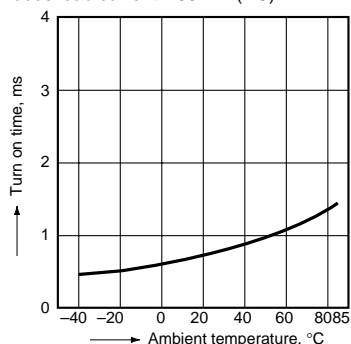


5. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC)

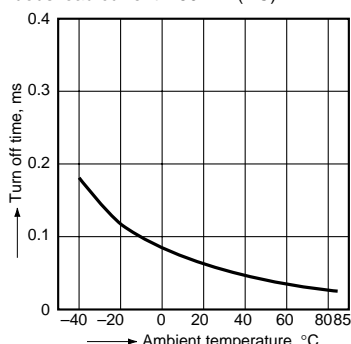


6. LED operate vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC)

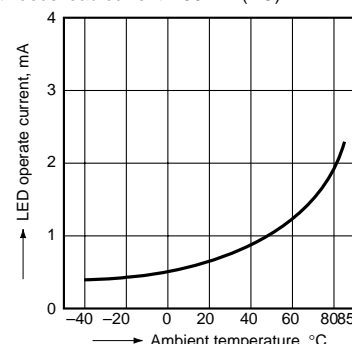


7. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC)

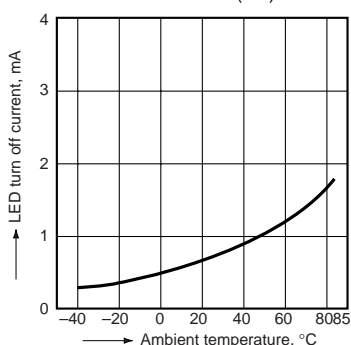


8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 25 mA

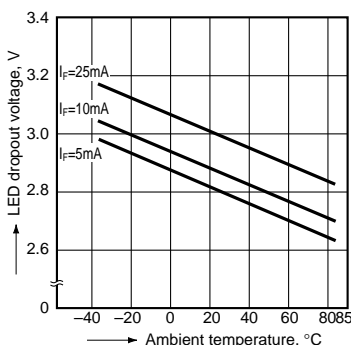


9. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




10. Off state leakage current

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

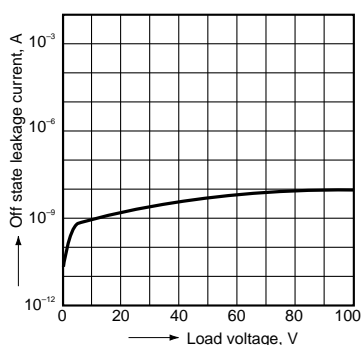


11. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC);
Ambient temperature: 25°C 77°F

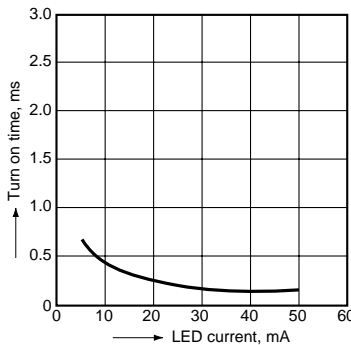

12. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 400 V (DC);
Continuous load current: 150 mA (DC);
Ambient temperature: 25°C 77°F

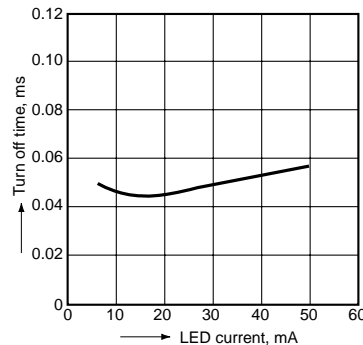

13. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

