

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Standex-Meder Electronics](#)
[LI12-1A85](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Series Datasheet – LI Reed Relays

www.standexmeder.com


LI Series

Reed Relays

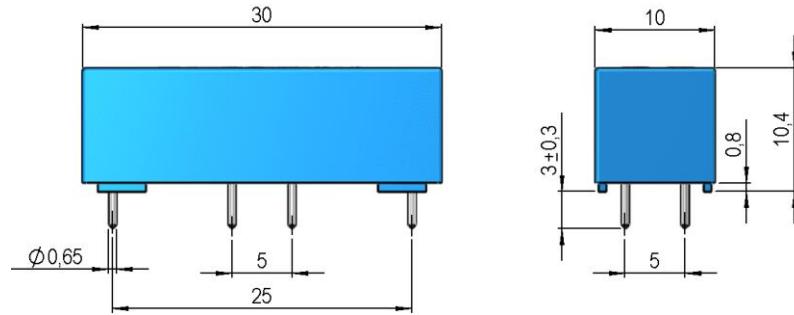

- Features: Small Size High Voltage Relay, High Dielectric Strength, High Insulation Resistance
- Applications: Cable & In-Circuit, Battery Mngt., High Voltage Test Equipment, Electric Vehicles & Others
- Markets: Solar, Test & Measurement, Automotive & Others

Part Description: LI 00-1A XX



Nominal Voltage	Contact QTY	Contact Form	Switch Model
05, 12, 24	1	A	31, 85

Customer Options	Switch Model		Unit
Contact Data	31 (Mercury)	85 (Dry)	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	50	100	W
Switching Voltage (max.) DC or peak AC	500	1,000	V
Switching Current (max.) DC or peak AC	2.0	1.0	A
Carry Current (max.) DC or peak AC	2.0	2.5	A
Contact Resistance (max.) @ 0.5V & 50mA	80	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	2.1	3 – 4.2	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	1.2	1.1	ms
Release Time (max.) Measured with no Coil Excitation	1.0	0.1	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	X	10^{10}	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0,3	0.5	pF

Series Datasheet – LI Reed Relays

www.standexmeder.com

Coil Data		Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
Contact Form	Switch Model					
1A	85	Unit	VDC	Ohm	VDC	mW
		05	200	3.5	0.75	125
		12	680	8.4	1.4	211
		24	2,000	16.8	3.6	288

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

Relay Data		Unit
Dielectric Strength Coil/Contact (min.) according to EN60255-5	7	kVDC
Insulation Resistance Coil/Contact (typ.) Rh<45%, 200V Test Voltage	10 ¹³	Ohm
Capacitance Coil/Contact (typ.) @ 10 kHz	1.2	pF
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-20 to 70	°C
Storage Temperature	-35 to 95	°C
Soldering Temperature (max.) 5 sec. max.	260	°C
Washability	Fully Sealed	

LI Reed Relay




Handling & Assembly Instructions

- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.
- Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

Life Test Data

*Load increase reduces life expectancy of Reed Switches

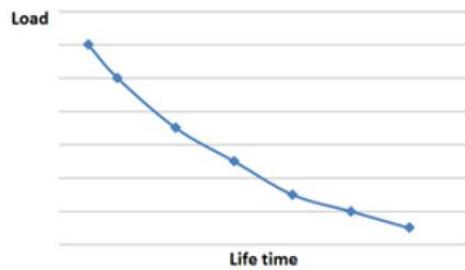

Glossary Contact Form

Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	  
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	





Custom
Engineered
Solutions for
Tomorrow

A Global Leader in the Design, Development, and
Manufacture of Sensor and Magnetic Components

Series Datasheet – LI Reed Relays

www.standexmeder.com

