

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Desco](#)
[35619](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

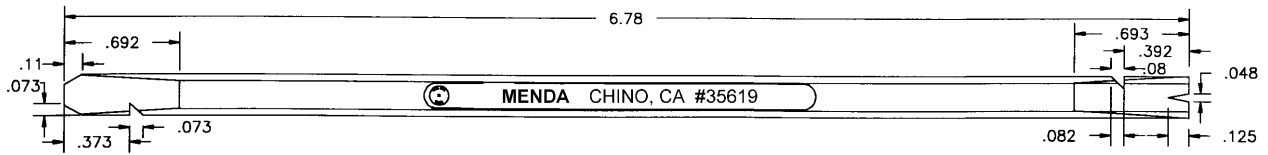

A. MATERIAL: 15% Glass Filled Supertough Nylon

B.  The hygroscopic properties of Nylon will make this tool suitable for use around EOS/ESD sensitive components after a few minutes of handling the tool with bare hands. If used with gloves in a clean environment the tools must be dipped in a topical antistatic solution before use in sensitive areas. Topical

treatment should be repeated at six month intervals. Without exposure to moisture or antistatic treatment Nylon will charge and the charge will not dissipate.

C. Flat "screwdriver" surface for spudging wire leads down flat on circuit boards.

D. Pointed end for forming wire leads or for use as a pointer probe for holding objects for soldering.

Made in U.S.A.

Prober, Soldering Tool, Nylon, Orangestick, Replacement

MENDA

3651 WALNUT AVE., CHINO, CA 91710
PHONE: (909) 627-2453 • FAX: (909) 755-8848
WEBSITE: www.mendapump.com

DRAWING NUMBER
35619

DATE:
07/01