

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Desco](#)
[35622](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

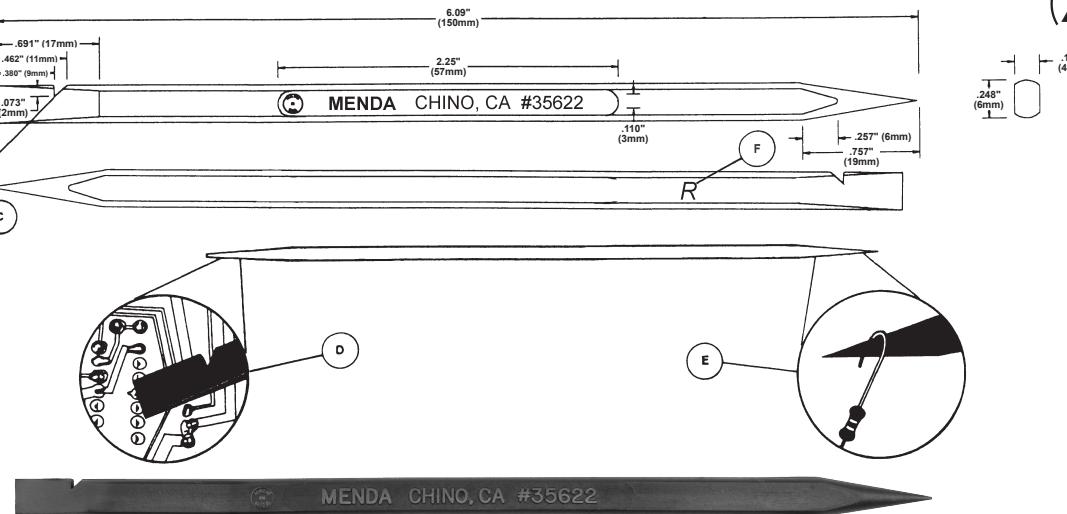

A. MATERIAL: 15% Glass Filled Supertough Nylon, UL94 Rated

B. The hygroscopic (readily accepts moisture) properties of Nylon will make this tool suitable for use around ESD sensitive components after a few minutes of handling the tool with bare hands. If used with gloves in a clean environment the tools must be dipped in a topical antistatic solution before use in sensitive areas. Topical treatment should be repeated at six month intervals. Without exposure to moisture or antistatic treatment, Nylon is in the insulative resistance range and charges will not be removed to ground.

C. Notch for hooking and pulling wires or components.

D. Flat "screwdriver" surface for spudging wire leads down flat on circuit boards.

E. Pointed end for forming wire leads or for use as pointer probe for holding objects for soldering.

F. Date Code (R=2006, S= 2007, T=2008, U=2009, V=2010, W=2011, X=2012, Y=2013, Z=2014)



Melting Point: 450°F (232°C)

Made in the
United States of America

Specifications and procedures subject to change without notice.

PROBER, SOLDERING TOOL, NYLON

MENDA

3651 WALNUT AVE., CHINO, CA 91710
PHONE: (909) 627-2453
WEBSITE: MendaPump.com

DRAWING NUMBER
35622

DATE:
February
2014