

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Pomona Electronics](#)
[3847](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Model 3847
Adapter Hermetic Sealed BNC
Female To Female

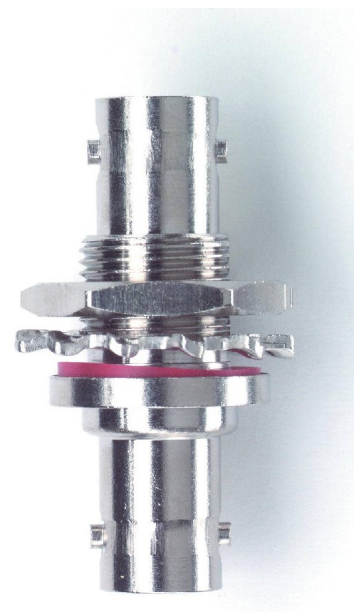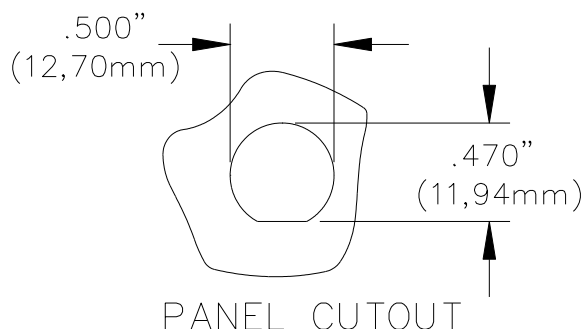

FEATURES:

- ✓ Hermetically sealed: Leakage rate less than 10^{-7} cc/sec of tracer gas at one atmosphere.

MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Nickel Plated Brass

Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 500 Vrms maximum. *For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.*

Operating Temperature: -65°C to +165°C

Nominal Impedance: 50 Ohms

ORDERING INFORMATION:

Model 3847

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com