

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[JKL Components Corporation](#)
[BF20325-24B](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

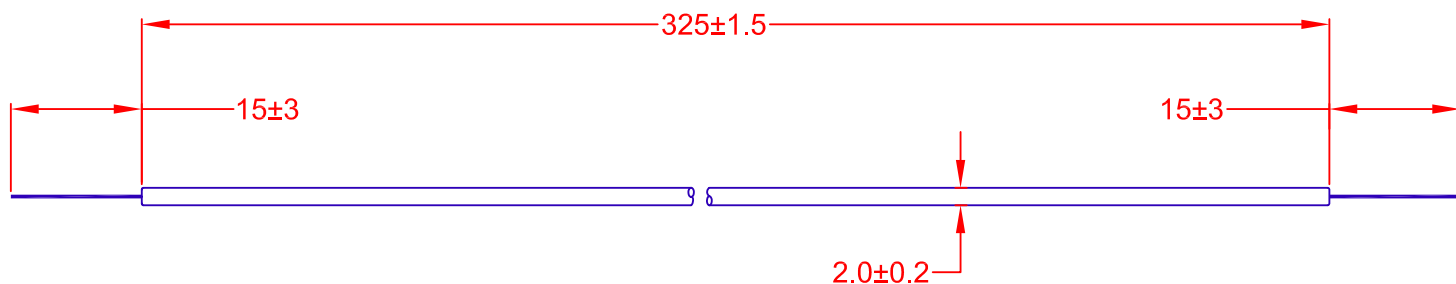

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (Cd/m2)	*RATED LIFE (HRS)
CF20325-24B	8400 Kelvin x = .290 REF. y = .305 REF.	**1830 MAX.	735 @ 5mA	5.0 TYP. 7.0 MAX.	46,000 TYP.	20,000 MIN. 40,000 AVG.

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

**MAY BE HIGHER WHEN MOUNTED IN METAL RAIL AND USING INPUT HARNESS, REF. 2250 Vrms Max. @ 0 C.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0	JKL COMPONENTS CORPORATION				
			DRAWN BY L. WENGSTROM		APPV'D BY DATE J.K. 5/3/05		TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP			
A			CHANGE BRIGHTNESS TO 46,000 TYP.		5/3/05		SIZE A	FSCM NO. 55335	DRAWING NO. CF20325-24B	
			RELEASED		4/15/04		SCALE NONE	RELEASED DATE 4/15/04	REVISION DATE 5/3/05	REV. NO. A
REV. NO.	DESCRIPTION/ECO NUMBER		APPV'D DATE		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SHEET 1 OF 1			