

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Desco](#)
[17151](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

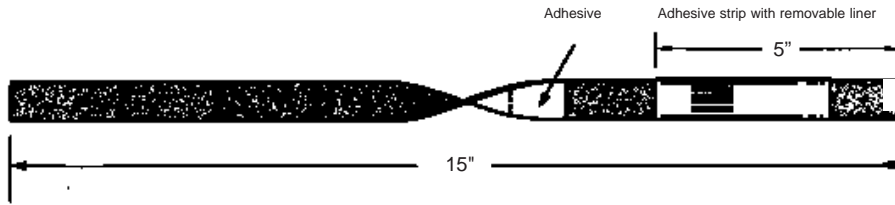

To Install:

1. Remove the shoe and then remove the release paper exposing the adhesive tape from the Heel Grounder assembly.
2. Install the portion of the adhesive tape to the bottom of the heel and up the back of the center of the shoe. " Very important that the bottom of the heel where the adhesive makes contact is clean first and is free of any oils or dirt particles that will inhibit the adhesive tape from securing correctly"
3. Place the **Yellow High visibility** non-adhesive section FLAT between the inside of the shoe (between the sock and shoe) and place your foot back into the show making good contact with the Heel grounder.
4. Repeat the installation process with the other foot.

Features:

- Temporary use only. For use by visitors in ESD protected areas.
- Two heel grounds are recommended for reliable grounding and ESD protection, providing ground when one foot is off the floor.
- Provides a conductive path to a grounded floor surface around shoes (which are typically made of insulated materials). Operator is grounded when foot is in contact with grounded dissipative or conductive flooring.

Note:

Desco recommends the use of foot ground tester item No. 19252, 19253, 98280/98273, or 98280/98254.
 For additional information on the use and maintenance of foot grounders please ask for Technical Bulletins TB-2020, TB-2040, and TB-3000.

Charge Decay	Less than .01 sec.	FTMS-1018, Method 4046
Surface Resistivity	10 ⁶ ohms	ESD S4.1 @ 100V

Meets the requirements of JEDEC-108/9, MIL-HDBK-263A, MIL-STD-1686, DOD-STD-2000.

Caution: The foot grounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

HIGH VISIBILITY "YELLOW" DISPOSABLE HEEL GROUNDER

DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com
 PHONE (909) 627-8178 FAX (909) 627-7449
 DESC0 EAST: 90 HUDSON RD, CANTON, MA 02021-1407
 PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
17151

DATE:
09/05