

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Energizer Battery Company](#)

[EN92](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT DATASHEET




1-800-383-7323 USA/CAN
www.energizer.com

ENERGIZER EN92

AAA



Industry Standard Dimensions

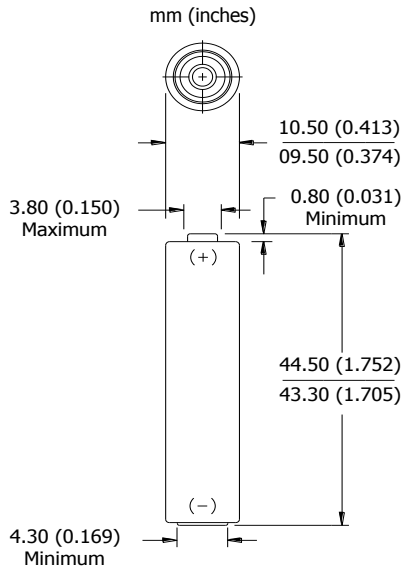


Specifications

NOT INTENDED FOR RETAIL TRADE

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-24A, IEC-LR03
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	11.5 grams (0.4 oz.)
Typical Volume:	3.8 cubic centimeters (0.2 cubic inch)
Jacket:	Plastic Label
Shelf Life:	10 years at 21°C
Terminal:	Flat Contact


Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

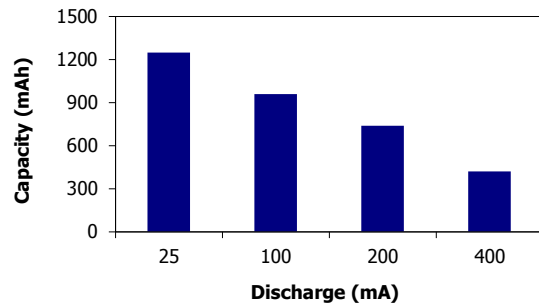


Constant Power Performance

Typical Characteristics (21°C)

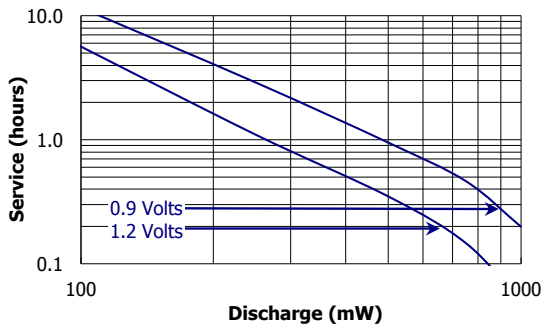

Constant Current Performance

Typical Characteristics (21°C)

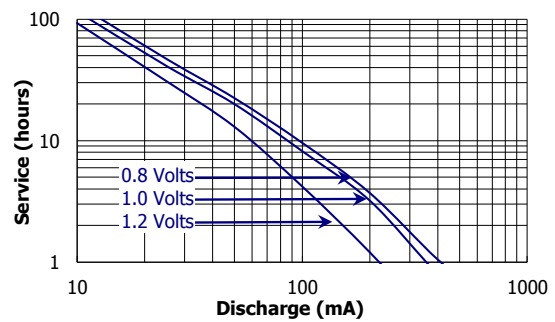

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

PRODUCT DATASHEET




1-800-383-7323 USA/CAN
www.energizer.com

ENERGIZER EN92

AAA


Constant Power Performance

Discharge Characteristics (21°C)

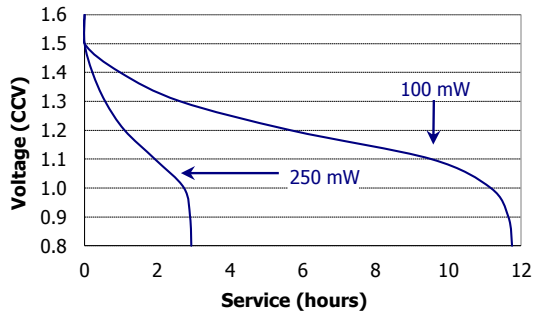


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

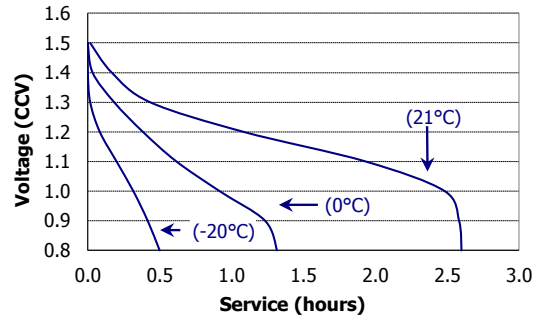


Industry Standard Tests (21°C)

LIGHTING
5.1 ohm LIF

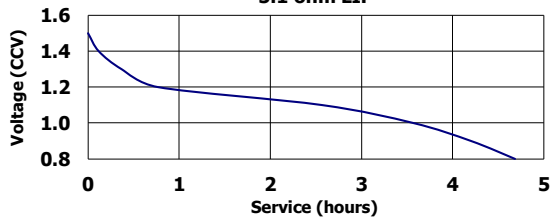


REMOTE

24 ohm 15 sec/min 8 hrs/day

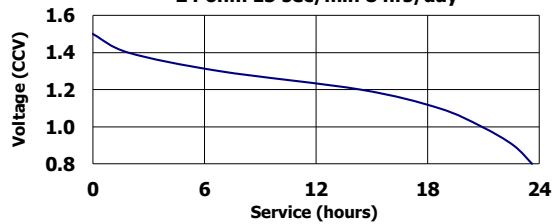


TAPE-GAME-DIGITAL AUDIO
100 mA 1 hr/day

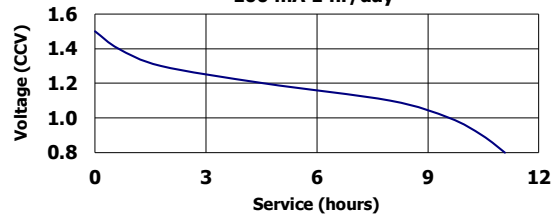

PHOTOFLASH

600 mA 10 sec/min 1 hr/day

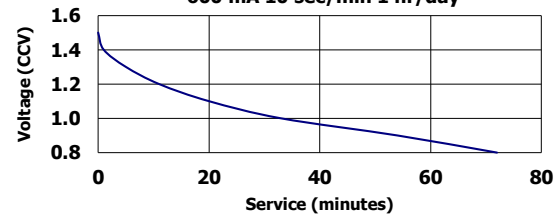

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.