

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Energizer Battery Company](#)  
[L522MJ](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


**PRODUCT DATASHEET**

**ENERGIZER L522MJ**

**9V**



**Industry Standard Dimensions**

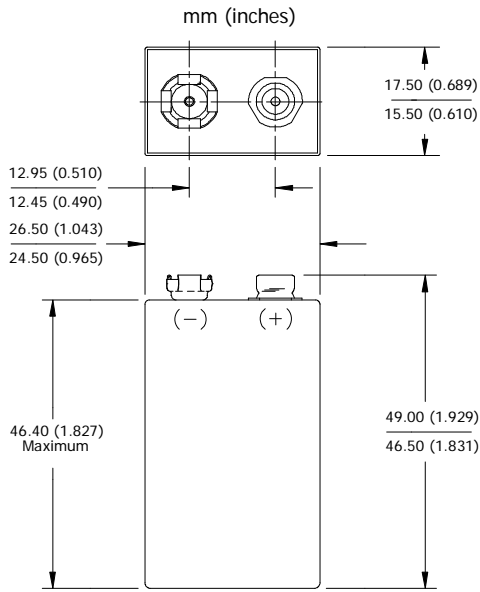



This Battery has Underwriters Laboratories component Recognition

**Specifications**



<b>Classification:</b>	Lithium 9V
<b>Chemical System:</b>	Lithium-Manganese Dioxide (Li/MnO <sub>2</sub> )
<b>Designation:</b>	ANSI-1604LC
<b>Nominal Voltage:</b>	9.0 volts
<b>Operating Temp:</b>	-40°C to 60°C (-40°F to 140°F)
<b>Storage Temp:</b>	-40°C to 60°C (-40°F to 140°F)
<b>Max Discharge :</b>	120 mA continuous *
<b>Typical Weight:</b>	36.4 grams (1.3 oz.)
<b>Typical Volume:</b>	21.4 cubic centimeters (1.3 cubic inch)
<b>Jacket:</b>	Metal
<b>Terminal:</b>	Miniature Snap
<b>Typical Li Content:</b>	1.35 grams (0.048 oz.)
<b>UL Listed:</b>	MH12454
<b>Applications:</b>	This battery best suited for long and short term applications.
<b>Shipping:</b>	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185

\* **Discharging above 120 milliamps (mA) may activate the built-in safety mechanism. This can permanently affect battery performance.**

**Typical Discharge Performance (21°C)**

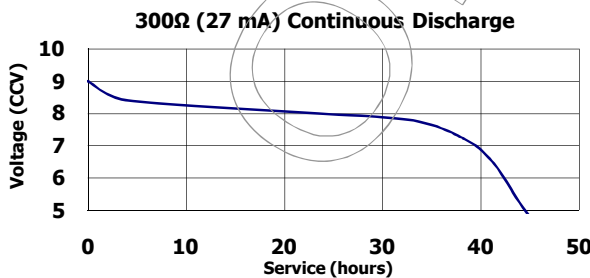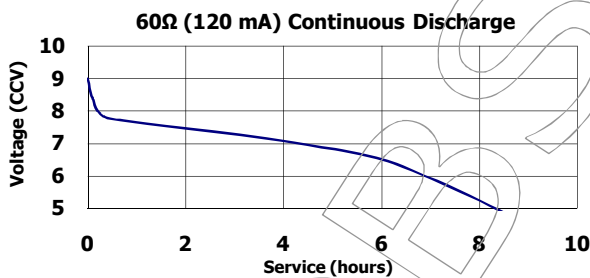

**Milliamp-Hours Performance (21°C)**

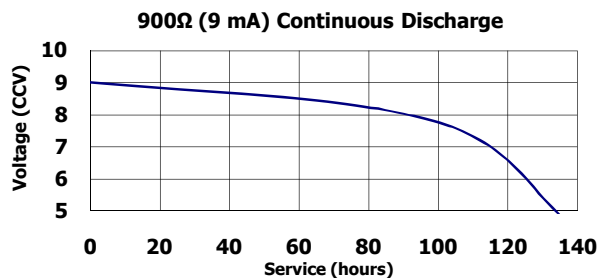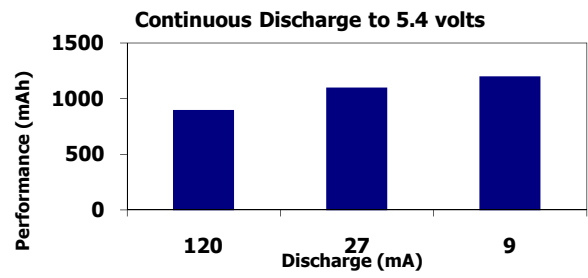

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.