

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R1966ABLKBLKIS](#)


For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET OF

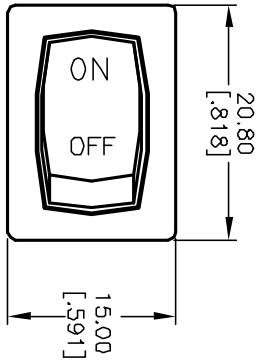


PANEL THICKNESS	X
0.75-1.25	[0.030-0.049] 19.2 [0.756]
1.25-2.0	[0.049-0.079] 19.4 [0.764]
2.0-3.0	[0.079-0.118] 19.8 [0.780]

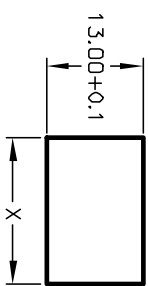

PANEL CUTOUT

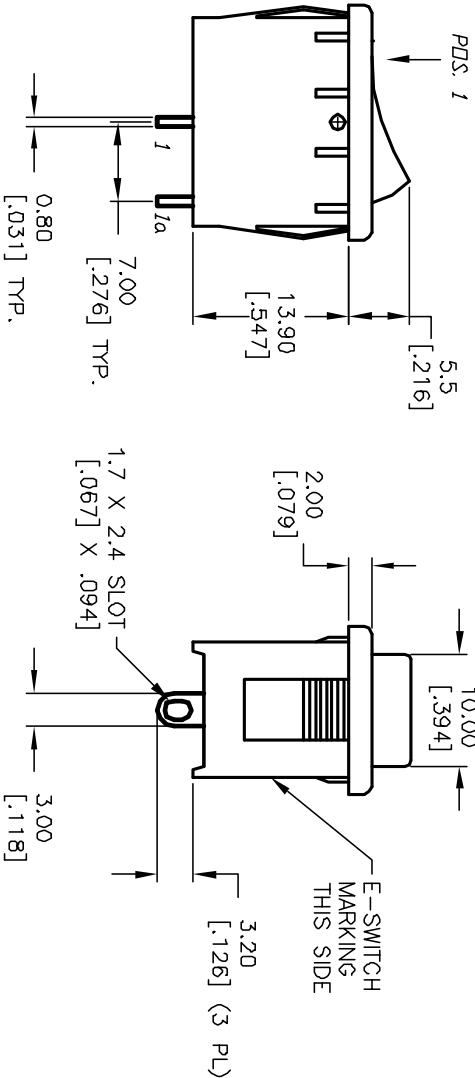

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-1a	OPEN



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY.
4. RATING: 15A @ 125VAC OR 6A @ 250VAC
5. MECHANICAL LIFE: 15,000 cycles
6. ELECTRICAL LIFE: 10,000 cycles
7. INSULATION RESISTANCE: >1000 Mega Ω
8. CONTACT RESISTANCE: <20 Mega Ω
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

E-SWITCH®

B	11664	REVISED PART DESCRIPTION	9/19/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
 IS PROPRIETARY TO E-SWITCH AND IS
 NOT TO BE COPIED OR TRANSMITTED

TITLE				
SCALE	DATE	DR	DWG	REV
1.5:1	12/10/97	MM	M301209	B

R1966A BLK BLK I S