

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[2443-K-48](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

**Model 2443K
 Patch Cord, Double Banana Plug To
 Miniature Double Banana Plug**

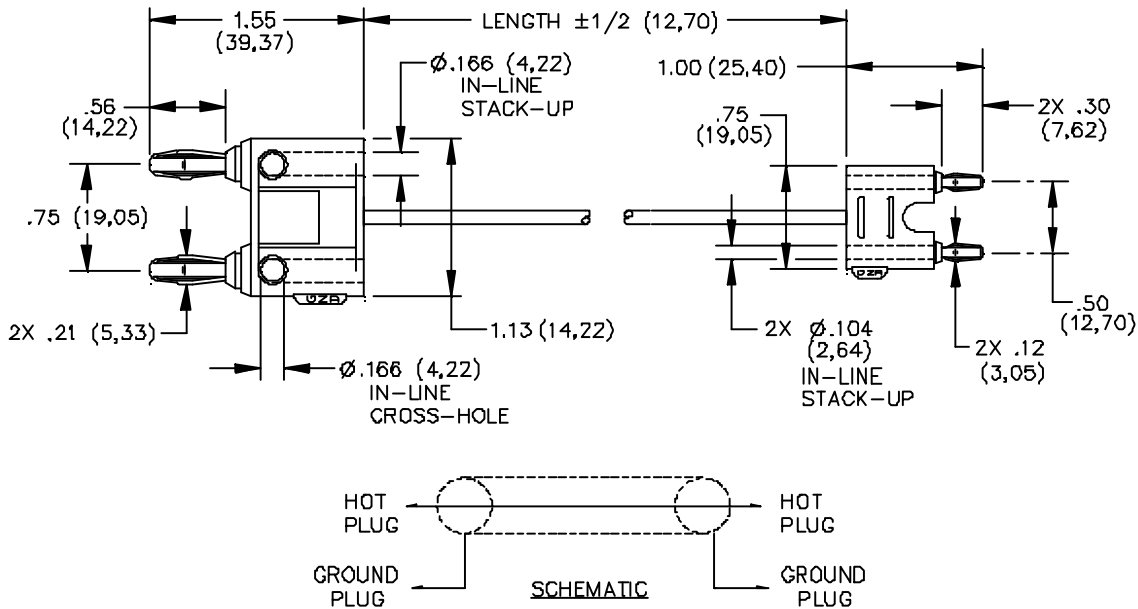

1/2 Hard.

MATERIALS:

Connector: 1st End - Double Banana Plug
 Spring: Beryllium Copper per QQ-C-533, Alloy C172, Cond. HT.
 Plug Body: Brass per QQ-B-626, Alloy 360, 1/2 hard.
 Finish: Nickel plated per QQ-N-290 Class 2, 200/300 microinches.
 Insulation: Polypropylene, molded to banana plug bodies and cable. Color matches color of cable.
 Marking: "POMONA ELECTRONICS, CALIF."
 Cable Type: RG174/U, .100" O.D.

Cap. Pf./ft.: 30.8
 Nominal Impedance: 50 Ohms
 Connector: 2nd End - Miniature Double Banana Plug
 Spring - Beryllium Copper per QQ-C-533, Berylco 25, Cond. H.T.
 Plug Body - Brass per QQ-B-626, Alloy 360,

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class 1, 200/300 microinches.
 Insulation: Same as double banana plug.
 Marking: "POMONA ELECTRONICS CALIF."

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.
 Operating Voltage: 1000 VRMS

ORDERING INFORMATION: Model 2443-K-XX

XX = Length in inches. Std. Lengths: 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm).

Additional lengths can be quoted upon request.
 Ordering Example: 2443-K-36, Cable length will be 36" (9,44 mm) long.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA