# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 3744A-0


For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>





### Technical Data Sheet

## Model 3744A Spade Lug to Banana Jack

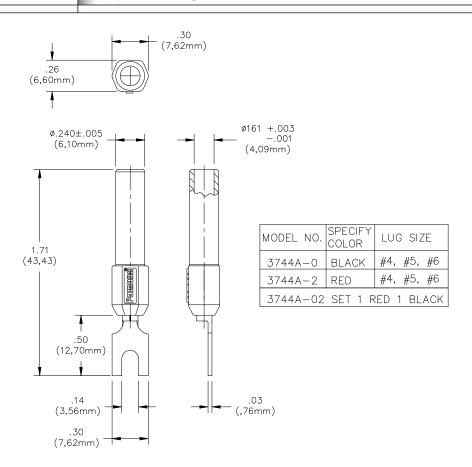

#### **MATERIALS:**

1<sup>st</sup> End: Banana Jack

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per Q-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene (Fire Retardant) molded to Banana Jack Body. Color: See Tab Block.

Marking: "POMONA" 2<sup>nd</sup> End: Spade Lug

Material: Copper.

Finish: Electro-tin plated.

#### **RATINGS:**

Operating Temperature: +50° C (+122° F) Max. Operating Voltage: 5000 VDC Current: 15 Amperes

#### ORDERING INFORMATION:

See table above

**USA:** Sales: 800-490-2361

Technical Support: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>

Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.