

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[4163-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 4163 Insulated Triple Banana Jack Polarized

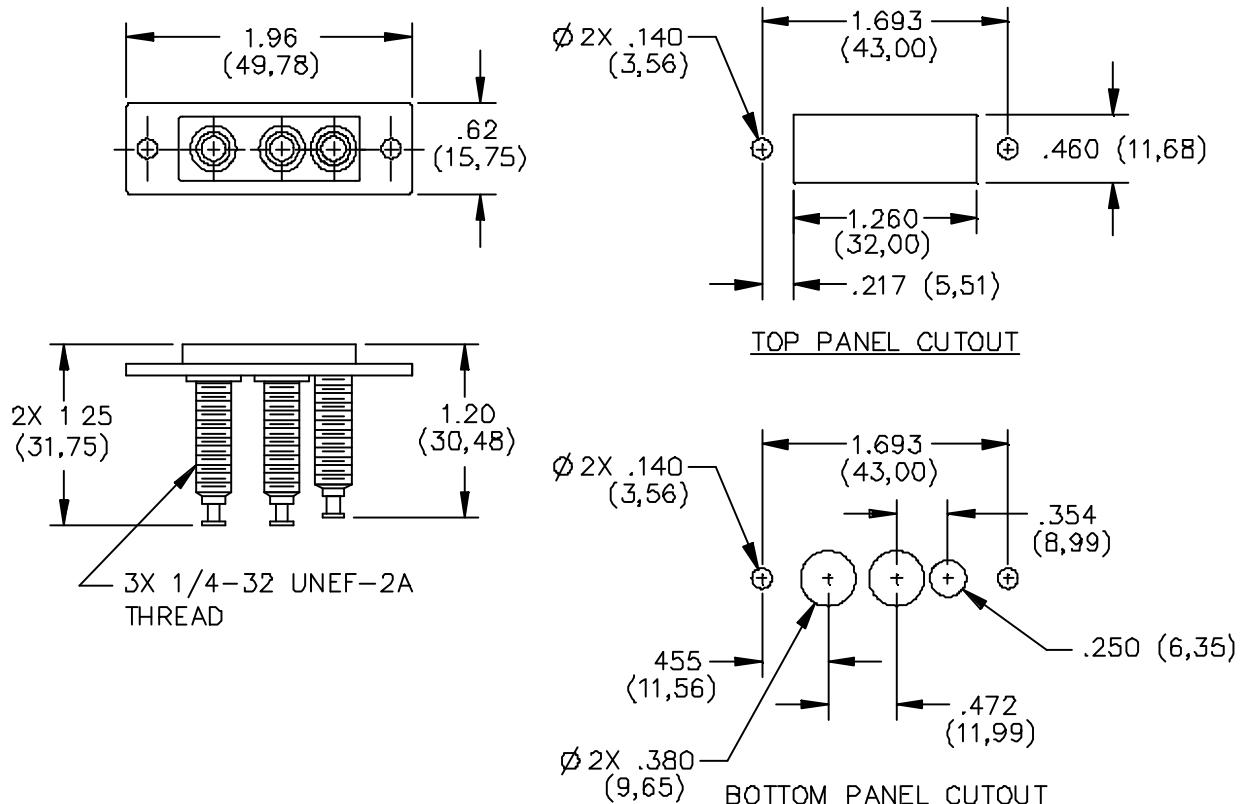

FEATURES:

- Mounts in panels at 17.78 (.70) thickness
- Accepts standard banana plugs up to .80 long.
- Initial connection made with ground receptacle.

MATERIALS:

Banana Jack: Bright Tin Plated Brass

Marking: "Pomona 4163"

Mounting Screws: Steel

Insulation: Polycarbonate

Lockwasher and Hex Nuts: Steel

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 2500 WVDC Max.

Operating Temperature: +115°C (+239°F) Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 4163-*

*=Color, -0 Black

Ordering Example: 4163-0 Color is Black.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA