

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4277-C-24](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 4277**  
**BNC (Female) Cable With**  
**Molded Strain Relief**

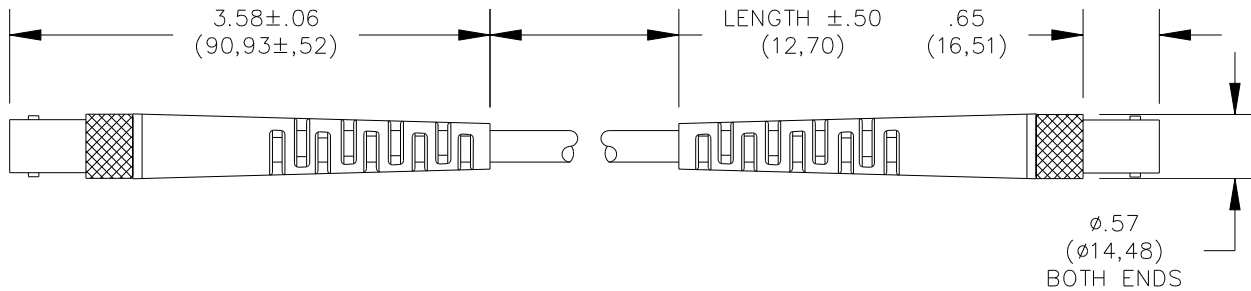

**FEATURES:**

- BNC center contacts are gold plated Beryllium Copper for optimum electrical connection.
- Molded Strain Relief is tightly bonded to the cable jacket to ensure a long cable life.
- Connector dielectric is PTFE and the BNC shell is tarnish resistant for superior performance.

**MATERIALS:**

BNC (Female): Body: Brass, Nickel Plated  
 Center Pin: Beryllium Copper, Gold Plated  
 Impedance: 50 Ohms  
 Strain Relief: PVC Molded to Cable, Color: Black  
 Cable: RG58C/U, Impedance: 50 Ohms Nominal, O.D. .195" (5,0 mm), Color: Black,  
 Capacitance per Ft.: 30.8 pF/Ft.  
 Marking: "POMONA", "4277-C-XX"

**RATINGS:**

Operating Voltage: Shield/Earth: 30VAC/60VDC Max.  
 Inner Conductor/Shield: 500VRMS Max.  
 Operating Temperature: 50°C (+122°F) Max.

**ORDERING INFORMATION:** Model 4277-C-XX

XX = Length in Inches, Std. Lengths: 24" (61 cm), 48" (122 cm)

Custom lengths can be quoted upon request.

Ordering Example: 4277-C-48 is a Model 4277 with the length of 48" excluding the BNC connectors and strain relief dimensions.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies.

Made in USA