

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[4813-BB-24](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 4813
Cable Assembly, Microwave Right
Angle SMA (Male) Both Ends

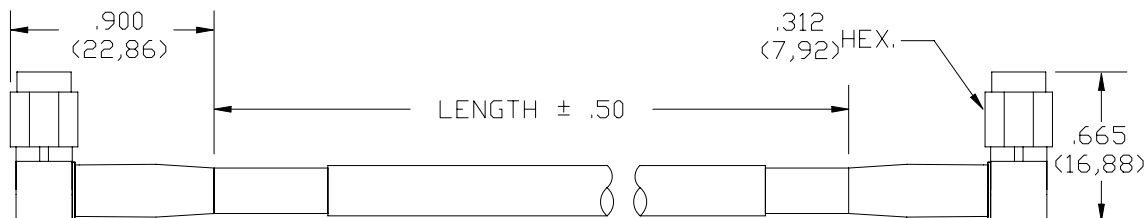

	RG 316/U (Tinted Brown)
Model	4813-BB-XX
Capacitance pf/ft	29.0
Nominal Impedance	50
Temp	+200°C. (392°F.) MAX.
Loss	.56 db/ft @ 3 GHz MAX.

MATERIALS:

Conn: 1st end – Right angle, SMA male.

Body and Fittings: Stainless steel per QQ-S-764, Type 303, Cond. A.

Contact: Brass, per QQ-B-626, Alloy 360, .5 hard.

Dielectric: Teflon, per L-P-403.

Gasket & Seals: Silicon Rubber per ZZ-R-765, Class 11, Grade 65-75.

Finish: Body & Fittings, Nickel plated per QQ-N-290, (.0001 min.)

Contact: Gold plated, per requirements of MIL-C-39012.

Cable: See table above: Marking: “ POMONA 4813-X-XX “ (see note 1).

Conn: 2nd end – Same as first.

RATINGS: See table above

Operating Voltage: 335 VRMS Max.

ORDERING INFORMATION: Model 4813-BB-XX

XX = Cable lengths, Standard Lengths: 24” (610).

Additional lengths can be quoted upon request.

Ordering Example: 4813-BB-24 Indicates 24” in length

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA