

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[4964-SS-12](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 4964
Cable Assembly
BNC (Male) Each End, Low Noise

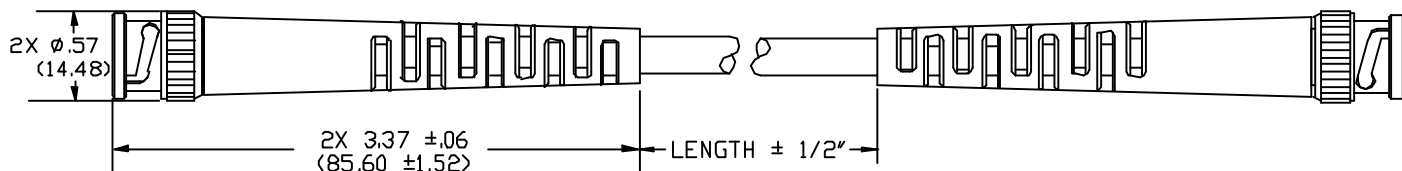

FEATURES:

- Uses a special low-triboelectric cable which has noise attenuating layers surrounding the center conductor.
- The cable is ideal for low power, low frequency measurements.

MATERIALS:

Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

Strain Relief: PVC molded directly to cable and connectors

Cable: 22 AWG, stranding 7 x 30 t.c., PVC insulated, 4.95 (.195) O.D.

Marking: "Pomona 4964-SS"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +50°C. (+122°F.) Max.

Nominal Impedance: 50 Ohms

Recommended Frequency Range: DC to 10KHz

ORDERING INFORMATION: Model 4964-SS-*

*- Standard Lengths: 12, 24, 26, 48, 60, 96, 120, 144, 180, 240, 300, 360 – Lengths other than those specified are available on special request.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA