

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pomona Electronics](#)


[5421-48-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 5421 Minipincer® Test Clip To Stacking Banana Plug

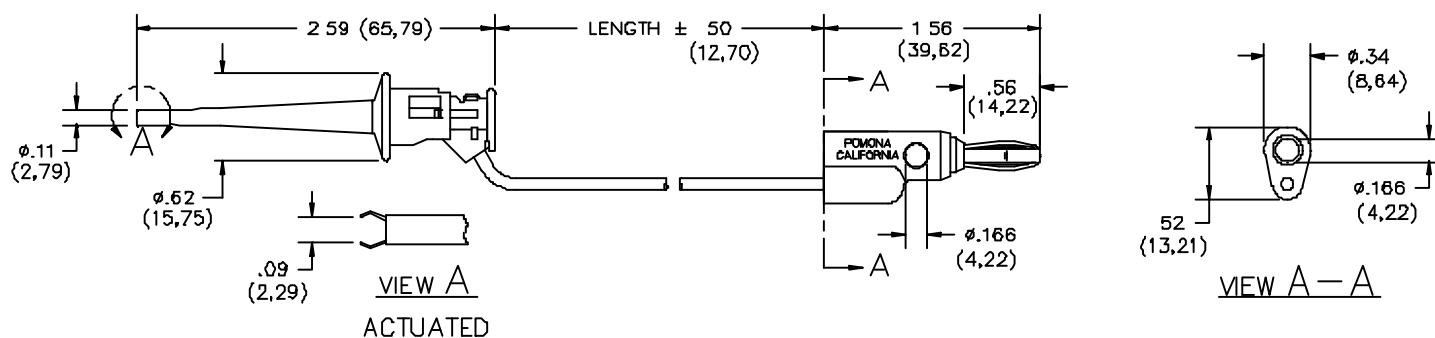

FEATURES:

- Ideal for temporary connection between terminals, wire wrap posts and test equipment.
- Banana Plug is vertically stackable and cross stackable.
- Banana Plug will mate to Model #5259, 1581 or any standard Banana Jack.

MATERIALS:

Connector: 1st End – Minipincer Test Clip

Material: Selectively gold plated Beryllium Copper contact.

Insulation: Nylon

Wire: 20 AWG, 41 x 36 t.c., PVC insulated, 2.2 (.087) O.D.

Marking: "POMONA 5421-XX-"

Connector: 2nd End – Stacking Banana Plug

Material: Brass Body, Beryllium Copper spring, nickel plated.

Insulation: Polypropylene

RATINGS:

Operating Temperature.: +55°C. (+ 131°F.) Max.

Voltage: Hand-held testing: 30 VAC/60 VDC Max.

Hands free testing in controlled voltage environments: 300 WVDC

Current: 5 Amperes

ORDERING INFORMATION: Model 5421-XX-*

XX = Cable Lengths, Standard Lengths: 12" (305), 18" (457), 24" (610) 36" (914), 48" (1219) & 60" (1524).

Additional lengths can be quoted upon request.

*= Color, -0 Black, -2 Red

Ordering Example: 5421-60-2 Indicates 60" in length, Color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

C:\Laura Goldberg\FlukeDataSheet\5421_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS **90640** (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 1