

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[5423-C-24](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 5423  
 BNC Male With Molded Strain Relief  
 To Minipincer® Test Clips**

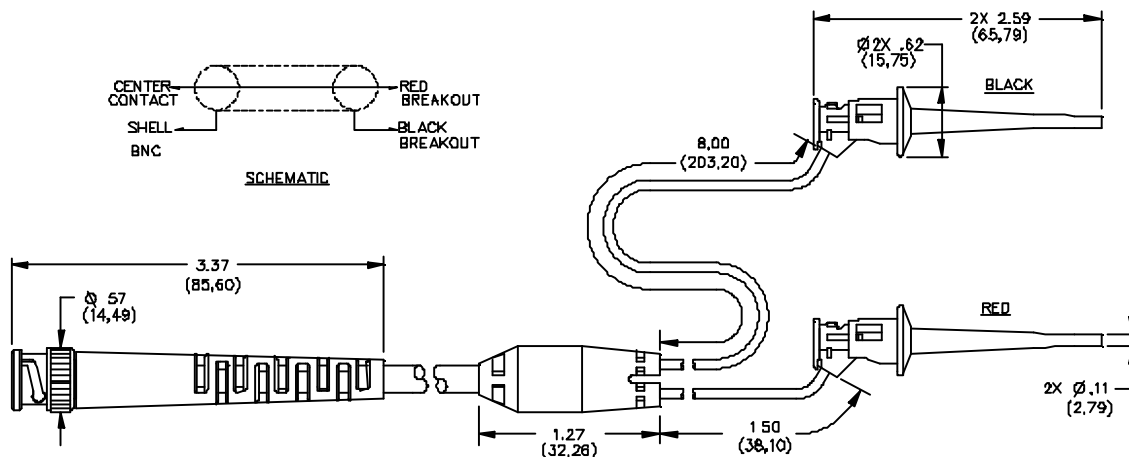

**FEATURES:**

- Convert a BNC Female receptacle into Minipincer® Test Clips

**MATERIALS:**

Conn: 1<sup>st</sup> End - Minipincer® Test Clips. Selectively gold plated Beryllium Copper contact.

Insulation: Nylon

Color: One Black and one Red

Cable: RG58C/U, 5.0 (.195) O.D.; Y-Mold insulation, PVC, Black

Conn: 2<sup>nd</sup> End – Crimp BNC Male – Brass body, tarnish resistant plated.

Center Contact: Brass, gold plated

Boot: PVC, Black

Marking: “POMONA 5423”

**RATINGS:**

Operating Temperature: +50° (+122°F) Max.

Operating Voltage: 300 VRMS Max.

Current: 5 Amperes

**ORDERING INFORMATION:** Model 5423-C-XX

XX= Cable Length, Standard Length: 18” (457), 24” (610), 36” (914), 48” (1219), 60” (1542)

Ordering Example: 5423-C-60 indicates 60” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA