

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[5933-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 5933
Insulated 4 MM Banana Jack

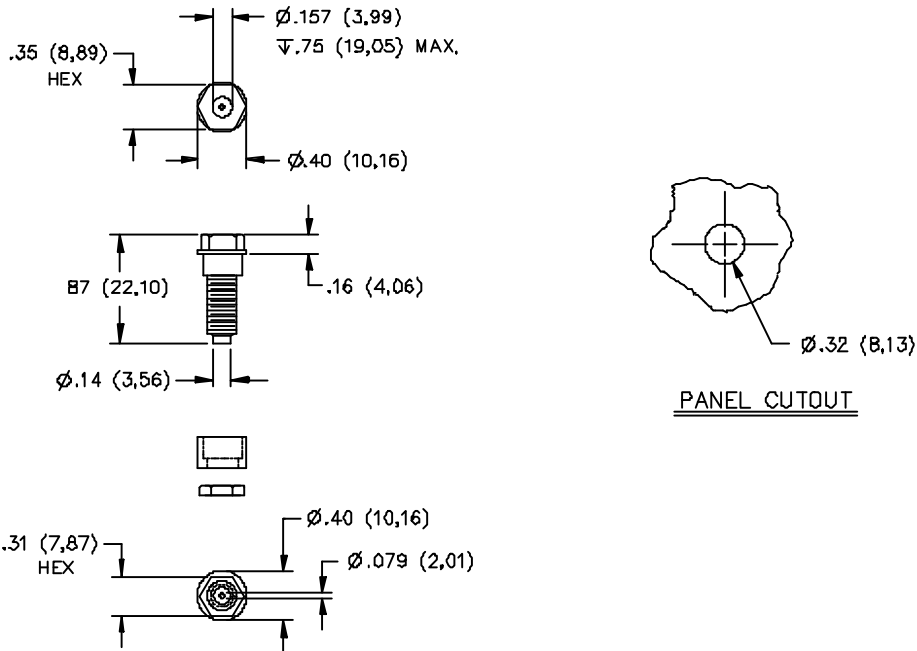

Recommended Maximum Panel Thickness: .28" (7,0mm)

FEATURES:

- Ideal for panel mount applications.
- .079" (2mm) opening at bottom of jack enables solder type wire attachment.

MATERIALS:

Insulator & Collars: Nylon, Color Per Part Number
 Banana Jack & Nut: Brass, Nickel Plated

RATINGS:

Operating Voltage: 750 VRMS Max.
 Current: 20 Amperes Max.

ORDERING INFORMATION: Model 5933-*

* = Color Code, Standard Colors: -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White

Sold in packages of ten per color.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA