

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 6329-96

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>


### **Distributor of Pomona Electronics: Excellent Integrated System Limited**


Datasheet of 6329-96 - PLUG DUAL BANTAM/2 ALLIGS 96"

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

# Pomona®

## Model 6329 Dual Bantam (Miniature Phone Plug) To 2 Alligator Clips

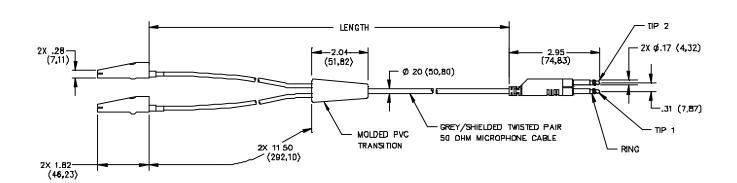



#### **FEATURES:**

- Shielded cable to reduce noise.
- Wired for long pins looking out to field
- Dual Bantam Plugs are molded to the cable for optimum durability

#### **MATERIALS:**

Plug – Dual Bantam, nickel plated brass Cable – 4 Conductor shielded twisted pair

#### **RATINGS:**

Operating Temperature: -20°C to +80°C Operating Voltage: 300 VRMS Max. Current: 3.36 Amperes @ 25°C Max.

Nominal capacitance conductor to shield: 720pf

Nominal capacitance between conductors pairs: 420pf

#### **ORDERING INFORMATION:** Model 6329-96

Standard Length – 96 Inches (2134 mm)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02^{\circ}$  (,51 mm),  $.xxx = \pm .005^{\circ}$  (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS
C:\Laura Goldberg\FlukeDataSheet\d6329\_1\_01.doc

Pomona*ACCESS* **90702** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

Page 1 of 1