

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)

[MS22 22103](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	23.0	± max
T:	10.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	4.0	± max
B:	9.20	± nom
C:	7.30	± nom

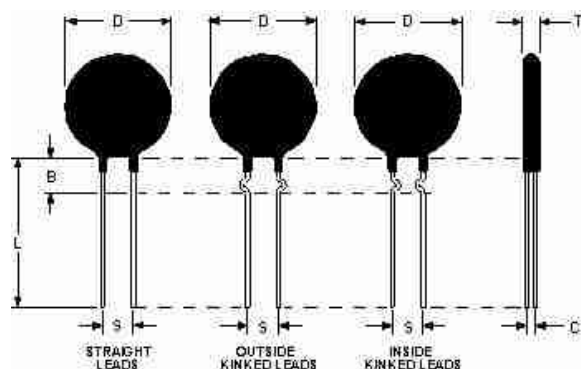

Electrical Specifications

Resistance:	220.0 Ω	± 25 %
Max Steady State Current upto 65°C:	3.50	A
Max Rec. Energy Rating:	75	J
Actual Failure Instantaneous Energy:	175	J
Maximum Capacitance @ 120 VAC:	5,100	µf
Maximum Capacitance @ 240 VAC:	1,302	µf
Maximum Capacitance @ 440 VAC:	301	µf
Maximum Capacitance @ 680 VAC:	150	µf
Resistance @ 100% Max Current:	1.40	Ω
Resistance @ 50% Max Current:	2.75	Ω
Body Temperature at 100% Max Current:	144.00	°c
Dissipation Constant:	45.4	mw/°c
Thermal Time Constant:	114	Sec.
Material Type (for Beta and Curve):	L	

MS22 22103	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a