

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)  
[SL22 2R508](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



ISO9001:2008 Certified

### Mechanical Specifications (mm)

D:	22.0	± max
T:	5.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.22	± nom
C:	3.65	± nom

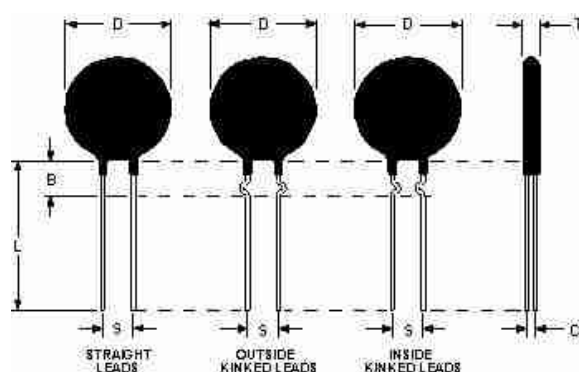

### Electrical Specifications

Resistance:	2.5	Ω	± 20 %
Max Steady State Current upto 65°C:	8.00	A	
Max Rec. Energy Rating:	90	J	
Actual Failure Instantaneous Energy:	200	J	
Maximum Capacitance @ 120 VAC:	6,251	µf	
Maximum Capacitance @ 240 VAC:	1,562	µf	
Resistance @ 100% Max Current:	0.06	Ω	
Resistance @ 50% Max Current:	0.14	Ω	
Body Temperature at 100% Max Current:	162.00	°C	
Dissipation Constant:	32.4	mw/°C	
Thermal Time Constant:	94	Sec.	
Material Type (for Beta and Curve):			

### SL22 2R508

Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a