

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)

[SL22 60003](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)




File: E209153



ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	22.0	± max
T:	7.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.35	± nom
C:	4.33	± nom

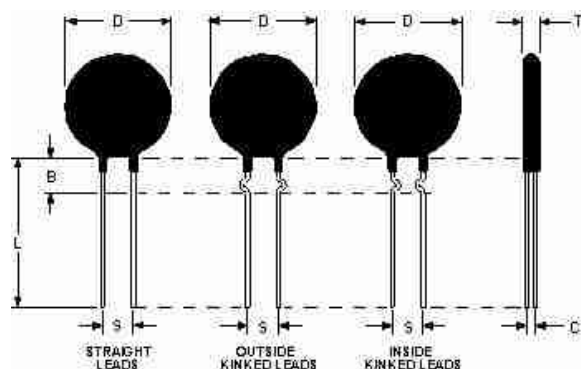

**Electrical Specifications**

Resistance:	60.0 Ω	± 25 %
Max Steady State Current upto 65°C:	3.00	A
Max Rec. Energy Rating:	72	J
Actual Failure Instantaneous Energy:	150	J
Maximum Capacitance @ 120 VAC:	4,800	µf
Maximum Capacitance @ 240 VAC:	1,200	µf
Resistance @ 100% Max Current:	0.41	Ω
Resistance @ 50% Max Current:	1.28	Ω
Body Temperature at 100% Max Current:	166.00	°c
Dissipation Constant:	32.4	mw/°c
Thermal Time Constant:	112	Sec.
Material Type (for Beta and Curve):	I	

<b>SL22 60003</b>	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a