

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[I/O Interconnect](#)

[GLF-464-074-522-D](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

A	B	C	D	E	F	G	H		
THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.					DWG. NO. XX4-522-D	ZONE REV. C D	DESCRIPTION ECN C285 ADD NOTE & CHANGE P/N TO ROHS COMPLIANT PER ECN D829	DATE 08/20/01 04/21/05	APPROVED K.C. M.G.

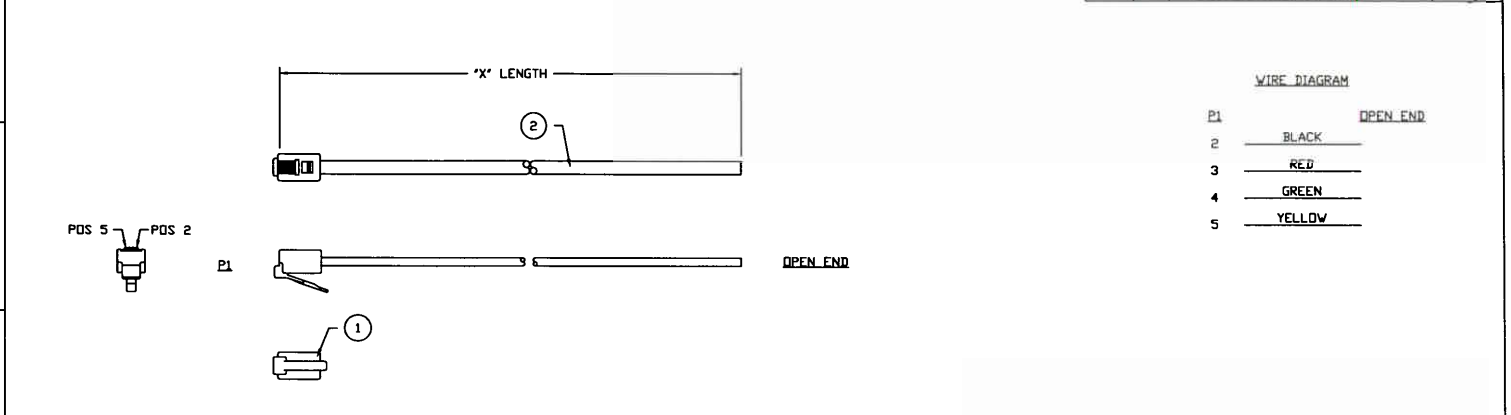

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.
 - MARK OUTSIDE SHIPPING BOX WITH CUSTOMER PART NUMBER.
 - PLACE BAR CODE LABEL ON THE OUTSIDE OF EACH SHIPPING BOX LABEL DETAIL SEE DWG 090-990-001.
 - ALL METRICALL SHOULD BE ROHS COMPLIANT.

ITEM	QTY	MFG.	IDI PART NO.	DESCRIPTION
2	"X"	IDI	GLF-120-410-020	MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 4 CONDUCTOR, UNSHIELDED, WHITE PVC. ROHS COMPLIANT.
1	1 PC	IDI	GLF-325-641-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 4 CONDUCTOR, 50u" Au, FLAT TYPE EXIT. ROHS COMPLIANT.

CABLE ASSEMBLY PARTS LIST

T.B.D.	GLF-464-254-522-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
T.B.D.	GLF-464-144-522-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
H3641-07-ND	GLF-464-074-522-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER DIGI-KEY	PART NUMBER I/O INTERCONNECT	LENGTH "X"

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR. BY: JERRY BUN
DR. CHECKED: JAVIER
REV. 3

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 (6.35)

TITLE: 6P4C MODULAR TO OPEN END, WHITE, CABLE ASSEMBLY
P/N: H3641-XX-ND

PART NO.: GLF-464-XX4-522-D
DWG NO.: GLF-464-XX4-522-D

CUSTOMER: DIGI-KEY

SCALE: NONE

SHEET: 1 OF 1