# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC) 1N4448X-TP

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

### 1N4448X

### **Features**

- Fast Switching Speed
- For General Purpose Switching Applications
- Surface Mount Package Ideally Suited for Automatic Insertion
- Marking Code: T5
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant("P" Suffix designates RoHS Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"


### **Maxim um Ratings**

Symbol	Rating	Rating	Unit
$V_{RM}$	Non-Repetitive Peak Reverse Voltage	100	V
$egin{array}{c} V_{RRM} \ V_{RWM} \ V_{R} \end{array}$	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	75	V
I <sub>FM</sub>	Forward Continuous Current	500	mA
Io	Average Rectified Output Current	250	mA
I <sub>FSM</sub>	Peak Forward Surge Current @1.0 µ s @1.0s	4.0 2.0	А
R⊕JA	Thermal Resistance Junction to Ambient	625	°C/W
$P_{D}$	Power dissipation	150	mW
T <sub>J</sub> ,T <sub>STG</sub>	Operating and Storage Junction Temperature	-65 to +150	$^{\circ}\!\mathbb{C}$

#### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Test Conditions
$V_{(BR)}$	Reverse Breakdown Voltage	75V		I <sub>R</sub> =10 μ A
I <sub>R</sub>	Reverse Voltage Leakage Current		2.5 μ A 25nA	$V_R=75V$ $V_R=20V$
$V_{F}$	Forward Voltage	0.62V  	0.72V 0.855 V 1.0V 1.25V	I <sub>F</sub> =5mA I <sub>F</sub> =10mA I <sub>F</sub> =100mA I <sub>F</sub> =150mA
Ст	Total Capacitance		4.0pF	V <sub>R</sub> =0V, f=1MHZ
t <sub>rr</sub>	Reverse Recovery Time		4.0ns	$I_R=I_F=10$ mA, $R_L=100$ $\Omega$ , Rec. to 1.0mA

### 150mW Switching Diodes



	DIMENSIONS					
	INCHES MM					
DIM	MIN	MAX	MIN	MAX	NOTE	
Α	.059	.067	1.50	1.70		
В	.043	.051	1.10	1.30		
С	.030	.033	0.75	0.85		
D	.001	.003	0.01	0.07		
Е	.010	.014	0.25	0.35		
F	.003	.006	0.08	0.15		
G	.020	.028	0.50	0.70		
Н	.020	.031	0.51	0.77		

MMM mccsemi com




Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

### 1N4448X




#### **Micro Commercial Components**

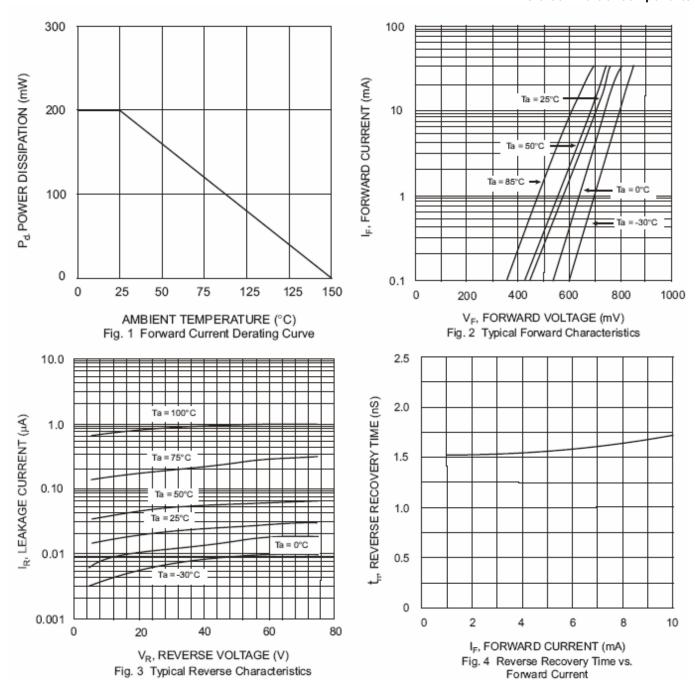

#### Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

## 1N4448X



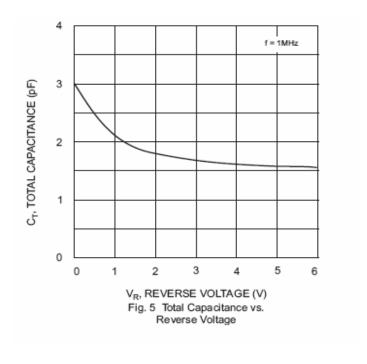

# Distributor of Micro Commercial Components (MCC): Excellent Integrated System Limite Datasheet of 1N4448X-TP - DIODE GEN PURP 75V 250MA SOD523

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



**Micro Commercial Components** 

#### Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel: 8Kpcs/Reel	

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

0042/04/0