

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[EDAC Inc.](#)
[B57-050-220-202](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

EDAC

SERIES B57



Example Part Number B57 - 0 50 - 2 20 - 2 0 2

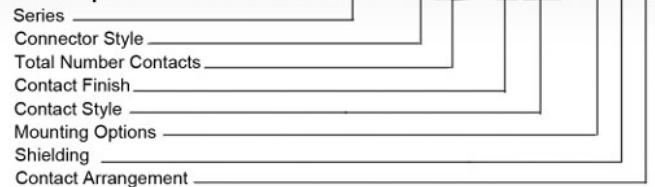

FEATURES

Can be used with 0.062 (1.57), 0.093 (2.36) or 0.125 (3.18) board thickness

Available in 50 and 64 positions

Variety of mounting options available

Intermateable with comparable series connectors

Applications include data control systems, telecom interconnect and electronic instrumentation

SPECIFICATIONS

Insulator Material: glass filled thermoplastic 94V-0
 Colour: Blue

Contact: copper alloy, phosphor bronze (press fit)

Contact Plating: gold plated on contact area, tin on tail over nickel

Shell Material: Nickel-plated steel

Current Rating: 5 AC/DC amps continuous. Is not "hot swappable"

Dielectric Withstanding Voltage: 1200 VAC rms

Insulation Resistance: 1000 megohms minimum at 500 V DC operating voltage 250 VAC

Contact Resistance: 30 milliohms maximum

Operating Temperature: -55 to +105 degrees C

Series B57

Connector Style

0 Receptacle
 1 Plug

Total Number Contacts

50 or 64

Contact Finish

2 Gold Flash, gold plated (2u" min. thickness)
 5 15u" Gold
 6 30u" Gold

Contact Style

20 Vertical Press Fit
 21 Vertical PCB
 29 Flat Cable Termination
 60 Right Angle PCB (.187 tail length)
 61 Right Angle PCB (.100 tail length)
 62 Right Angle PCB (.125 tail length)

Mounting Options

A 4-40 Standoff on position 1 and J-hook on position 25
 2 4-40 Threaded insert / .120 dia. Hole
 3 4-40 Threaded insert / 4-40 threaded Hole
 4 .120 dia. Hole / .120 dia. Hole
 5 4-40 Threaded insert / boardlocks
 6 4-40 Threaded insert / boardlocks / latch
 7 .120 dia Insert / 4-40 threaded Hole
 8 4-40 Hex standoff / boardlocks
(the above holes panel mount first)

Shielding

0 Metal Shell
 1 All Plastic

Contact Arrangement

1 Latch
 2 Two Rows of Contacts