

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay/Siliconix](#)
[IRFPS30N60KPBF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

Power MOSFET

PRODUCT SUMMARY		
V _{DS} (V)	600	
R _{DS(on)} (Ω)	V _{GS} = 10 V	0.16
Q _g (Max.) (nC)	220	
Q _{gs} (nC)	64	
Q _{gd} (nC)	110	
Configuration	Single	

FEATURES



- Low Gate Charge Q_g Results in Simple Drive Requirement
- Improved Gate, Avalanche and Dynamic dV/dt Ruggedness
- Fully Characterized Capacitance and Avalanche Voltage and Current
- Lead (Pb)-free Available



RoHS*
COMPLIANT

APPLICATIONS

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply
- High Speed Power Switching



N-Channel MOSFET

ORDERING INFORMATION	
Package	Super-247™
Lead (Pb)-free	IRFPS30N60KPbF
	SiHFPS30N60K-E3
SnPb	IRFPS30N60K
	SiHFPS30N60K

ABSOLUTE MAXIMUM RATINGS T _C = 25 °C, unless otherwise noted			
PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V _{DS}	600	V
Gate-Source Voltage	V _{GS}	± 30	
Continuous Drain Current	V _{GS} at 10 V	T _C = 25 °C	30
		T _C = 100 °C	19
Pulsed Drain Current ^a	I _{DM}	120	A
Linear Derating Factor		3.6	W/°C
Single Pulse Avalanche Energy ^b	E _{AS}	520	mJ
Repetitive Avalanche Current ^a	I _{AR}	30	A
Repetitive Avalanche Energy ^a	E _{AR}	45	mJ
Maximum Power Dissipation	T _C = 25 °C	P _D	450
Peak Diode Recovery dV/dt ^c	dV/dt	13	V/ns
Operating Junction and Storage Temperature Range	T _J , T _{stg}	- 55 to + 150	°C
Soldering Recommendations (Peak Temperature)	for 10 s	300 ^d	

Notes

- Repetitive rating; pulse width limited by maximum junction temperature.
- Starting T_J = 25 °C, L = 1.1 mH, R_G = 25 Ω, I_{AS} = 30 A.
- I_{SD} ≤ 30 A, dI/dt ≤ 630 A/μs, V_{DD} ≤ V_{DS}, T_J ≤ 150 °C.
- 1.6 mm from case.

* Pb containing terminations are not RoHS compliant, exemptions may apply

IRFPS30N60K, SiHFPS30N60K


Vishay Siliconix



THERMAL RESISTANCE RATINGS				
PARAMETER	SYMBOL	TYP.	MAX.	UNIT
Maximum Junction-to-Ambient ^a	R_{thJA}	-	40	°C/W
Case-to-Sink, Flat, Greased Surface	R_{thCS}	0.24	-	
Maximum Junction-to-Case (Drain) ^a	R_{thJC}	-	0.28	

Note

 a. R_{th} is measured at T_J approximately 90 °C.

SPECIFICATIONS $T_J = 25$ °C, unless otherwise noted							
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT	
Static							
Drain-Source Breakdown Voltage	V_{DS}	$V_{GS} = 0$ V, $I_D = 250$ μ A	600	-	-	V	
V_{DS} Temperature Coefficient	$\Delta V_{DS}/T_J$	Reference to 25 °C, $I_D = 1$ mA ^d	-	0.66	-	V/°C	
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250$ μ A	3.0	-	5.0	V	
Gate-Source Leakage	I_{GSS}	$V_{GS} = \pm 30$ V	-	-	± 100	nA	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 600$ V, $V_{GS} = 0$ V	-	-	50	μ A	
		$V_{DS} = 480$ V, $V_{GS} = 0$ V, $T_J = 125$ °C	-	-	250		
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = 10$ V, $I_D = 18$ A ^b	-	0.16	0.19	Ω	
Forward Transconductance	g_{fs}	$V_{DS} = 50$ V, $I_D = 18$ A	16	-	-	S	
Dynamic							
Input Capacitance	C_{iss}	$V_{GS} = 0$ V, $V_{DS} = 25$ V, $f = 1.0$ MHz	-	5870	-	pF	
Output Capacitance	C_{oss}		-	530	-		
Reverse Transfer Capacitance	C_{riss}		-	54	-		
Output Capacitance	C_{oss}	$V_{GS} = 0$ V	$V_{DS} = 1.0$ V, $f = 1.0$ MHz	-	6920	-	
Effective Output Capacitance	$C_{oss\ eff.}$		$V_{DS} = 480$ V, $f = 1.0$ MHz	-	140	-	
Total Gate Charge	Q_g	$V_{GS} = 10$ V	$I_D = 30$ A, $V_{DS} = 480$ V ^b	-	-	220	nC
Gate-Source Charge	Q_{gs}			-	-	64	
Gate-Drain Charge	Q_{gd}			-	-	110	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 300$ V, $I_D = 30$ A, $R_G = 3.9$ Ω , $V_{GS} = 10$ V ^b	-	29	-	ns	
Rise Time	t_r		-	120	-		
Turn-Off Delay Time	$t_{d(off)}$		-	56	-		
Fall Time	t_f		-	50	-		
Drain-Source Body Diode Characteristics							
Continuous Source-Drain Diode Current	I_S	MOSFET symbol showing the integral reverse p - n junction diode 	-	-	30	A	
Pulsed Diode Forward Current ^a	I_{SM}		-	-	120		
Body Diode Voltage	V_{SD}	$T_J = 25$ °C, $I_S = 30$ A, $V_{GS} = 0$ V ^b	-	-	1.5	V	
Body Diode Reverse Recovery Time	t_{rr}	$T_J = 25$ °C, $I_F = 30$ A, $di/dt = 100$ A/ μ s ^b	-	640	960	ns	
Body Diode Reverse Recovery Charge	Q_{rr}		-	11	16	μ C	
Body Diode Recovery Current	I_{RRM}		-	31	-	A	
Forward Turn-On Time	t_{on}	Intrinsic turn-on time is negligible (turn-on is dominated by L_S and L_D)					

Notes

a. Repetitive rating; pulse width limited by maximum junction temperature (see fig. 11).

 b. Pulse width ≤ 300 μ s; duty cycle ≤ 2 %.

 c. $C_{oss\ eff.}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80 % V_{DS} .



IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

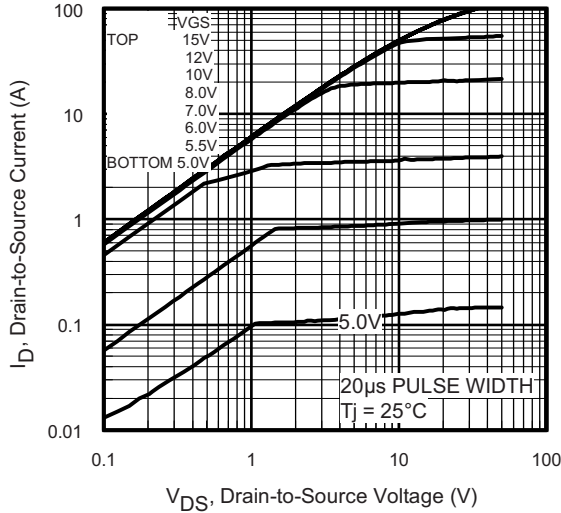


Fig. 1 - Typical Output Characteristics

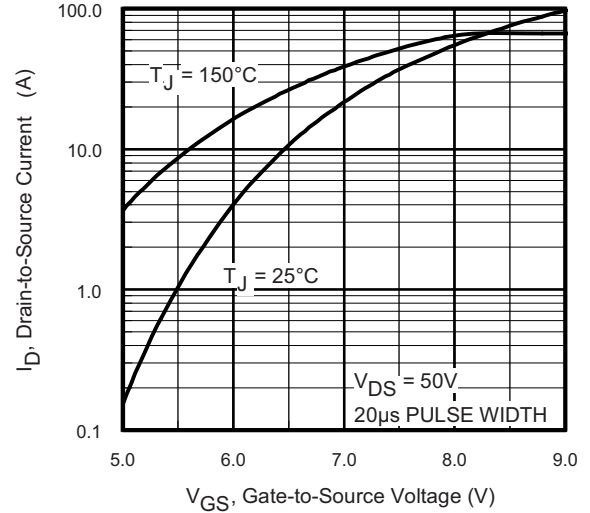


Fig. 3 - Typical Transfer Characteristics

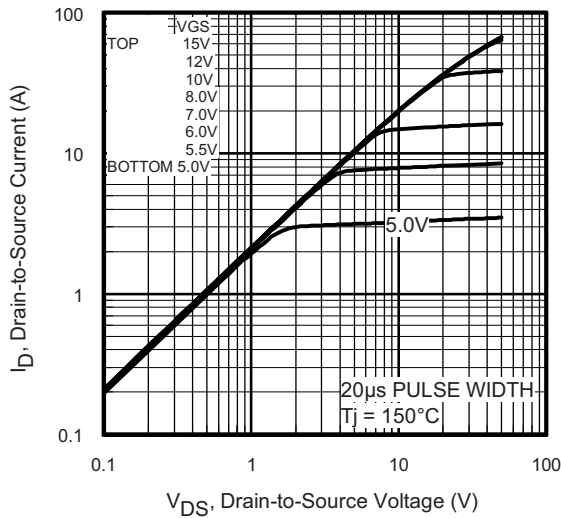


Fig. 2 - Typical Output Characteristics





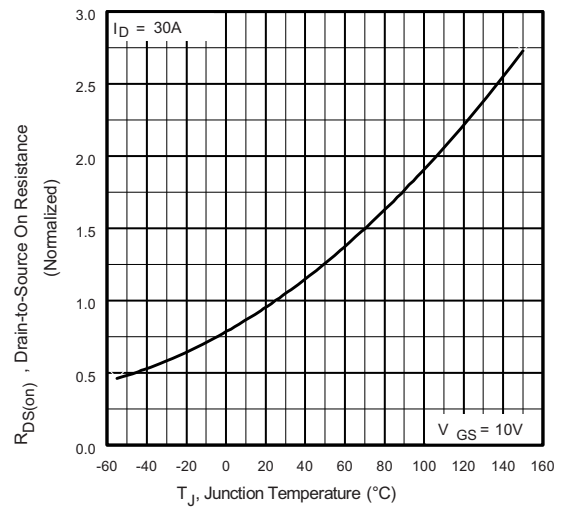


Fig. 4 - Normalized On-Resistance vs. Temperature

IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

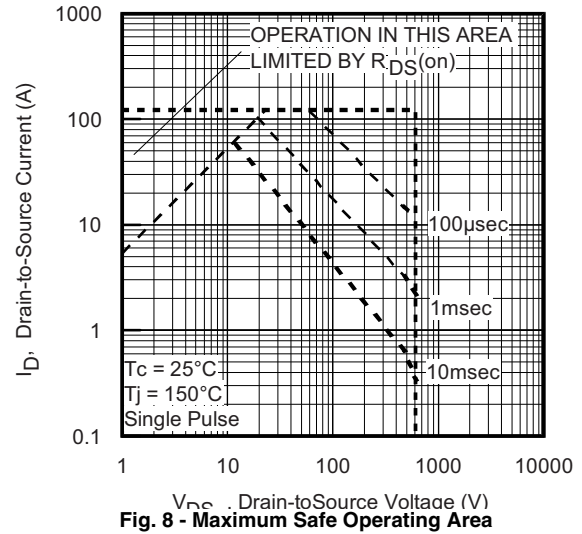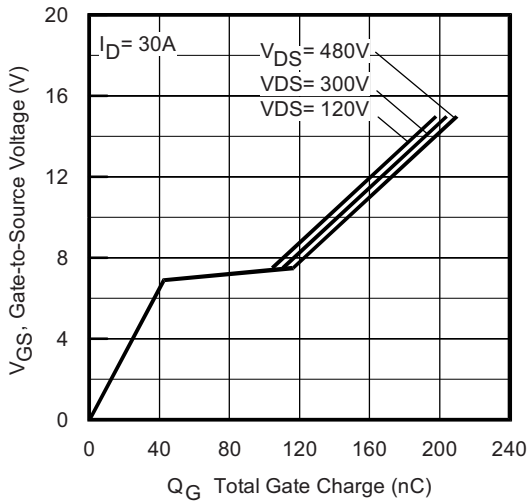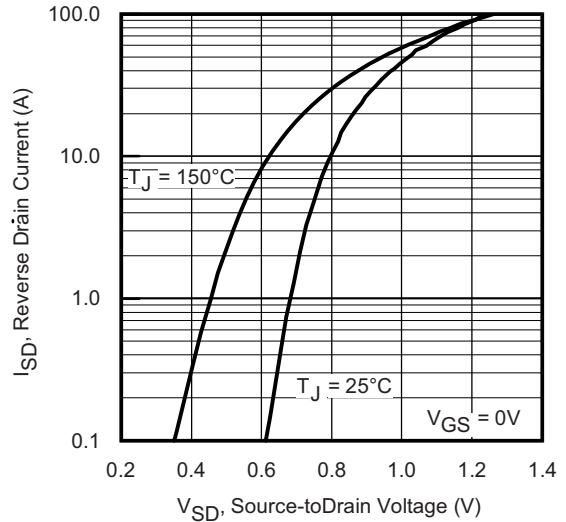

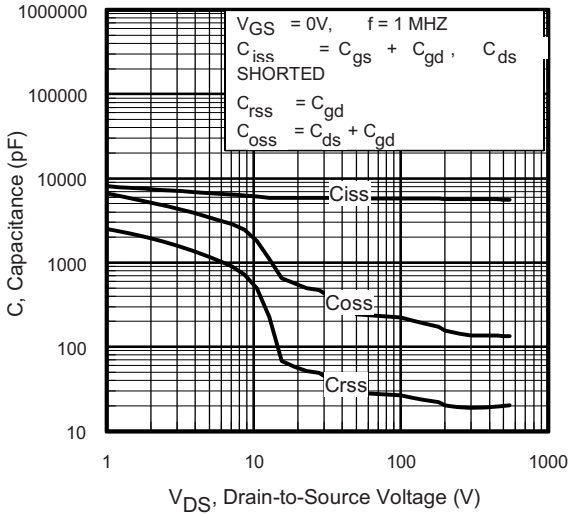

IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

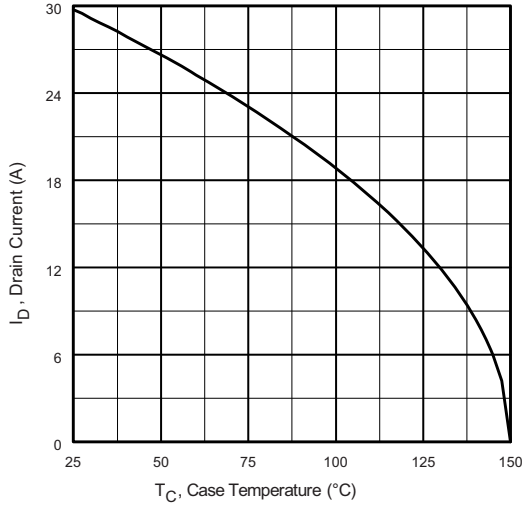


Fig. 9 - Maximum Drain Current vs. Case Temperature

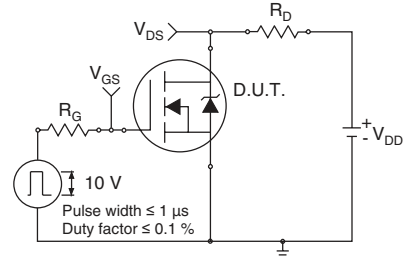


Fig. 10a - Switching Time Test Circuit

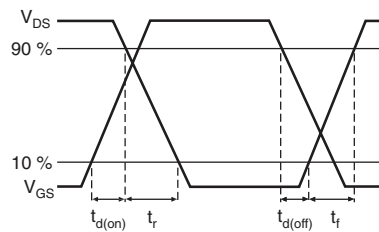


Fig. 10b - Switching Time Waveforms

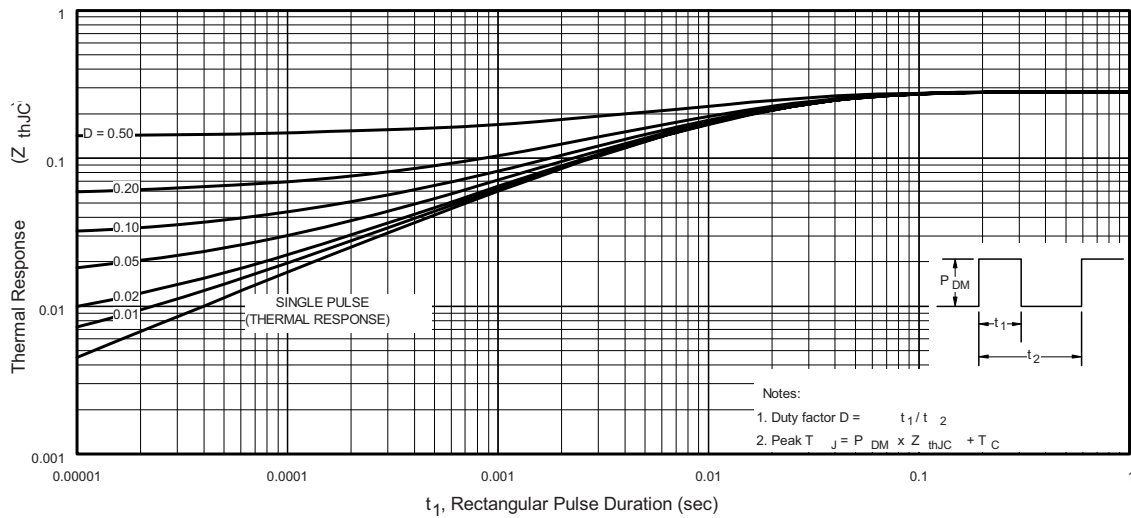


Fig. 11 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

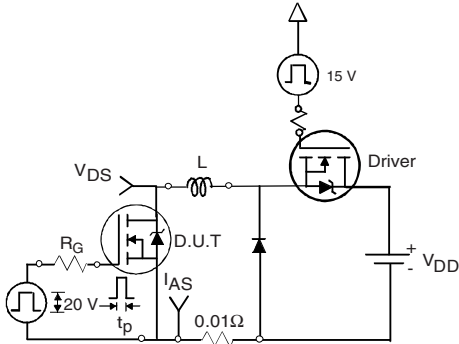


Fig. 12a - Unclamped Inductive Test Circuit

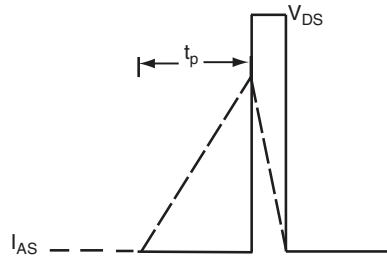


Fig. 12b - Unclamped Inductive Waveforms

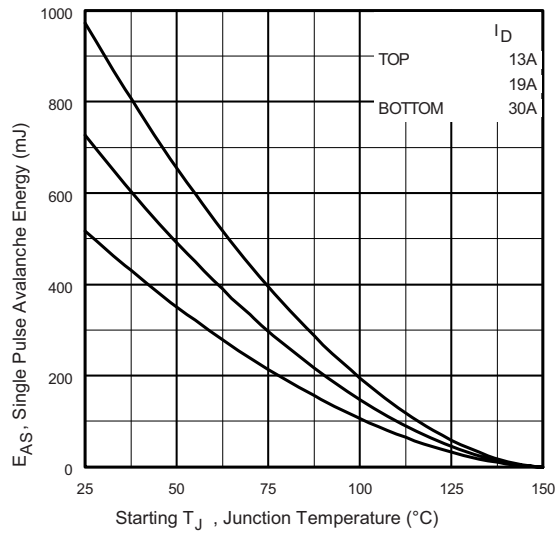


Fig. 12c - Maximum Avalanche Energy vs. Drain Current

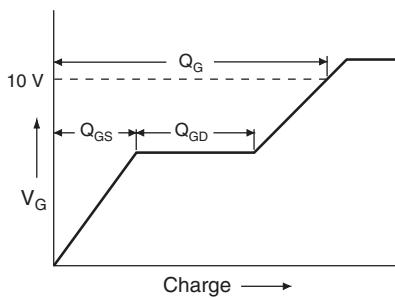


Fig. 13a - Basic Gate Charge Waveform

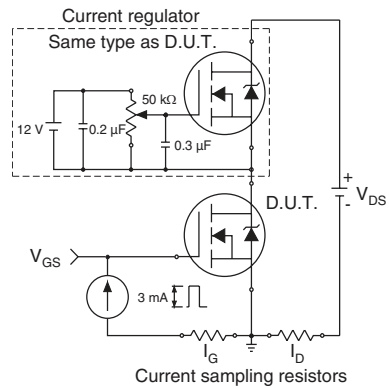




Fig. 13b - Gate Charge Test Circuit



IRFPS30N60K, SiHFPS30N60K

Vishay Siliconix

Peak Diode Recovery dV/dt Test Circuit

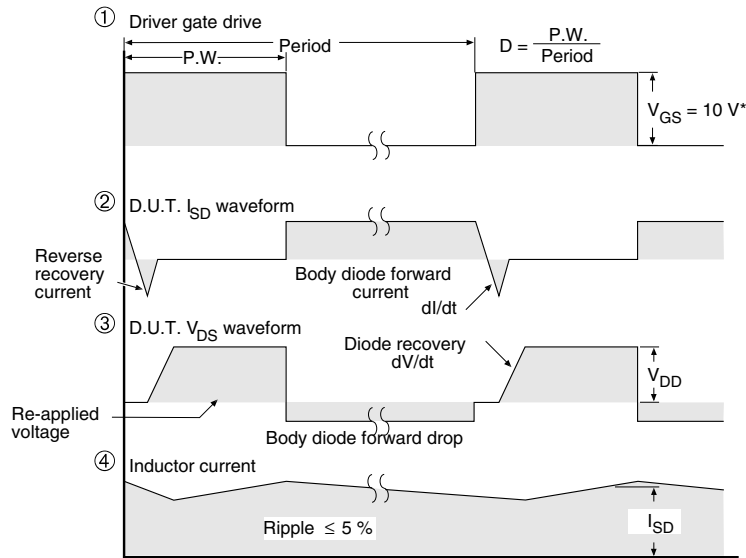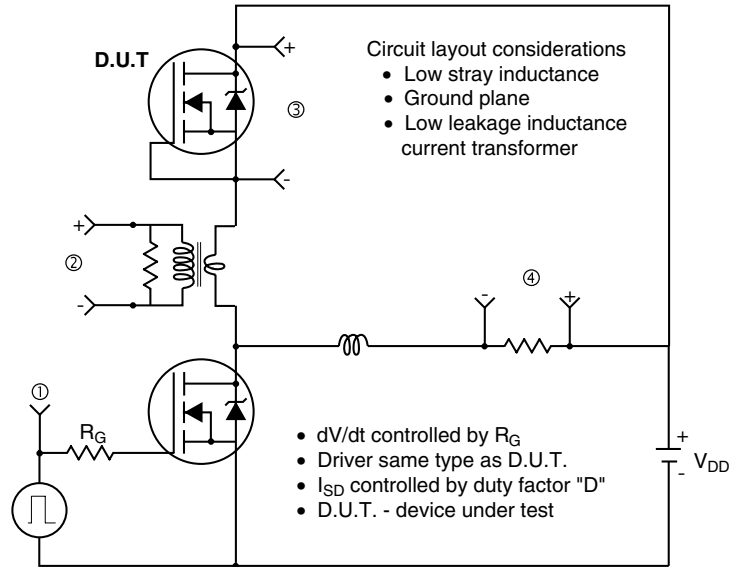

* $V_{GS} = 5 V$ for logic level devices

Fig. 14 - For N-Channel

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?91256.



Legal Disclaimer Notice

Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.