

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Memory Protection Devices](#)
[BH600SM](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

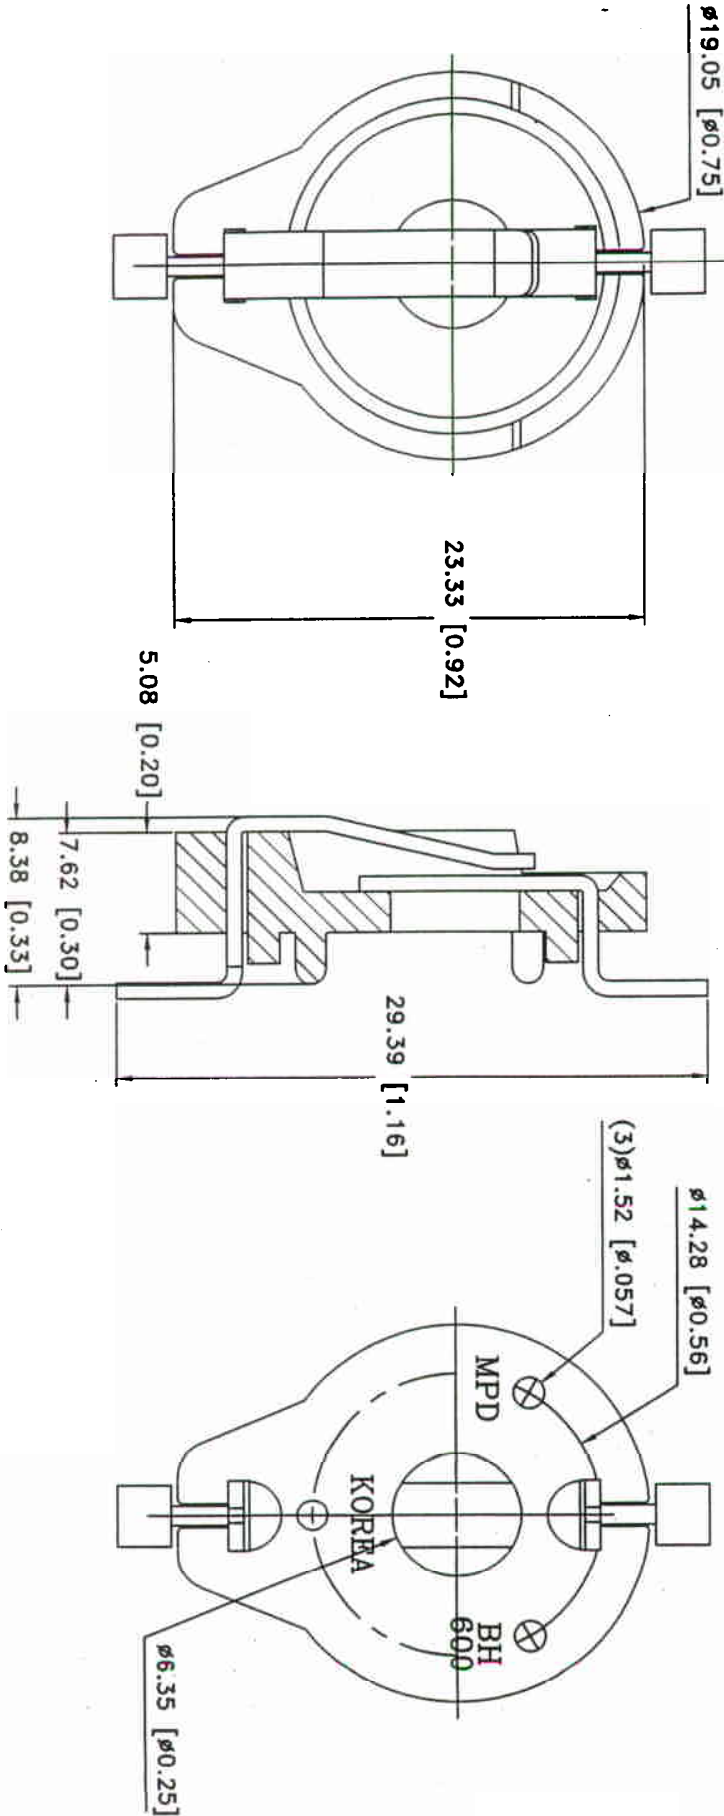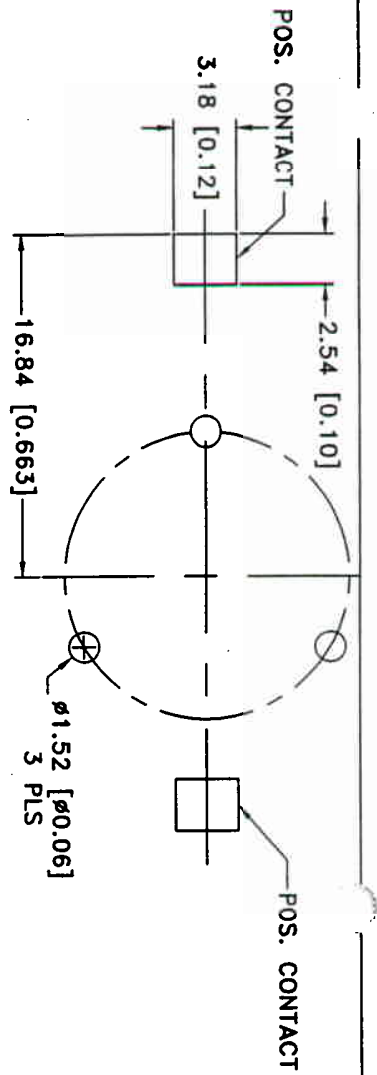

Date	SYM	REVISION	RECOM	AUTH	DR. CK

SPECIFICATIONS

- *Holder material—thermoplastic, black PBT
- *Flammability rating—UL94V-0, File No.88499(M)
- *Contacts—302 spring temper stainless steel nickel plated overall
- *Dielectric strength—560volts/mil at 25°C for 5seconds
- *Temperature range—-55° to +180°C
- *Resistance to solvents—Xylene,ethyl,butyl,methyl&propl alcohol;ethyl acetate,heptane,toluene;refrigerant

Tolerance (Except as noted)	Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By T.B.
Fractional	Title		
$\pm .8$ (.030)	BR/CR/DL 1620/1632 COIN BATTERY HOLDER		
Angular	Date	Drawing Number	
$\pm 3^\circ$	11/03/01	BH600SM	