

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[ASSMANN WSW Components](#)
[AB914F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

1 2 3 4 5 6 7

DB25 FEMALE

DB9 MALE

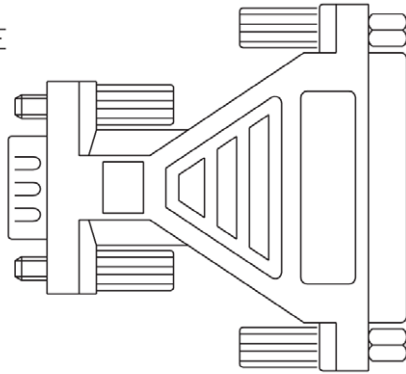

CONFIGURATION:

DB9M	DB25F
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHIELD	SHIELD

Material:

- Jump Wires: (UL1007) #26 9C+(GROUND)
- Connectors: Both Connectors with Normal Type
- Thumbscrew:#4-4OUNC TYPE
DB9 Female Thumbscrew+Nut(#4-4OUNC Type)
- Outer Molded with Beige PVC
- Color: Beige
- Molded Type

Scale	1:1				Name	Item No. AB914F	
TOLERANCE				Drawn	01.03.12		Title D-Sub 9-Pin Male to D-Sub 25-pin Female
X.X	±0.40			Approved			
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°					Drawing No.	
						rev00	
						Modification	Date

1 2 3 4 5 6 7