

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ohmite](#)

[RW1S0CKR005DE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


RW1/RW2 Series

Surface Mount Four Terminal Current Sense



FEATURES

- Extremely low resistance and high precision tolerance
- Low T.C.R. achieved ($\pm 50 \text{ ppm}/^\circ\text{C}$)
- Flameproof UL94-V-0
- Marking: Black body color with white marking

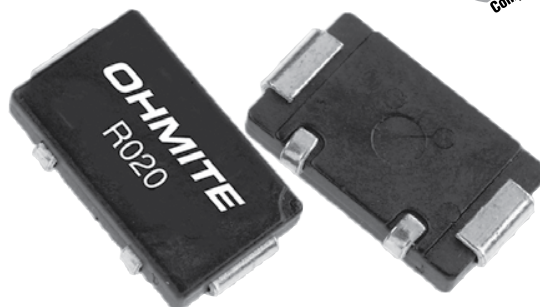

SERIES SPECIFICATIONS

Type	Power Rating (watts)	Resistance Range E-12 (m Ω)	Resistance Tolerance	Dielectric Withstanding Voltage	TCR (max. ppm/ $^\circ\text{C}$)	Qty./Reel
RW1S0CK	1	5m Ω - 50m Ω	1%	500V	± 50	1000
RW2S0DK	2	5m Ω - 50m Ω	1%	500V	± 50	1000


CHARACTERISTICS

TCR max. $\pm 50 \text{ ppm}/^\circ\text{C}$


Rated Ambient Temp. $+70^\circ\text{C}$

Operating Temp. Range -55°C - $+125^\circ\text{C}$


Typical Schematic



Derating

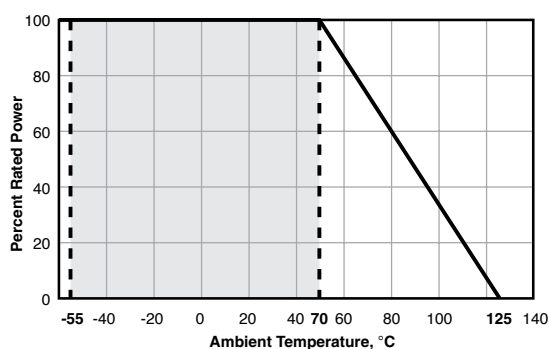

Surface Temperature Rise



PERFORMANCE DATA


Parameter	Requirement ΔR Limit	Typical	Test Method
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	$+25^\circ\text{C}/-55^\circ\text{C}$ and $+25^\circ\text{C}/+125^\circ\text{C}$
Overload	$\pm 1.0\%$	$\pm 1.0\%$	Rated power x 5 for 5 seconds
Resistance to Solder Heat	$\pm 1.0\%$	$\pm 1.0\%$	$260^\circ\text{C} \pm 5^\circ\text{C}$, 10 seconds ± 1 second
Rapid Change of Temperature	$\pm 1.0\%$	$\pm 0.5\%$	-55°C (30 minutes), $+125^\circ\text{C}$ (30 minutes), 500 cycles
Moisture Resistance	$\pm 2.0\%$	$\pm 0.5\%$	$40^\circ\text{C} \pm 2^\circ\text{C}$, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	$\pm 1.0\%$	$\pm 0.5\%$	$70^\circ\text{C} \pm 2^\circ\text{C}$, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Operation	$\pm 0.5\%$	$\pm 0.25\%$	-55°C , 1 hour
High Temperature Exposure	$\pm 0.5\%$	$\pm 0.25\%$	$+125^\circ\text{C}$, 100 hours

RW1/RW2 Series

Surface Mount Four Terminal Current Sense


DIMENSIONS

(in./mm)

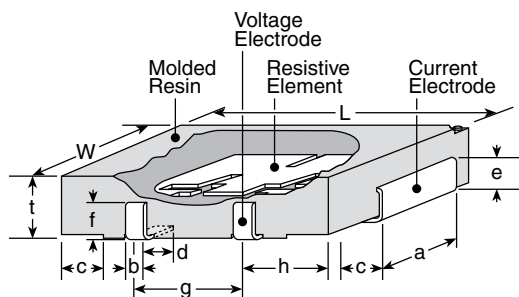

Land Pattern

Dimensions for reference only

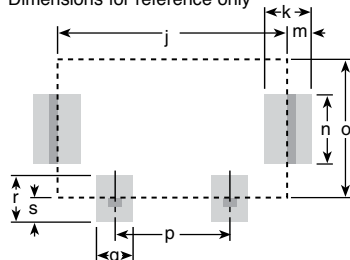

	RW1S0CK	RW2S0DK
L	0.425±0.02 (10.8±0.5)	0.504±0.02 (12.8±0.5)
W	0.244±0.012 (6.2±0.3)	0.323±0.012 (8.2±0.3)
t	0.083±0.008 (2.1±0.2)	0.122±0.008 (3.1±0.2)
a	0.118±0.012 (3.0±0.3)	0.197±0.012 (5.0±0.3)
b	0.031±0.008 (0.8±0.2)	0.039±0.008 (1.0±0.2)
c	0.055±0.02 (1.4±0.5)	0.079±0.02 (2.0±0.5)
d	0.047±0.02 (1.2±0.5)	0.079±0.02 (2.0±0.5)
e	0.051±0.012 (1.3±0.3)	0.087±0.012 (2.2±0.3)
f	0.051±0.012 (1.3±0.3)	0.087±0.012 (2.2±0.3)
g	0.197±0.004 (5.0±0.1)	0.236±0.004 (6.0±0.1)
h	0.098±0.004 (2.5±0.1)	0.118±0.004 (3.0±0.1)
j	0.39 (10.0)	0.47 (12.0)
k	0.08 (2.0)	0.09 (2.3)
m	0.04 (1.0)	0.05 (1.15)
n	0.12 (3.0)	0.21 (5.3)
o	0.24 (6.0)	0.31 (8.0)
p	0.20 (5.0)	0.24 (6.0)
q	0.06 (1.6)	0.09 (2.2)
r	0.08 (2.0)	0.13 (3.2)
s	0.04 (1.0)	0.06 (1.6)

ORDERING INFORMATION

RoHS Compliant

RW1S0CKR005FET

Type & Power Rating
RW1S0CK = 1 watt
RW2S0DK = 2 watt

Ohms
R005 = 0.005Ω
R050 = 0.05Ω

Tolerance
F = 1%
D = 0.5%

Packaging
T = tape and reel (optional)

The part itself will be marked as follows:

Current Sense Resistor

Power Rating (watts)

CSR1

10m ohms D

Tolerance
F = 1%
D = 0.5%

Ohms
10m ohms = 0.01Ω

Standard Part Numbers for RW Series

Wattage:		1 watt		2 watt			
Tolerance:		1%		0.5%		1%	
Ohms	Series:	RW1S0CK----FET		RW1S0CK----DET		RW2S0DK----FET	
0.00500		RW1S0CKR005FET		RW1S0CKR005DET		RW2S0DKR005FET	
0.01000		RW1S0CKR010FET		RW1S0CKR010DET		RW2S0DKR010FET	
0.02500		RW1S0CKR025FET		RW1S0CKR025DET		RW2S0DKR025FET	
0.05000		RW1S0CKR050FET		RW1S0CKR050DET		RW2S0DKR050FET	