

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[NorComp](#)  
[689-096-290-001](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DESCRIPTION: 64 PIN DIN FEMALE DIP SOLDER

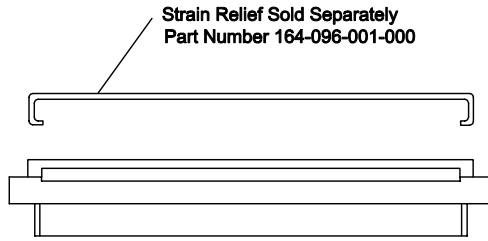

689-096-290-001  
 096 = ROWS A AND C ONLY

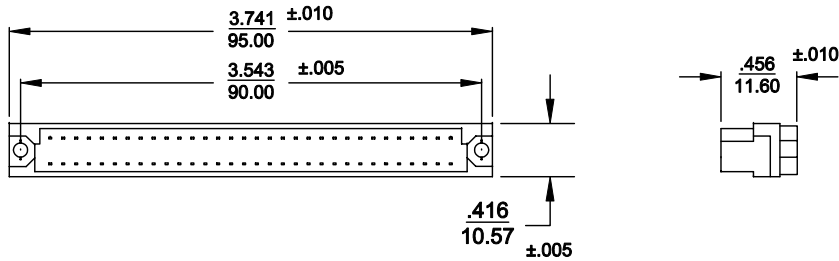


**Materials:**

Insulator: Glass-Filled PBT U.L. rated 94V-0  
 Contacts: Cu Alloy, Double Spring Hardened

**Electricals:**

Current Rating: 1 Amp max for 28 AWG , 1.5Amp max. for 26 AWG  
 Operating Temperature: -40°C to +145°C

|   |   |                                   |                                  |                          |
|---|---|-----------------------------------|----------------------------------|--------------------------|
| <br><b>NorComp</b> | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. |                                   | DRAWN:<br><b>WAYNE ROBBINS</b>   | DATE:<br><b>10-19-98</b> |
|   |   |                                   | CHECKED:                         | DATE:                    |
|   |   | SCALE:<br>1:1                     | SHEET<br><b>1</b> OF<br><b>1</b> | REV<br><b>1</b>          |
|   |   | DWG NO.<br><b>689-XXX-290-001</b> |                                  |                          |