

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AWP14-8240-T-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

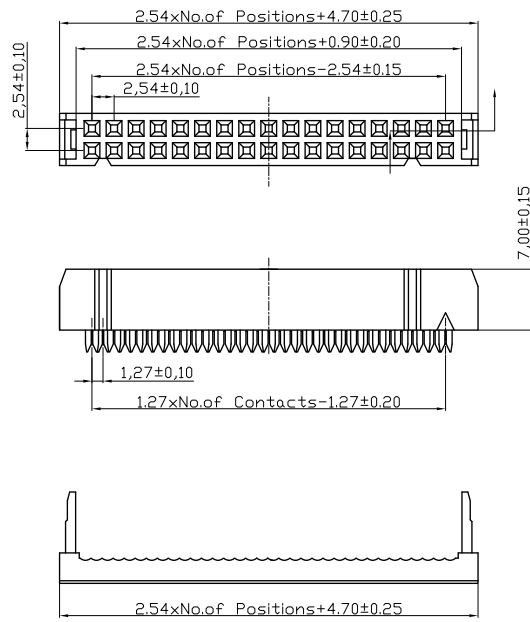

NOTES:

MATERIAL


1. Insulator Material: PBT+30%GF(UL94V-0)
2. Contact Material : Brass
3. Contact Plating :
AWP xx-8240-T : Gold flash over Ni
AWP xx-8540-T : Tin over Ni

ELECTRICAL

1. Current Rating : 3AMP
2. Voltage Rating : 500V AC/DC
3. Withstand Voltage : 1000V AC/DC
4. Contact Resistance : 20mΩ max
5. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

1. Operation Temperature: -40°C to +105°C
2. Packing: Tray



Section A-A

RoHS compliant

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	21.12.2009	Dean
X.X	±0.40					Approved	21.12.2009	Hellwig
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
		①	Drawn	21.12.2009	Dean			
		Id.	Modification	Date	Name			
						ASSMANN WSW-No.		
						AWP xx-8x40-T		
						Drawing-No.		
						ASS 2261A CO		rev01
						Replace		Sheet