


PIN ASSIGNMENT:

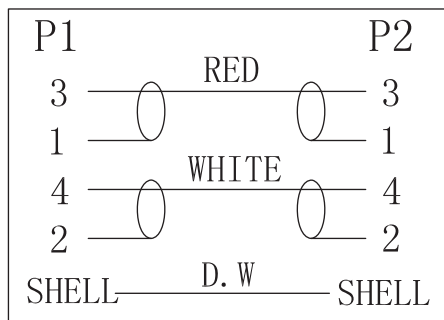

Material:

- Cable: UL2835 (30#*1COAX+S)*2C+AL/MY+D.W(7/0.12)
 - OD: 7.0mm
 - Jacket: Black
 - Length: 5,000±20mm
- P1 & P2 connectors:
 - MiniDIN 4pin Male G/F S-VHS Shell
 - OD: 12.0mm
- Tube: Heat shrink tube, Black, OD3.0*7mm/OD1.5*8mm
- Inner Jacket: Clarity LDPE
- Outer Jacket: PVC 70P, color Black

Electrical:

- 100% short, open, miswire test
- Conductor resistance: 10Ω max.
- Insulation Resistance: 10Ω min.
- Dielectric test: DC 300V

Unit: mm



Scale	Free					Date	Name	
TOLERANCE						Drawn	13.03.15	Wilson
X.	±0.3					Approved	13.03.15	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		

Title	
S-VHS Connection cable	
High Quality, 4 pin Male(2), 5 Meters	
ASSMANN WSW-No.	
AK-AV507	
Drawing-No.	rev00
Replace	Sheet 1/1