

## Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)  
[A-MO-6/4-SF](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

1	2	3	4	5	6	7
---	---	---	---	---	---	---

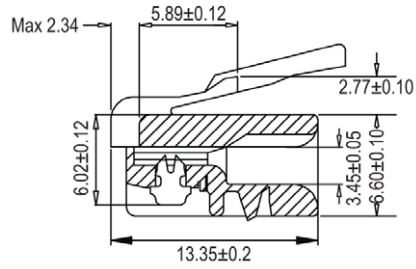

**Material:**

- Housing: Polycarbonate UL94V2
- Contact Blade: High Strength Copper Alloy
- 100 Micron Nickel underplated
- Plating type: 8% Phosphor Bronze
- Plating Thickness: 6µ" Gold plated
- Operating Temperature: -40°C ~ 125°C

**Electrical:**

- Current Rating: 250V AC / Max @2.0A
- Dielectric: 500V AC
- Insulation Resistance: 500MΩ

**Complies with FCC68/F**

Unit: MM

Scale	1:1							Name
TOLERANCE								Drawn 12.19.11 Chappell
X.X	±0.40							Approved
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
Modification				Date	Name			



Item No.	<b>A-MO-6/4-SF</b>
Title	Modular Cable Plug - 6P4C, Flat cable, Unshielded
Drawing No.	<b>rev00</b>
Replace	Sheet

1	2	3	4	5	6	7
---	---	---	---	---	---	---