

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Grayhill, Inc. 22-11

For any questions, you can email us directly: sales@integrated-circuit.com

Distributor of Grayhill, Inc.: Excellent Integrated System Limited

Datasheet of 22-11 - CONN SOCKET TRANSIST 4POS GOLD

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Sockets



SERIES 22

TRANSISTOR SOCKET FEATURES

 Sockets for JETEC Transistors and Similar Packaged Devices

LAMP SOCKET FEATURES


- Sockets for the Popular Sizes of Miniature Lamps
- Secondary Use: Pencil Tube Socket


Transistor Sockets




Bi-Pin Lamp Sockets

DIMENSIONS In Inches (and millimeters)

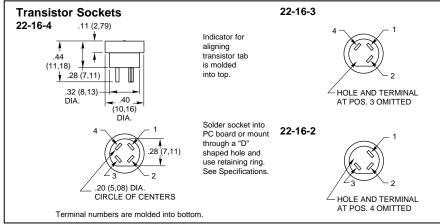





Bi-Pin Lamp Sockets .260 .358 (9,09) 22-250 (6,60)DIA. .343_ 125 (3,18) .015 (0,38) .025 .050 (1,27) (0.64)TO FIT HOLES ON TO FIT HOLES ON -.300 (7,62) CENTERS .500 (12,7) CENTERS .016 (0,41) .034 (0,86) I AMPS-NOT .250 (6.35) -SUPPLIED ш .343 .250 (6,35) (8,71).215 (5,46) length Н .385 025 [∟].125 (3,18) <-.625 (15,88) > (9.78) **-**.625 (15.88)→ TO FIT HOLES ON — .100 (2,54) CENTERS

SPECIFICATIONS

Ratings, Transistor Sockets

Operating Temperature: 265°F maximum

Loss Factor: .06 at 1 meg

Materials/Finishes, Transistor Sockets

Contacts: Wrap-around type, silver-plated

beryllium copper with gold plate

Housing: Natural color, mica-filled thermoset plastic per MIL–M–15, type MFE.

Recommended Clip Mounting: Use a Waldes

Truarc retaining ring, number #115–31.

Recommended Rivet and Screw Mounting:

Rivets or #2 screws.

Materials/Finishes, Lamp Sockets

Insulating Material: Mica-filled thermoset plastic per MIL–M14 type MFE for part 22-3; and thermoset plastic for part 22-250.

Saddle (For 22-250): Lead-tin plated brass.
Contacts (For 22-250): Gold-plated beryllium copper

Socket Description	Transistor or Lamp Type (Not Provided)	Part Number
Transistor Sockets 3-Pin Clip Mount, Flat between pins 3-Pin Clip Mount, Flat opposite pins 4-Pin Clip Mount Transistor Socket 4-Pin Screw or Rivet Mount	TO-5, 9, 11, 16, 26, 29, 31, & 39 TO-5, 9, 11, 16, 26, 29, 31, & 39 TO-12 & 33 TO-12 & 33	22-16-2 22-16-3 22-16-4 22-11
Bi-Pin Lamp Sockets Perpendicular Mount Right Angle Mount	T-1-3/4 or Chicago Min. T-1-1/4 T-1-3/4	22-3 22-250

OPTION

Part number 22-11 is available with 3 terminals. **Option not available through Distributors**

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

ORDERING INFORMATION