

# **Excellent Integrated System Limited**


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor PN2222BU

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



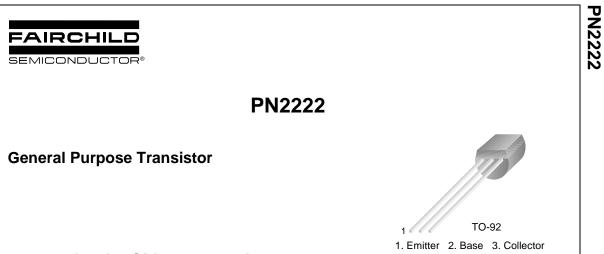

# **NPN Epitaxial Silicon Transistor**

Absolute Maximum Ratings  $T_a=25^{\circ}C$  unless otherwise noted


Symbol	Parameter	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage	60	V
V <sub>CEO</sub>	Collector-Emitter Voltage	30	V
V <sub>EBO</sub>	Emitter-Base Voltage	5	V
I <sub>C</sub>	Collector Current	600	mA
P <sub>C</sub>	Collector Power Dissipation	625	mW
TJ	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C

# Electrical Characteristics T<sub>a</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> =10μA, I <sub>E</sub> =0	60		V
BV <sub>CEO</sub>	Collector Emitter Breakdown Voltage	I <sub>C</sub> =10mA, I <sub>B</sub> =0	30		V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> =10μA, I <sub>C</sub> =0	5		V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> =50V, I <sub>E</sub> =0		0.01	μΑ
I <sub>EBO</sub>	Emitter Cut-off Current	V <sub>EB</sub> =3V, I <sub>C</sub> =0		10	nA
h <sub>FE</sub>	DC Current Gain	V <sub>CE</sub> =10V, I <sub>C</sub> =0.1mA V <sub>CE</sub> =10V, *I <sub>C</sub> =150mA	35 100	300	
V <sub>CE</sub> (sat)	* Collector-Emitter Saturation Voltage	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA		1	V
V <sub>BE</sub> (sat)	* Base-Emitter Saturation Voltage	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA		2	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> =20V, I <sub>C</sub> =20mA, f=100MHz	300		MHz
C <sub>ob</sub>	Output Capacitance	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz		8	pF

\* Pulse Test: Pulse Width≤300µs, Duty Cycle≤2%



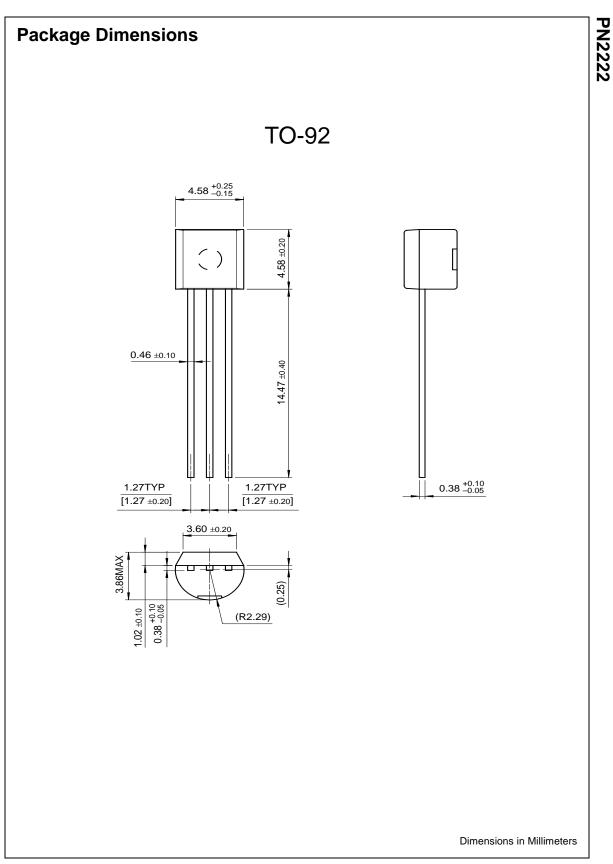

©2002 Fairchild Semiconductor Corporation

Rev. A, November 2004



TRADEMARKS				
0	gistered and unregistered tr khaustive list of all such trac	lemarks.	onductor owns or is author	ized to use and is no
ACEx™	FAST®	ISOPLANAR™	Power247™	Stealth™
ActiveArray™	FASTr™	LittleFET™	PowerEdge™	SuperFET™
Bottomless™	FPS™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CoolFET™	FRFET™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
CROSSVOLT™	GlobalOptoisolator™	MicroPak™	QFET <sup>®</sup>	SuperSOT™-8
DOME™	GTO™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	HiSeC™	MSX™	QT Optoelectronics™	TinyLogic®
E <sup>2</sup> CMOS™	I <sup>2</sup> C™	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	<i>i-Lo</i> ™	OCX™	RapidConfigure™	TruTranslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC™
FACT Quiet Series	5 <sup>тм</sup>	OPTOLOGIC <sup>®</sup>	μSerDes™	UltraFET <sup>®</sup>
Across the board. Around the world.™		OPTOPLANAR™	SILENT SWITCHER <sup>®</sup>	VCX™
The Power Franchise <sup>®</sup>		PACMAN™	SMART START™	
Programmable Active Droop™		POP™	SPM™	

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

# LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.