

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Delta Electronics](#)

[VFD015M21A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Delta VFD-M Series

Variable Speed AC Motor Drives



Features

- ▶ 16-bit microprocessor controlled PWM output
- ▶ Automatic torque boost & slip compensation
- ▶ Output frequency 0.1~400Hz
- ▶ 8-step speed control & 7-step process control
- ▶ Low-noise carrier frequency up to 15kHz
- ▶ 2 accel./decel. times & S-curve
- ▶ Process follower 0~10VDC, 4~20mA
- ▶ Communication interface RS-485 (Baud rate 38400)
- ▶ Energy saving & automatic voltage regulation
- ▶ Adjustable V/F curve & Simple vector control
- ▶ Automatic adjustment of accel./decel. times
- ▶ PID feedback control
- ▶ Simple position function
- ▶ 6 Speed Holding function
- ▶ Sleep / Revival function build-in



- Voltage Range:**
- 1 Phase 115V Series : 0.2~0.75kW (0.25~1HP)
 - 1 Phase 230V Series : 0.4~2.2kW (0.5~3HP)
 - 3 Phase 230V Series : 0.4~5.5kW (0.5~7.5HP)
 - 3 Phase 460V Series : 0.75~7.5kW (1~10HP)
 - 3 Phase 575V Series : 0.75~7.5kW (1~10HP)



VFD-M series have been approved by CE and UL.


www.delta.com.tw/industrialautomation

2009/02/14&02/16E



Dimensions

Model		W1	H	D	D1	Q	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	Q16	Q17	Q18	Q19	Q20	Q21	Q22	Q23	Q24	Q25	Q26	Q27	Q28	Q29	Q30	Q31	Q32	Q33	Q34	Q35	Q36	Q37	Q38	Q39	Q40	Q41	Q42	Q43	Q44	Q45	Q46	Q47	Q48	Q49	Q50	Q51	Q52	Q53	Q54	Q55	Q56	Q57	Q58	Q59	Q60	Q61	Q62	Q63	Q64	Q65	Q66	Q67	Q68	Q69	Q70	Q71	Q72	Q73	Q74	Q75	Q76	Q77	Q78	Q79	Q80	Q81	Q82	Q83	Q84	Q85	Q86	Q87	Q88	Q89	Q90	Q91	Q92	Q93	Q94	Q95	Q96	Q97	Q98	Q99	Q100	Q101	Q102	Q103	Q104	Q105	Q106	Q107	Q108	Q109	Q110	Q111	Q112	Q113	Q114	Q115	Q116	Q117	Q118	Q119	Q120	Q121	Q122	Q123	Q124	Q125	Q126	Q127	Q128	Q129	Q130	Q131	Q132	Q133	Q134	Q135	Q136	Q137	Q138	Q139	Q140	Q141	Q142	Q143	Q144	Q145	Q146	Q147	Q148	Q149	Q150	Q151	Q152	Q153	Q154	Q155	Q156	Q157	Q158	Q159	Q160	Q161	Q162	Q163	Q164	Q165	Q166	Q167	Q168	Q169	Q170	Q171	Q172	Q173	Q174	Q175	Q176	Q177	Q178	Q179	Q180	Q181	Q182	Q183	Q184	Q185	Q186	Q187	Q188	Q189	Q190	Q191	Q192	Q193	Q194	Q195	Q196	Q197	Q198	Q199	Q200	Q201	Q202	Q203	Q204	Q205	Q206	Q207	Q208	Q209	Q210	Q211	Q212	Q213	Q214	Q215	Q216	Q217	Q218	Q219	Q220	Q221	Q222	Q223	Q224	Q225	Q226	Q227	Q228	Q229	Q230	Q231	Q232	Q233	Q234	Q235	Q236	Q237	Q238	Q239	Q240	Q241	Q242	Q243	Q244	Q245	Q246	Q247	Q248	Q249	Q250	Q251	Q252	Q253	Q254	Q255	Q256	Q257	Q258	Q259	Q260	Q261	Q262	Q263	Q264	Q265	Q266	Q267	Q268	Q269	Q270	Q271	Q272	Q273	Q274	Q275	Q276	Q277	Q278	Q279	Q280	Q281	Q282	Q283	Q284	Q285	Q286	Q287	Q288	Q289	Q290	Q291	Q292	Q293	Q294	Q295	Q296	Q297	Q298	Q299	Q300	Q301	Q302	Q303	Q304	Q305	Q306	Q307	Q308	Q309	Q310	Q311	Q312	Q313	Q314	Q315	Q316	Q317	Q318	Q319	Q320	Q321	Q322	Q323	Q324	Q325	Q326	Q327	Q328	Q329	Q330	Q331	Q332	Q333	Q334	Q335	Q336	Q337	Q338	Q339	Q340	Q341	Q342	Q343	Q344	Q345	Q346	Q347	Q348	Q349	Q350	Q351	Q352	Q353	Q354	Q355	Q356	Q357	Q358	Q359	Q360	Q361	Q362	Q363	Q364	Q365	Q366	Q367	Q368	Q369	Q370	Q371	Q372	Q373	Q374	Q375	Q376	Q377	Q378	Q379	Q380	Q381	Q382	Q383	Q384	Q385	Q386	Q387	Q388	Q389	Q390	Q391	Q392	Q393	Q394	Q395	Q396	Q397	Q398	Q399	Q400	Q401	Q402	Q403	Q404	Q405	Q406	Q407	Q408	Q409	Q410	Q411	Q412	Q413	Q414	Q415	Q416	Q417	Q418	Q419	Q420	Q421	Q422	Q423	Q424	Q425	Q426	Q427	Q428	Q429	Q430	Q431	Q432	Q433	Q434	Q435	Q436	Q437	Q438	Q439	Q440	Q441	Q442	Q443	Q444	Q445	Q446	Q447	Q448	Q449	Q450	Q451	Q452	Q453	Q454	Q455	Q456	Q457	Q458	Q459	Q460	Q461	Q462	Q463	Q464	Q465	Q466	Q467	Q468	Q469	Q470	Q471	Q472	Q473	Q474	Q475	Q476	Q477	Q478	Q479	Q480	Q481	Q482	Q483	Q484	Q485	Q486	Q487	Q488	Q489	Q490	Q491	Q492	Q493	Q494	Q495	Q496	Q497	Q498	Q499	Q500	Q501	Q502	Q503	Q504	Q505	Q506	Q507	Q508	Q509	Q510	Q511	Q512	Q513	Q514	Q515	Q516	Q517	Q518	Q519	Q520	Q521	Q522	Q523	Q524	Q525	Q526	Q527	Q528	Q529	Q530	Q531	Q532	Q533	Q534	Q535	Q536	Q537	Q538	Q539	Q540	Q541	Q542	Q543	Q544	Q545	Q546	Q547	Q548	Q549	Q550	Q551	Q552	Q553	Q554	Q555	Q556	Q557	Q558	Q559	Q560	Q561	Q562	Q563	Q564	Q565	Q566	Q567	Q568	Q569	Q570	Q571	Q572	Q573	Q574	Q575	Q576	Q577	Q578	Q579	Q580	Q581	Q582	Q583	Q584	Q585	Q586	Q587	Q588	Q589	Q590	Q591	Q592	Q593	Q594	Q595	Q596	Q597	Q598	Q599	Q600	Q601	Q602	Q603	Q604	Q605	Q606	Q607	Q608	Q609	Q610	Q611	Q612	Q613	Q614	Q615	Q616	Q617	Q618	Q619	Q620	Q621	Q622	Q623	Q624	Q625	Q626	Q627	Q628	Q629	Q630	Q631	Q632	Q633	Q634	Q635	Q636	Q637	Q638	Q639	Q640	Q641	Q642	Q643	Q644	Q645	Q646	Q647	Q648	Q649	Q650	Q651	Q652	Q653	Q654	Q655	Q656	Q657	Q658	Q659	Q660	Q661	Q662	Q663	Q664	Q665	Q666	Q667	Q668	Q669	Q670	Q671	Q672	Q673	Q674	Q675	Q676	Q677	Q678	Q679	Q680	Q681	Q682	Q683	Q684	Q685	Q686	Q687	Q688	Q689	Q690	Q691	Q692	Q693	Q694	Q695	Q696	Q697	Q698	Q699	Q700	Q701	Q702	Q703	Q704	Q705	Q706	Q707	Q708	Q709	Q710	Q711	Q712	Q713	Q714	Q715	Q716	Q717	Q718	Q719	Q720	Q721	Q722	Q723	Q724	Q725	Q726	Q727	Q728	Q729	Q730	Q731	Q732	Q733	Q734	Q735	Q736	Q737	Q738	Q739	Q740	Q741	Q742	Q743	Q744	Q745	Q746	Q747	Q748	Q749	Q750	Q751	Q752	Q753	Q754	Q755	Q756	Q757	Q758	Q759	Q760	Q761	Q762	Q763	Q764	Q765	Q766	Q767	Q768	Q769	Q770	Q771	Q772	Q773	Q774	Q775	Q776	Q777	Q778	Q779	Q780	Q781	Q782	Q783	Q784	Q785	Q786	Q787	Q788	Q789	Q790	Q791	Q792	Q793	Q794	Q795	Q796	Q797	Q798	Q799	Q800	Q801	Q802	Q803	Q804	Q805	Q806	Q807	Q808	Q809	Q810	Q811	Q812	Q813	Q814	Q815	Q816	Q817	Q818	Q819	Q820	Q821	Q822	Q823	Q824	Q825	Q826	Q827	Q828	Q829	Q830	Q831	Q832	Q833	Q834	Q835	Q836	Q837	Q838	Q839	Q840	Q841	Q842	Q843	Q844	Q845	Q846	Q847	Q848	Q849	Q850	Q851	Q852	Q853	Q854	Q855	Q856	Q857	Q858	Q859	Q860	Q861	Q862	Q863	Q864	Q865	Q866	Q867	Q868	Q869	Q870	Q871	Q872	Q873	Q874	Q875	Q876	Q877	Q878	Q879	Q880	Q881	Q882	Q883	Q884	Q885	Q886	Q887	Q888	Q889	Q890	Q891	Q892	Q893	Q894	Q895	Q896	Q897	Q898	Q899	Q900	Q901	Q902	Q903	Q904	Q905	Q906	Q907	Q908	Q909	Q910	Q911	Q912	Q913	Q914	Q915	Q916	Q917	Q918	Q919	Q920	Q921	Q922	Q923	Q924	Q925	Q926	Q927	Q928	Q929	Q930	Q931	Q932	Q933	Q934	Q935	Q936	Q937	Q938	Q939	Q940	Q941	Q942	Q943	Q944	Q945	Q946	Q947	Q948	Q949	Q950	Q951	Q952	Q953	Q954	Q955	Q956	Q957	Q958	Q959	Q960	Q961	Q962	Q963	Q964	Q965	Q966	Q967	Q968	Q969	Q970	Q971	Q972	Q973	Q974	Q975	Q976	Q977	Q978	Q979	Q980	Q981	Q982	Q983	Q984	Q985	Q986	Q987	Q988	Q989	Q990	Q991	Q992	Q993	Q994	Q995	Q996	Q997	Q998	Q999	Q1000	Q1001	Q1002	Q1003	Q1004	Q1005	Q1006	Q1007	Q1008	Q1009	Q1010	Q1011	Q1012	Q1013	Q1014	Q1015	Q1016	Q1017	Q1018	Q1019	Q1020	Q1021	Q1022	Q1023	Q1024	Q1025	Q1026	Q1027	Q1028	Q1029	Q1030	Q1031	Q1032	Q1033	Q1034	Q1035	Q1036	Q1037	Q1038	Q1039	Q1040	Q1041	Q1042	Q1043	Q1044	Q1045	Q1046	Q1047	Q1048	Q1049	Q1050	Q1051	Q1052	Q1053	Q1054	Q1055	Q1056	Q1057	Q1058	Q1059	Q1060	Q1061	Q1062	Q1063	Q1064	Q1065	Q1066	Q1067	Q1068	Q1069	Q1070	Q1071	Q1072	Q1073	Q1074	Q1075	Q1076	Q1077	Q1078	Q1079	Q1080	Q1081	Q1082	Q1083	Q1084	Q1085	Q1086	Q1087	Q1088	Q1089	Q1090	Q1091	Q1092	Q1093	Q1094	Q1095	Q1096	Q1097	Q1098	Q1099	Q1100	Q1101	Q1102	Q1103	Q1104	Q1105	Q1106	Q1107	Q1108	Q1109	Q1110	Q1111	Q1112	Q1113	Q1114	Q1115	Q1116	Q1117	Q1118	Q1119	Q1120	Q1121	Q1122	Q1123	Q1124	Q1125	Q1126	Q1127	Q1128	Q1129	Q1130	Q1131	Q1132	Q1133	Q1134	Q1135	Q1136	Q1137	Q1138	Q1139	Q1140	Q1141	Q1142	Q1143	Q1144	Q1145	Q1146	Q1147	Q1148	Q1149	Q1150	Q1151	Q1152	Q1153	Q1154	Q1155	Q1156	Q1157	Q1158	Q1159	Q1160	Q1161	Q1162	Q1163	Q1164	Q1165	Q1166	Q1167	Q1168	Q1169	Q1170	Q1171	Q1172	Q1173	Q1174	Q1175	Q1176	Q1177	Q1178	Q1179	Q1180	Q1181	Q1182	Q1183	Q1184	Q1185	Q1186	Q1187	Q1188	Q1189	Q1190	Q1191	Q1192	Q1193	Q1194	Q1195	Q1196	Q1197	Q1198	Q1199	Q1200	Q1201	Q1202	Q1203	Q1204	Q1205	Q1206	Q1207	Q1208	Q1209	Q1210	Q1211	Q1212	Q1213	Q1214	Q1215	Q1216	Q1217	Q1218	Q1219	Q1220	Q1221	Q1222	Q1223	Q1224	Q1225	Q1226	Q1227	Q1228	Q1229	Q1230	Q1231	Q1232	Q1233	Q1234	Q1235	Q1236	Q1237	Q1238	Q1239	Q1240	Q1241	Q1242	Q1243	Q1244	Q1245	Q1246	Q1247	Q1248	Q1249	Q1250	Q1251	Q1252	Q1253	Q1254	Q1255	Q1256	Q1257	Q1258	Q1259	Q1260	Q1261	Q1262	Q1263	Q1264	Q1265	Q1266	Q1267	Q1268	Q1269	Q1270	Q1271	Q1272	Q1273	Q1274	Q1275	Q1276	Q1277	Q1278	Q1279	Q1280	Q1281	Q1282	Q1283	Q1284	Q1285	Q1286	Q1287	Q1288	Q1289	Q1290	Q1291	Q1292	Q1293	Q1294	Q1295	Q1296	Q1297	Q1298	Q1299	Q1300	Q1301	Q1302	Q1303	Q1304	Q1305	Q1306	Q1307	Q1308	Q1309	Q1310	Q1311	Q1312	Q1313	Q1314	Q1315	Q1316	Q1317	Q1318	Q1319	Q1320	Q1321	Q1322	Q1323	Q1324	Q1325	Q1326	Q1327	Q1328	Q1329	Q1330	Q1331	Q1332	Q1333	Q1334	Q1335	Q1336	Q1337	Q1338	Q1339	Q1340	Q1341	Q1342	Q1343	Q1344	Q1345</
-------	--	----	---	---	----	---	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	---------

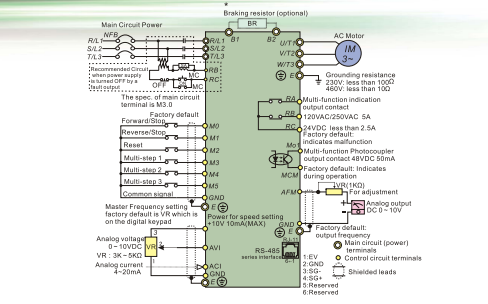

Standard specifications

115V Series 1-Phase			
	002	004	007
Model Number VFDCT11M	002	004	007
Max. Applicable Motor Output (kW)	0.2	0.4	0.75
Max. Applicable Motor Output (HP)	0.25	0.5	1.0
Rated Output Capacity (kVA)	0.6	1.0	1.6
Rated Output Current (A)	1.6	2.5	4.2
Maximum Output Voltage (V)	3-Phase proportional to twice the Input Voltage		
Output Frequency (Hz)	0.1~400Hz		
Carrier Frequency (kHz)	1~15		
Rated Input Current (A)	Single Phase		
Rated Voltage / Frequency	Single phase 100-120V / 50/60Hz		
Voltage Tolerance	±10%(50~120V)		
Frequency Tolerance	±5%(47~53Hz)		
Cooling Method	Fan Cooled		
Weight(kg)	1.5	1.5	1.5

230V Series 1-Phase/3-Phase						
	004	007	015	022	037	055
Model Number VFDCT11M	004	007	015	022	037	055
Max. Applicable Motor Output (kW)	0.4	0.75	1.5	2.2	3.7	5.5
Max. Applicable Motor Output (HP)	0.5	1.0	2.0	3.0	5.0	7.5
Rated Output Capacity (kVA)	1.0	1.9	2.7	3.8	6.5	9.5
Rated Output Current (A)	2.6	5.0	7.0	10	17	26
Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
Output Frequency (Hz)	0.1~400Hz					
Carrier Frequency (kHz)	1~15					
Rated Input Current (A)	Single / 3-Phase			3-Phase		
Single (3 phase) Input Current	6.3/2.9	11.6/7.6	15.7/8.8	27/12.5	19.6	28
Rated Voltage / Frequency	Single / 3-Phase			3-Phase		
	200-240V / 50 / 60Hz			200-240V / 50 / 60Hz		
Voltage Tolerance	±10%(180~264V)					
Frequency Tolerance	±5%(47~53Hz)					
Cooling Method	Fan Cooled					
Weight (kg)	2.2/1.5	2.2/1.5	2.2/1.5	2.2	3.2	3.2

460V Series 3-Phase						
	007	015	022	037	055	075
Model Number VFDCT11M	007	015	022	037	055	075
Max. Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5
Max. Applicable Motor Output (HP)	1.0	2.0	3.0	5.0	7.5	10
Rated Output Capacity (kVA)	2.3	3.1	3.8	6.2	9.9	13.7
Rated Output Current (A)	3.0	4.0	5.0	9.2	13	18
Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
Output Frequency (Hz)	0.1~400Hz					
Carrier Frequency (kHz)	1~15					
Rated Input Current (A)	4.2	5.7	6.0	8.5	14	23
Rated Voltage / Frequency	3-Phase 380 to 480V / 50 / 60Hz					
Voltage Tolerance	±10%(342~528V)					
Frequency Tolerance	±5%(47~53Hz)					
Cooling Method	Fan Cooled					
Weight (kg)	1.5	1.5	2.0	3.2	3.2	3.3

575V Series 3-Phase						
	007	015	022	037	055	075
Model Number VFDCT11M	007	015	022	037	055	075
Max. Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5
Max. Applicable Motor Output (HP)	1.0	2.0	3.0	5.0	7.5	10
Rated Output Capacity (kVA)	1.7	3.0	4.2	6.6	9.9	12.2
Rated Output Current (A)	1.7	3.0	4.2	6.6	9.9	12.2
Maximum Output Voltage (V)	3-Phase Proportional to input voltage					
Output Frequency (Hz)	0.1~400Hz					
Carrier Frequency (kHz)	1~15					
Rated Input Current (A)	3-Phase					
24	4.2	5.9	7.0	10.5	12.9	
Rated Voltage / Frequency	3-Phase 500 to 600V / 50 / 60Hz					
Voltage Tolerance	±10%(455~660V)					
Frequency Tolerance	±5%(47~53Hz)					
Cooling Method	Fan Cooled					
Weight (kg)	1.5	1.5	2.0	3.2	3.2	3.3

Control Characteristics	Control System	SPWM (Sinusoidal Pulse Width Modulation) control (V/F or sensorless vector control)	
	Freq. Setting Resolution	0.1 Hz	
	Output Frequency Resolution	0.1 Hz	
	Torque Characteristics	Including the auto-torque, auto-stop compensation, starting torque can be 150% at 15Hz	
	Overload Endurance	150% of rated current for 1 minute	
	Stop Frequency	Three zones, settings range 0.1~400Hz	
	Accel/Decel Time	0.1 to 600 seconds (2 independent settings for Accel/Decel Time)	
	Sail Prevention Level	20%~200%, Setting of Rated Current	
	Frequency Setting	Operation frequency 0~400Hz, output 0~100% rated current	
	DC Injection Braking	Start time 0~5 seconds, stop time 0~25 seconds	
Braking Torque	Braking Torque	Approx. 20% (up to 120% possible with option braking resistor or braking unit externally mounted)	
	V/F Pattern	Adjustable V/F pattern	
	Frequency Setting	Set by [F]	
	External Signal	Potentiometer-0V/5V, 0V to 10VDC, 4 to 20mA, RS-485 interface; Multi-Function Inputs 0 to 5 (Stop, Jog, up/down)	
	Keypad	Set by RUN, STOP	
	Operation Setting	2 wires / 3 wires (Run, Stop, Forward / Rev., Jog operation, RS-485 serialinterface (MODBUS))	
	External Signal		
	Multi-Function Input Signal	Multi-step selection 0 to 7, Jog, accel/decel inhibit, first to fourth accel/decel switches, counter, PLC operation, external Base Block (NC, NO), auxiliary motor control is invalid, AC/AVI selections, drive reset, UP/DOWN key settings, sink/source selection	
	Multi-Function Output Indication	AC Drive Operating, Frequency Alarmed, Non-zero, Base Block, Fault Indication, Local/Remote Indication, PLC Operation Indication, Auxiliary Motor Output, Drive is Ready, Overhaul, Alarm, Emergency Stop	
	Analog Output Signal	Analog Output Signal	Analog frequency/current signal output, 1 from C contact or open collector output
Alarm Output Contact		1 from C contact or open collector output	
Operation Functions		Parameter Setting	A/R, S-Curve, Over-Voltage, Over-Current, Stall Prevention, Fault Records, Adjustable Carrier Frequency, DC Braking, Momentary Power Loss restart, Auto Tuning, Frequency Limits, Parameter Lock/Reset, Vector Control, Counter, PID Control, PLC, MODBUS Communication, Reverse inhibition, abnormal reset, abnormal re-start, digital frequency output, sleep/prevent function, 1 selected frequency source selection
		Protective Functions	Self-testing, Over Voltage, Over Current, Under Voltage, Overload, Overheating, External Fault, Electronic thermal, Ground Fault
		Display Keypads	6-key, 4-digit, 7-segment LED, 4 status LEDs, master frequency, output frequency, Output current, custom units, parameter values for setup, review and faults, RUN, STOP, RESET, FWD/REV
		Protection Level	IP20
		Pollution Degree	2
		Installation Location	Altitude 1,000m or less, keep from corrosive gas, liquid and dust
		Ambient Temperature	-10°C to 40°C (-10°C to 50°C without blind plate) Non-Condensing and not frozen
		Storage / Transportation Temperature	-20°C to 60°C
	Ambient Humidity	Below 90% RH (non-condensing)	
	Vibration	9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6G) at 20 to 50Hz	
Approvals		CE, UL, ENEC	