

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity Aerospace, Defense and Marine
1045633-1](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Hermetically Sealed (Continued)

**Panel Feed-through
 Hermetic Adapter
 Jack to Jack¹**



Electrical
 VSWR (GHz) — 1.10 + .01f
 RF Leakage (dB) — -(100 - fGHz)

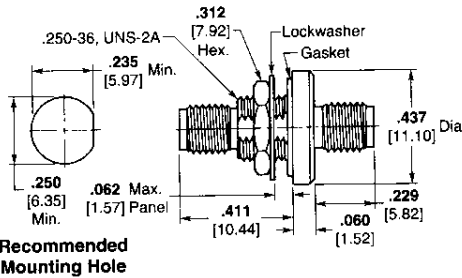


**Recommended
 Mounting Hole**

M/A-COM Part No. (Ref. Only)	AMP Part No.
1084-1100-00	1045725-1

**O-Ring Gasket Hermetic Seal
 Flange Mount Jack Receptacle^{1,2}**



Electrical
 VSWR (GHz) — 1.05 + .01f
 RF Leakage (dB) — -(70 - fGHz)

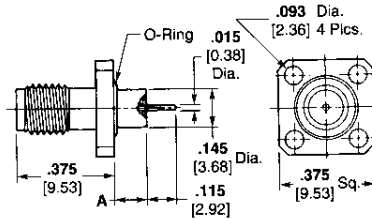


M/A-COM Part No. (Ref. Only)	AMP Part No.	Dim. A
1052-3121-00	1045593-1	.093 2.36

Rear Mount Jack Receptacle^{1,2}



Electrical
 VSWR (GHz) — 1.05 + .014f
 RF Leakage (dB) — -(70 - fGHz)

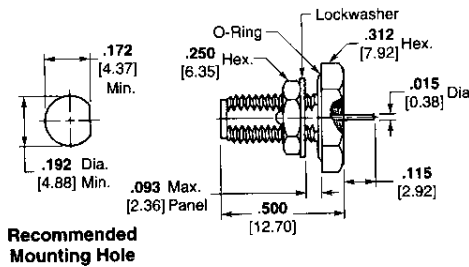


**Recommended
 Mounting Hole**

M/A-COM Part No. (Ref. Only)	AMP Part No.
1056-3100-00	1045633-1

**Bulkhead Feed-through
 Front Mount Jack Receptacle**



Electrical
 VSWR (GHz) — 1.05 + .01f
 RF Leakage (dB) — -(70 - fGHz)



M/A-COM Part No. (Ref. Only)	AMP Part No.
1058-3100-00	1045642-1

1. Finish: Gold plate, -00. For passivated stainless steel, change the Part Number suffix from -00 to -02.
 2. On passivated versions (-02), pins are pre-tinned using Sn60 solder.