

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[1297](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 1297
BNC (Female) To Standard 1/4"
Two Conductor Phone Plug

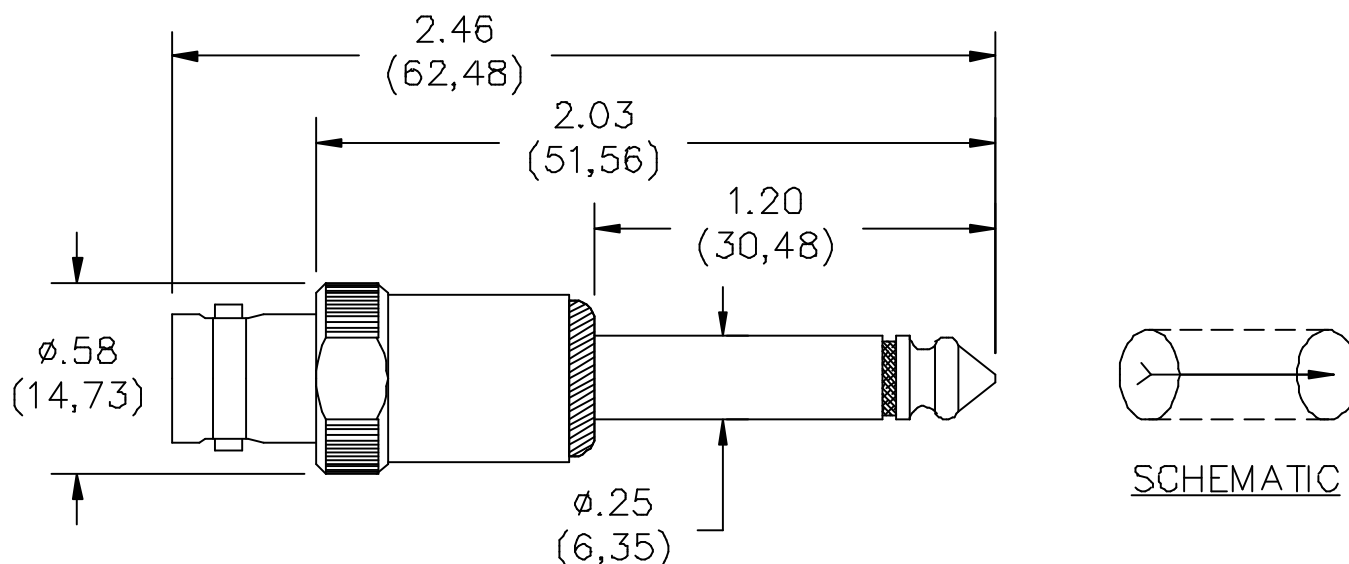

FEATURES:

- Enables interconnection between telephone equipment and BNC based test instruments.
- Readily adapters standard phone jacks for BNC Cables.
- BNC (Female) contact is gold plated Beryllium Copper for noise free connection.
- Adapter is tarnish resistant for good lab appearance.

MATERIALS:

BNC (Male): Body – Brass, Tarnish Resistant

Center Contact: Beryllium Copper, Gold Plated

Dielectric: PTFE

Handle: Brass, Nickel Plated

Phone Plug (Two Conductors): Brass, Nickel Plated

RATINGS:

Operating Voltages: 500 VRMS

Operating Temperature: +125°C (+257°F)

Impedance: 50 Ohms

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Pomona[®]

Model 1297
BNC (Female) To Standard 1/4"
Two Conductor Phone Plug

ORDERING INFORMATION: Model 1297

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA