

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pulse Electronics Corporation](#)
[W3032](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

900 MHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 8.25 mm

Pulse Part Number: W3032



Features

- Omnidirectional radiation
- Low profile
- Compact size W x L x H (10 x 3.2 x 4 mm)
- Low weight (600 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

Applications

- E-GSM 900 Band
- 925-960 MHz

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

RX Diversity 925-960 MHz

Typical performance (test board size 100 x 37 mm, PWB ground clearance area 10.60 x 8.25 mm)

Frequency Range [MHz]	Linear Max Gain [dBi]	Efficiency [%] / [dB]	Return Loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
925-960	2 (peak) 0 (band edges)	65 / -1.9 (peak) 45 / -3.5 (band edges)	-5	50	-40 to +85

Pulse Antennas

Takatie 6
 90440 Kempele, Finland
 Tel: +358 207 935 500
 Fax: +358 207 935 501
www.pulseeng.com/antennas

W3032 Datasheet version 1.0. 12/2006

900 MHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 8.25 mm

Typical Electrical Characteristics (T=25 °C)

Measured on the 100 x 37 mm test board

Typical Return Loss S11/impedance


GSM 900 RX Diversity

15 Sep 2006 10:22:18

CH1Markers

1. -5.3044 dB 925.000 MHz
2. -16.663 dB 942.000 MHz
3. -5.4544 dB 960.000 MHz

CH1 S11 LOG 5 dB/REF 0 dB

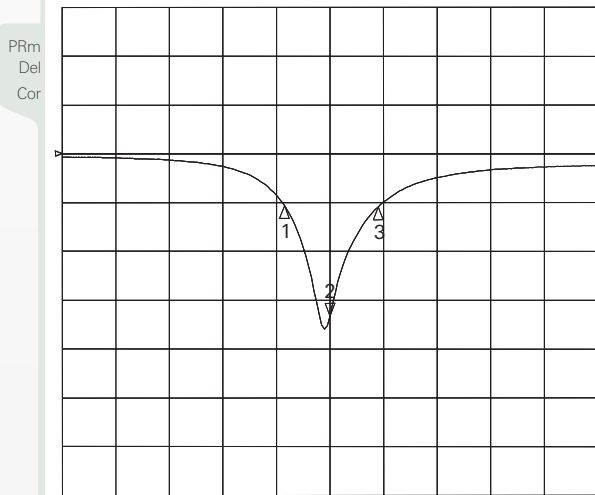

CENTER 942.000 000 MHz

SPAN 200.000 000 MHz

GSM 900 RX Diversity

15 Sep 2006 10:23:29

CH1Markers


1. 18.497 Ω 31.482 Ω 925.000 MHz
2. 45.139 Ω 5.9180 Ω 999.87 pH
3. 15.538 Ω -9.7031 Ω 960.000 MHz

CH1 S11 1 U FS

PRm

Del

Cor

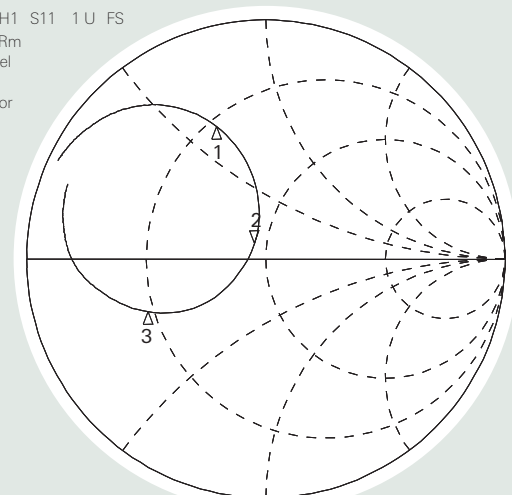

CENTER 942.000 000 MHz

SPAN 200.000 000 MHz

Free space efficiency and maximum gain

RX Diversity 925-960 MHz



RX Diversity 925-960 MHz



Pulse Antennas

Takatie 6

90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501





www.pulseeng.com/antennas

W3032 Datasheet version 1.0. 12/2006

900 MHz RX Diversity Ceramic Antenna

Ground cleared under antenna, clearance area 10.60 x 8.25 mm

Typical Free Space Radiation Patterns

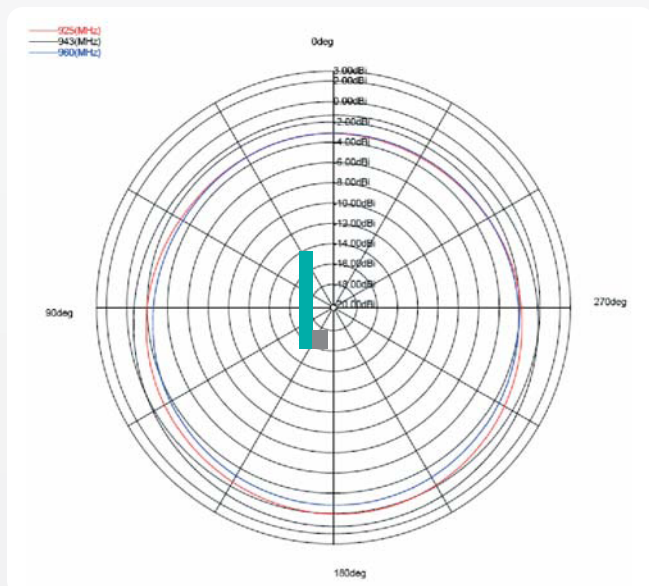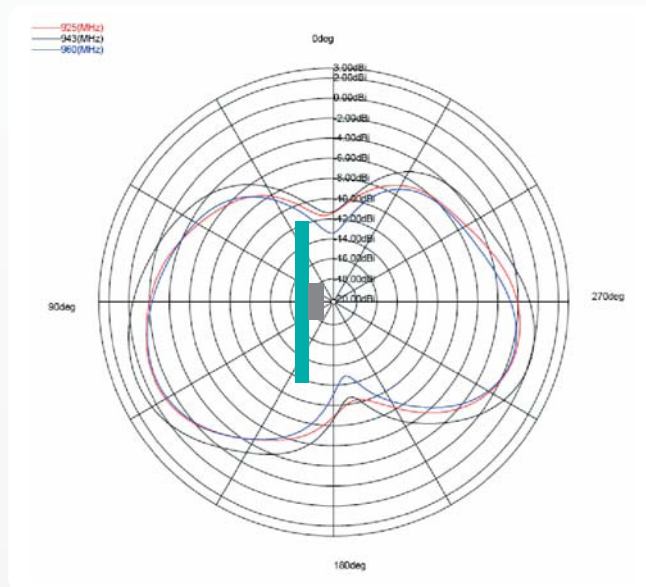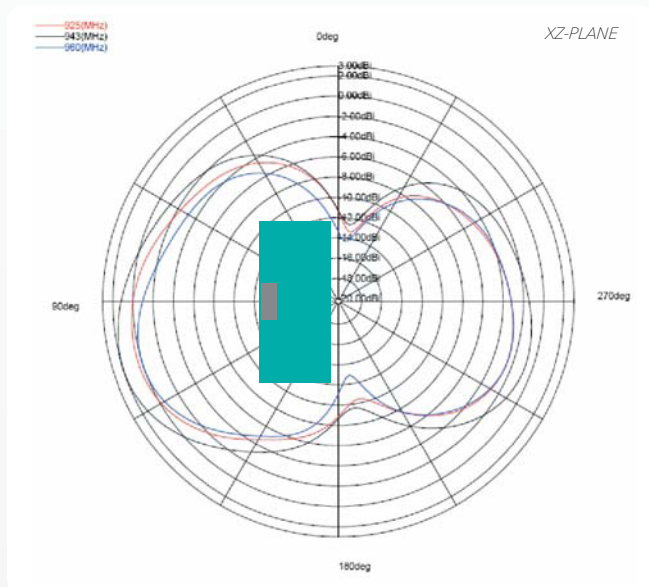

Pulse Antennas

Takatie 6
 90440 Kempele, Finland
 Tel: +358 207 935 500
 Fax: +358 207 935 501
www.pulseeng.com/antennas