

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions](#)
[V3L-1084](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3L-1084

CQ-L9933

REPLACES X89865-V3L

RELEASE NO. PR-16900

CATALOG LISTING

V3L-1084

M

ISSUE
2

CHECK

REVISIONS

A	CO	178446
	DCS	1 FEB 94



CHECK

CHECK

G R T 15 NOV 88

DDM/CAD


DRAWN

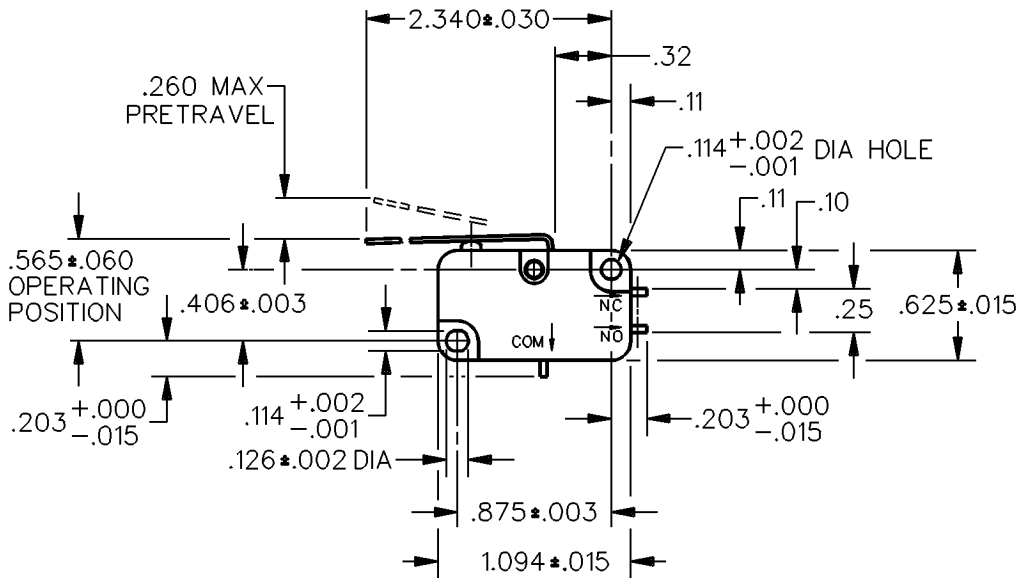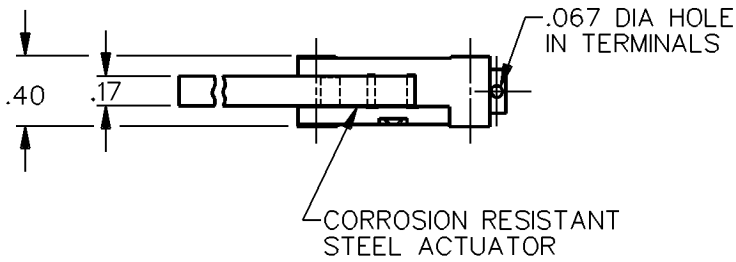

NOTE
 1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 4 OZ MAX
 RELEASE FORCE — — — — 1/2 OZ MIN
 DIFFERENTIAL TRAVEL — — — .090 MAX
 OVERTRAVEL — — — — — .150 MIN
 RELEASE TRAVEL — — — — — .021 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

L83
 15.1A 1/2HP 125 OR 250 VAC
 1/2A 125 VDC, 1/4A 250 VDC
 5A 125 VAC "L"

SCALE FULL DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE (.0)		± .030
TWO PLACE (.00)		± .015
THREE PLACE (.000)		± .005
ANGLES		±
WEIGHT		

