

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)
[MS3108E18-19P](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

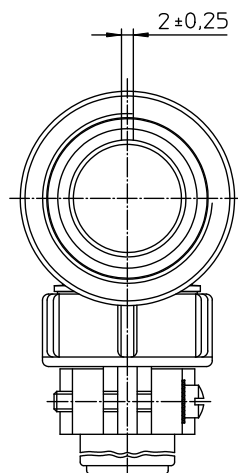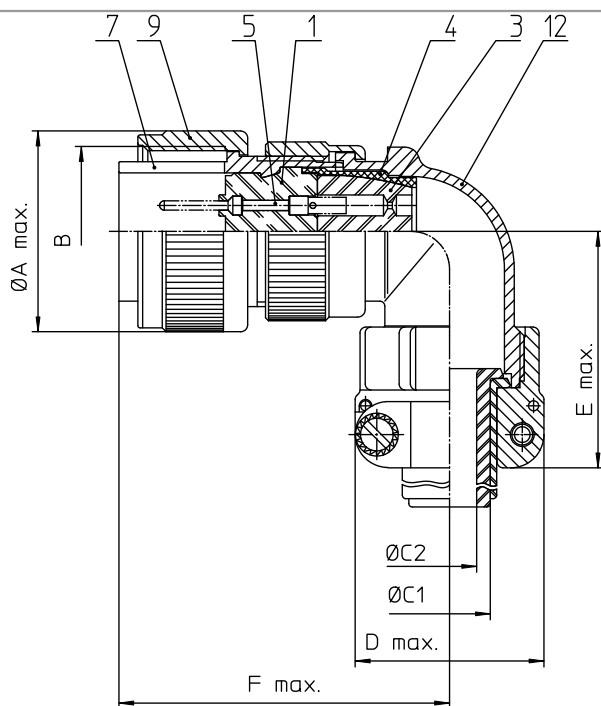

NO.	MASSE / DIMENSION
A	34.1
B	1 1/8-18NEF-2B
C1	14.3
C2	-
D	32.2
E	53
F	58

NO.	BESCHREIBUNG / DESCRIPTION
1	ISOLIERKÖRPER STIFT / INSULATOR PIN
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
5	KONTAKTSTIFT / CONTACT PIN
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.	
Specification and Dimensions subject to change	
Drawings illustrate normal insulator positioning	
Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Olive drab chromate coating over cadmium plating
Insulator Material:	Neoprene
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm		drawing for		
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m		CUSTOMER		
 ITT <i>Engineered for life</i> ITT CANNON GmbH 11100 Wiesbaden/Germany	description			
	MS3108E18-19P			
	Plug 90°			
	Endbell with clamp and bushing			
Solder Cup / Pin / Layout: 18-19		page	revision	
© All rights reserved. Reproduction or issue in kind is only then		1/1	377 3, Jul 16	
allowed is only permitted with written authorization of ITT Cannon				